



HAMMERS - MALLETS

562




- Graphite handle hammer 562
- Hickory handle hammers 566
- Sledge hammers and mallets..... 570

SOFT FACE HAMMERS

571



- Dead-blow hammers 571
- Interchangeable-tip mallets 572

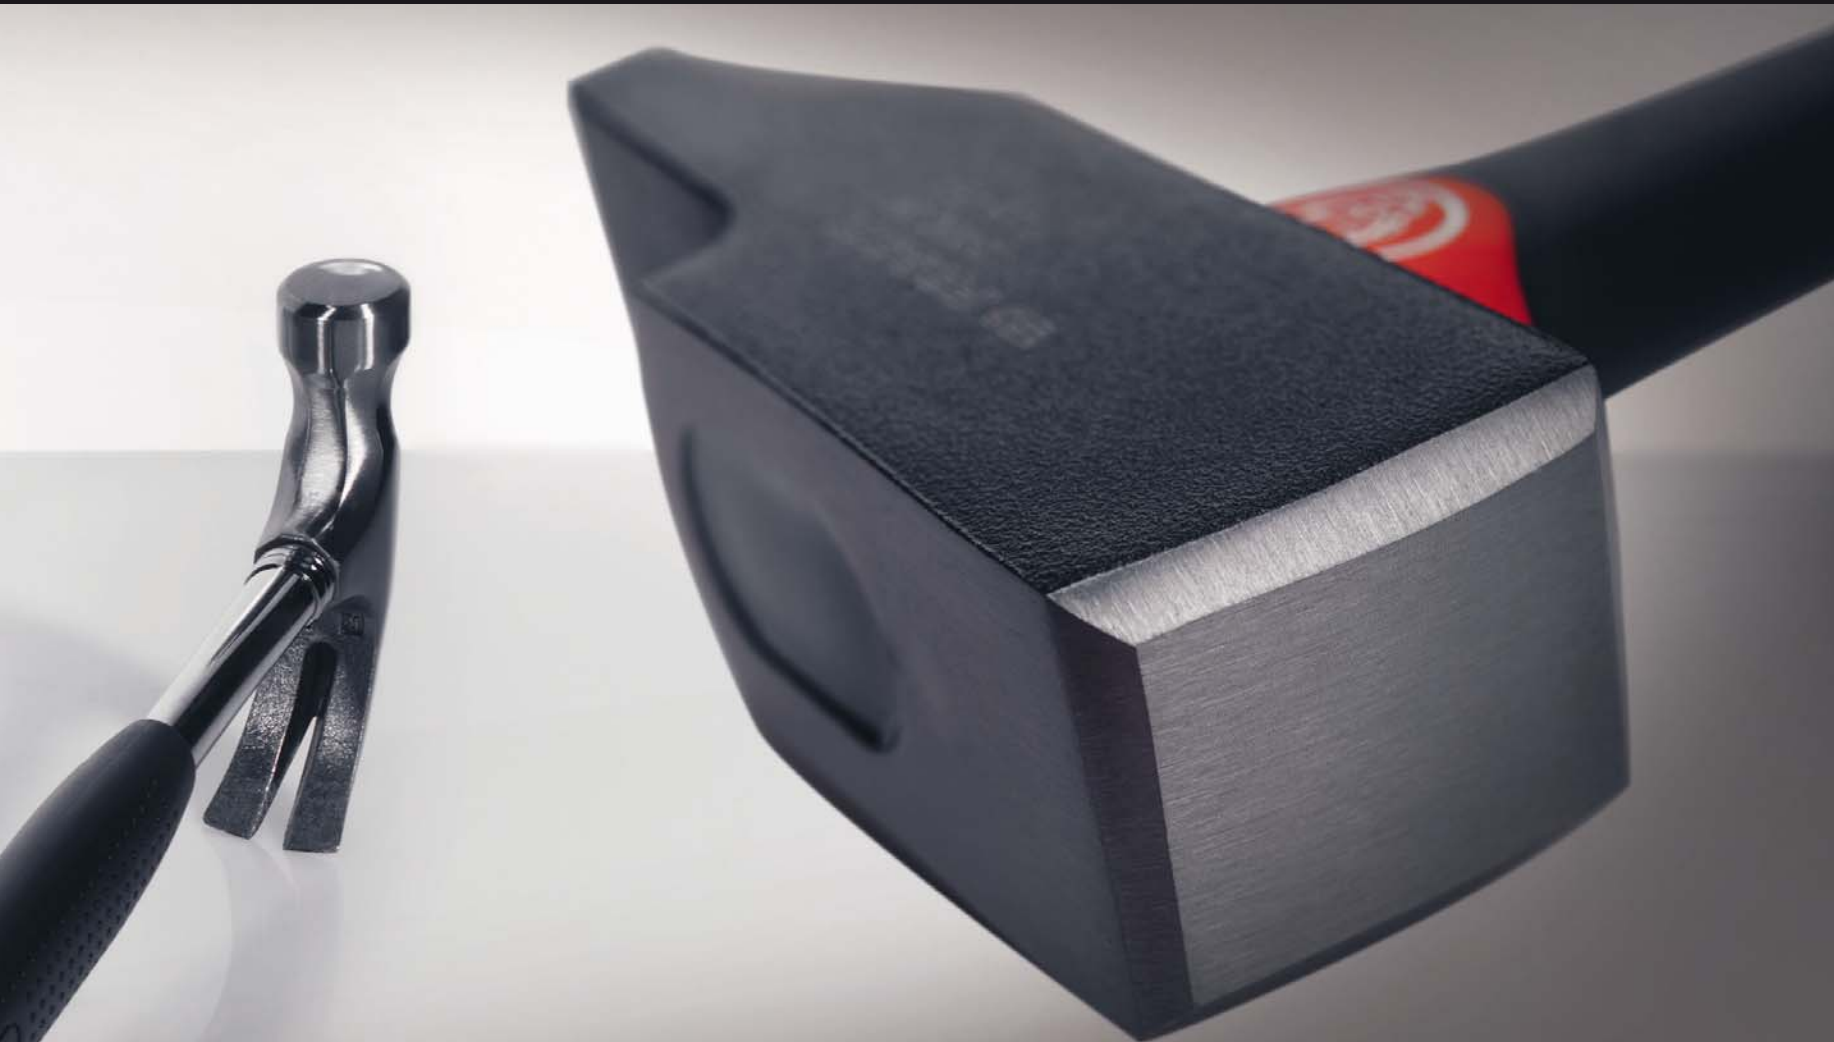

IMPACT TOOLS


574



| | |
|------------------------------------|-----|
| Drifts | 574 |
| Poly-impact sets | 575 |
| Sheathed series impact tools | 576 |
| Drift punches | 576 |
| Nail-sets | 576 |
| Nail-sets | 576 |
| Centre punches | 577 |



| | |
|-----------------------------------|-----|
| Sets and modules | 577 |
| Flat chisels - Cape chisels | 582 |

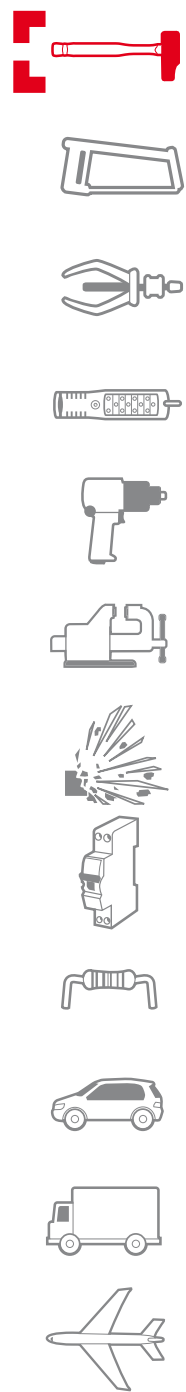

Graphite handle hammer



HAMMER WITH GRAPHITE HANDLE


THE SAFE HAMMER

Maximum safety.

- Permanent epoxy resin head-to-handle connection.
- Unbreakable.

Total comfort

- Anti vibration : absorbent material and narrow upper handle profile to reduce vibration.

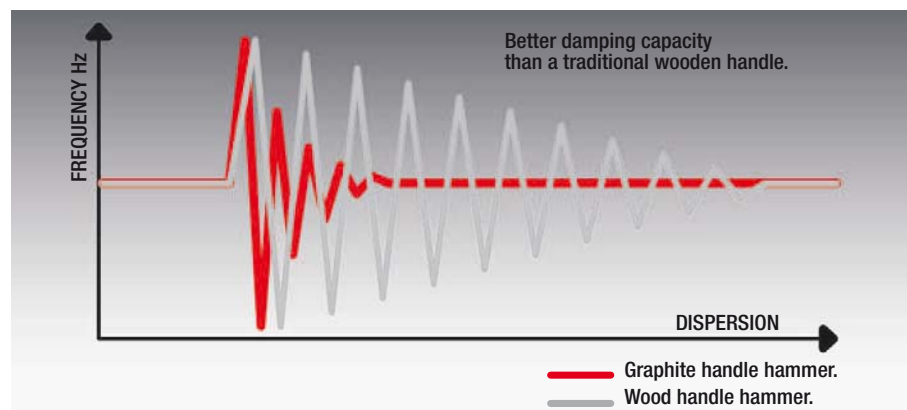

Positive grip

- Soft elastomer handle for a comfortable hold.
- Wide guard to prevent loss of grip.

A combination of 3 materials for a perfect result

1 - Graphite:


For strength. No risk of breakage.

2 - Polypropylene:

For reduced vibration.

3 - Elastomer:

For a perfect grip and excellent resistance to corrosive workshop liquids.

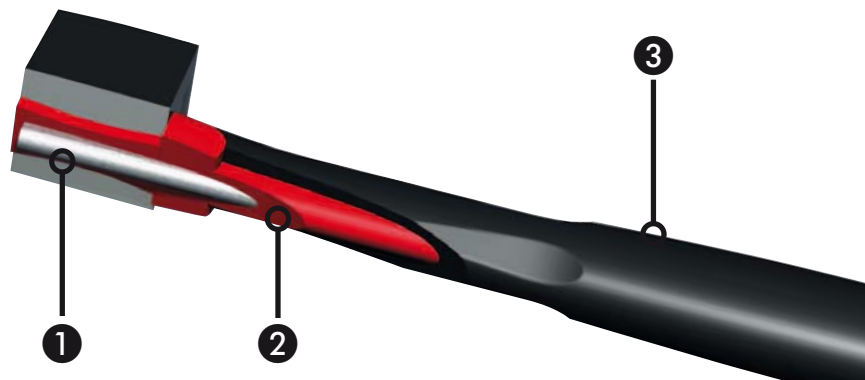

200 C

205 C




SAFETY FIRST

Wear eye protection.



200C - Graphite handle riveting engineers hammer




NF E 71-016, NF ISO 15601, ISO 15601

- Ergonomic safety handle with graphite core.

| ➤ | L [mm] | L1 [mm] | L2 [mm] | ΔΔ [kg] |
|----------------|--------|---------|---------|---------|
| 200C.26 | 245 | 80 | 25 | 0,345 |
| 200C.28 | 270 | 88 | 28 | 0,380 |
| 200C.30 | 270 | 93 | 30 | 0,470 |
| 200C.32 | 300 | 100 | 32 | 0,585 |
| 200C.36 | 300 | 106 | 35 | 0,725 |
| 200C.40 | 330 | 108 | 40 | 1,025 |
| 200C.42 | 330 | 117 | 42 | 1,130 |
| 200C.50 | 360 | 138 | 50 | 1,910 |
| 200C.60 | 380 | 151 | 60 | 2,800 |


205C - Graphite handle DIN engineers hammer

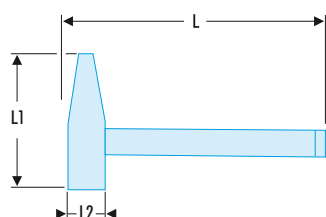

NF ISO 15601, ISO 15601, DIN 1041

- Ergonomic safety handle with graphite core.

| ➤ | L [mm] | L1 [mm] | L2 [mm] | ΔΔ [kg] |
|-----------------|--------|---------|---------|---------|
| 205C.20 | 280 | 96 | 19 | 0,250 |
| 205C.30 | 300 | 106 | 23 | 0,380 |
| 205C.50 | 320 | 122 | 27 | 0,580 |
| 205C.80 | 350 | 132 | 33 | 0,960 |
| 205C.100 | 360 | 137 | 36 | 1,140 |

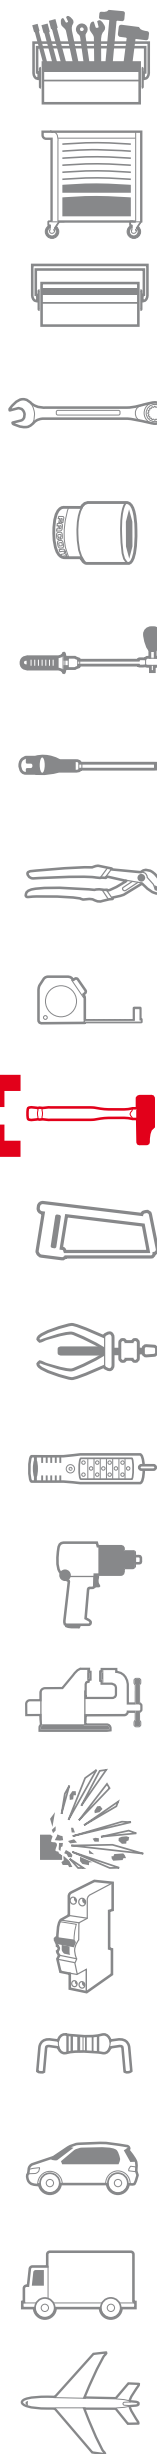

▣ MOD.MI7 Impact tools module 205C



- Comprising:
 - 205C.50: composite hammer 500 g.
 - 208A.32CB: steel mallet 32 mm.
 - 248. 4-5-6 mm: long drift punches.
 - 263.18: chisel.
 - 256.6: punch.
 - Heat-formed tray PL.333.
- Weight: 1.660 kg.

▣ MODM.MI5 Impact tools 205C long sheathed drift punches foam module



- Comprising:
 - 205C.50: DIN composite hammer 500 g.
 - 208A.32CB: steel mallet 32 mm.
 - 263.G19: sheathed chisel 190 mm.
 - 256.6: punch accuracy 6 mm.
 - 249.G 4 - 5 - 6 mm: 3 long-reach sheathed drift punches.
 - Foam tray PM.MODMI5.
- Weight: 1.750 kg.

▣ MODM.MI6 Impact tools 200C foam module



- Comprising:
 - 200C.40: composite riveting hammer 40 mm.
 - 208A.32CBA: steel mallet 32 mm.
 - 256.6: punch accuracy 6 mm.
 - 263.G19: sheathed chisel 190 mm.
 - 249.G 4 - 5 - 6 mm: sheathed drift punches.
 - Foam tray PM.MODMI6.
- Weight: 2.150 kg.

▣ MODM.MI7 Impact tools 205C long drift punches foam module



- Comprising:
 - 205C.50: DIN composite hammer 500 g.
 - 208A.32CBA: steel mallet 32 mm.
 - 256.6: punch accuracy 6 mm.
 - 263.18: chisel.
 - 248. 4 - 5 - 6 mm: long drift punches.
 - Foam tray PM.MODMI7.
- Weight: 1.700 kg.

WOOD HANDLE HAMMER

SAFE, ERGONOMIC AND COMFORTABLE


Head.

"High security" triple wedge handle attachment:

- 2 steel + 1 wooden wedge for a better distribution of contact surfaces between the handle and the head.

Head very firmly secured on the handle:

- Precise heat treatment of the head.

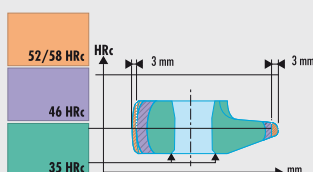

Handle.

Hickory:

- Excellent mechanical strength.
- Unaffected by climatic differences.

Octagonal handle profile:

- Exclusive to FACOM.
- Best compromise between mechanical strength and absorption of vibration.




GROWTH RING

Our handles are made only from blocks with a strictly defined number of growth rings : as this determines the rate of growth of the tree. Fast growth, few rings, low density wood and thus low mechanical strength.




Always inspect a hammer before use. If damaged in any way, discard it. Watch out for:

- Excessively worn or mushroomed head.
- Suspect fit.
- Scored handle.


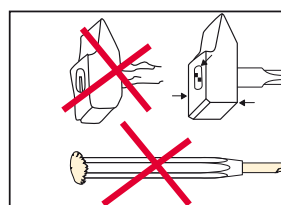


For safety, the hammer should hit dead square in the centre of the face.

Steady precise blows extend tool life.




Flying chips are dangerous. Never hammer materials harder than 46 HRc. Use a FACOM mallet instead.

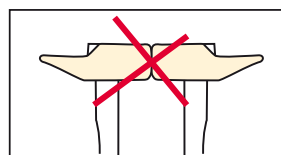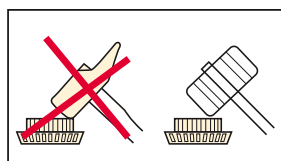


SAFETY FIRST

Wear eye protection.

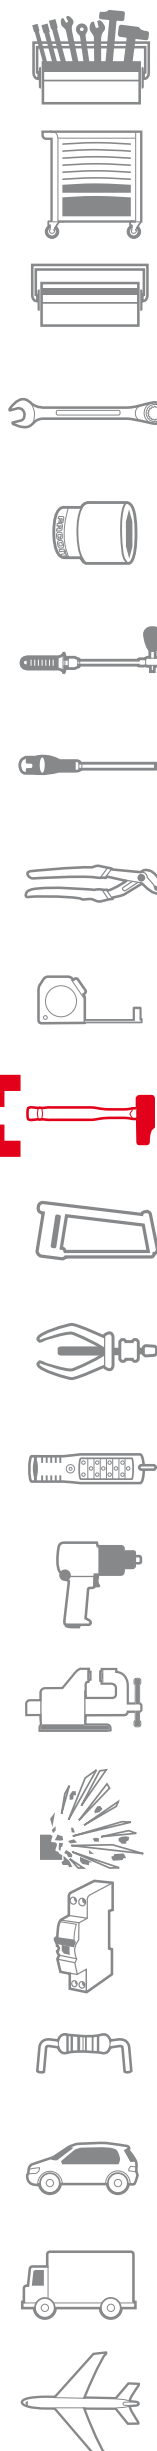

Hickory handle hammers

200H - Riveting engineers hammers

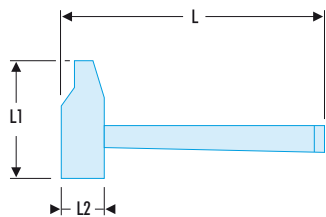

NF E 71-016, NF ISO 15601, ISO 15601

- "High safety" hickory handle, triple fit: 2 steel wedges and 1 wood wedge.

| ⇒ | L [mm] | L1 [mm] | L2 [mm] | Handle | ΔΔ [kg] |
|----------------|--------|---------|---------|-----------|---------|
| 200H.26 | 245 | 80 | 25 | 210.MHB01 | 0,345 |
| 200H.28 | 270 | 88 | 28 | 210.MHB02 | 0,380 |
| 200H.30 | 270 | 93 | 30 | 210.MHB03 | 0,470 |
| 200H.32 | 300 | 100 | 32 | 210.MHB04 | 0,585 |
| 200H.36 | 300 | 106 | 35 | 210.MHB04 | 0,725 |
| 200H.40 | 330 | 108 | 40 | 210.MHB05 | 1,025 |
| 200H.42 | 330 | 117 | 42 | 210.MHB05 | 1,130 |
| 200H.50 | 360 | 138 | 50 | 210.MHB06 | 1,910 |
| 200H.60 | 380 | 151 | 60 | 210.MHB27 | 2,800 |

MOD.MI1 Impact tools module 200H




- Comprising:
 - 200H.32: hickory riveting hammer 32 mm.
 - 208A.32CBA: steel mallet 32 mm.
 - 263.20: chisel.
 - 256.6: punch.
 - 248. 4 - 5 - 6 mm: long drift punches.
 - Heat-formed tray PL.333.
- Weight: 1.800 kg.

MODM.MI1 Impact tools 200H foam module



- Comprising:
 - 200H.40: hickory riveting hammer 40 mm.
 - 208A.32CBA: mallet.
 - 263.20: chisel.
 - 256.6: punch accuracy 6 mm.
 - 248. 4 - 5 - 6 mm: 3 long drift punches.
 - Foam tray PM.MODMI1.
- Weight: 1.800 kg.

205H - DIN engineers hammers



NF ISO 15601, ISO 15601, DIN 1041

- "High safety" hickory handle, triple fit: 2 steel wedges and 1 wood wedge.

| ⇒ | L [mm] | L1 [mm] | L2 [mm] | Handle | ΔΔ [kg] |
|-----------------|--------|---------|---------|-----------|---------|
| 205H.20 | 280 | 96 | 19 | 210.MHB12 | 0,250 |
| 205H.30 | 300 | 106 | 23 | 210.MHB13 | 0,380 |
| 205H.50 | 320 | 122 | 27 | 210.MHB14 | 0,580 |
| 205H.80 | 350 | 132 | 33 | 210.MHB15 | 0,960 |
| 205H.100 | 360 | 137 | 36 | 210.MHB16 | 1,140 |

MOD.MI3 Impact tools module 205H



- Comprising:
 - 205H.50: DIN 500 g hickory hammer.
 - 208A.32CBA: steel mallet 32 mm.
 - 263.18: chisel.
 - 256.6: punch.
 - 248. 4 - 5 - 6 mm: 3 long drift punches.
 - Heat-formed tray PL.333.
- Weight: 1.710 kg

MODM.MI3 Impact tools 205H foam module




- Comprising:
 - 205H.100: DIN 1 kg hickory hammer.
 - 208A.32CBA: mallet.
 - 263.20: chisel.
 - 256.6: punch accuracy 6 mm.
 - 248. 4 - 5 - 6 mm: 3 long drift punches.
 - Foam tray PM.MODMI3.
- Weight: 1.800 kg.




WOOD HANDLE HAMMERS

IMPACT TOOL SAFETY:

- Check the condition of the tool before use.
- Do not use tools with traces of wear, mushrooming, scaling or cracks.
- Wear eye protection and gloves.

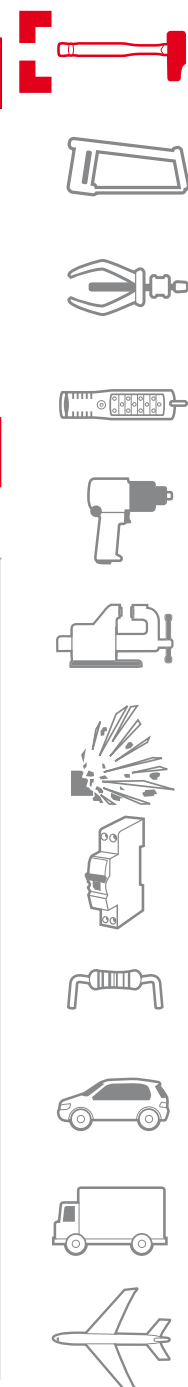

202H - Ball head engineers hammers

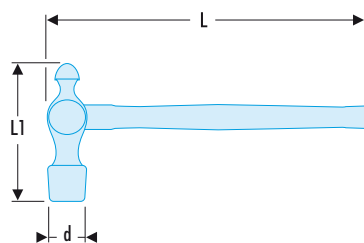

NF ISO 15601, ISO 15601, ASME B107.400

- "High safety" hickory handle, steel wedge.

| Ref | d [mm] | L [mm] | L1 [mm] | Handle | $\Delta\Delta$ [kg] |
|-------------------|--------|--------|---------|-----------|---------------------|
| 202H.1/4 | 20 | 275 | 65 | 210.MHB07 | 0,140 |
| 202H.1/2 | 26 | 297 | 84 | 210.MHB08 | 0,280 |
| 202H.1 | 31 | 322 | 104 | 210.MHB09 | 0,430 |
| 202H.1'1/2 | 37 | 363 | 123 | 210.MHB10 | 0,840 |
| 202H.2 | 40 | 394 | 128 | 210.MHB11 | 1,110 |

MOD.MI4 Impact tools module 202H




- Comprising:
 - 202H.1/2: hickory American hammer.
 - 208A.32CBA: steel mallet 32 mm.
 - 263.18: chisel.
 - 256.6: punch.
 - 248. 4 - 5 - 6 mm: 3 long drift punches.
 - Heat-formed tray PL.333.
- Weight: 1.450 kg.

MODM.MI4 Impact tools 202H foam module



- Comprising:
 - 202H.1: 1LB: hickory American hammer.
 - 208A.32CB: steel mallet 32 mm.
 - 263.20: chisel.
 - 256.6: punch accuracy 6 mm.
 - 248. 4 - 5 - 6 mm: 3 long drift punches.
 - Foam tray PM.MODMI4.
- Weight: 1.800 kg.

860H - Dinging hammers, round face

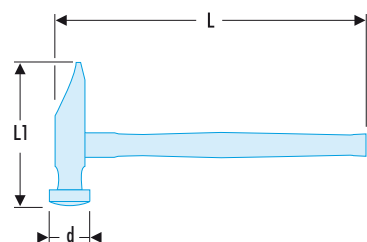


NF ISO 15601, ISO 15601

- "High safety" hickory handle, triple fit: 2 steel wedges and 1 wood wedge.

| 🚧 | d [mm] | L [mm] | L1 [mm] | Handle | $\Delta\Delta$ [kg] |
|----------------|--------|--------|---------|-----------|---------------------|
| 860H.26 | 26 | 297 | 114 | 210.MHB26 | 0,340 |
| 860H.28 | 28 | 297 | 118 | 210.MHB26 | 0,370 |
| 860H.30 | 30 | 314 | 123 | 210.MHB28 | 0,440 |
| 860H.32 | 32 | 339 | 134 | 210.MHB29 | 0,570 |
| 860H.36 | 36 | 339 | 139 | 210.MHB29 | 0,700 |
| 860H.40 | 40 | 377 | 149 | 210.MHB31 | 0,920 |

Dinging hammer, square face

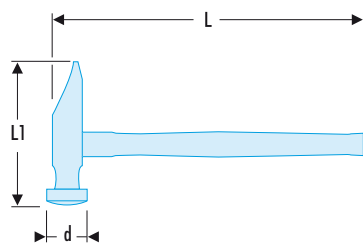


NF ISO 15601, ISO 15601

- "High safety" hickory handle, triple fit: 2 steel wedges and 1 wood wedge.

| 🚧 | d [mm] | L [mm] | L1 [mm] | Handle | $\Delta\Delta$ [kg] |
|----------------|--------|--------|---------|-----------|---------------------|
| 859H.28 | 28 | 319 | 140 | 210.MHB34 | 0,560 |

213H - Welders chipping hammers




NF ISO 15601, ISO 15601, DIN 6465

- "High safety" hickory handle, triple fit: 2 steel wedges and 1 wood wedge.

| ➤ | L [mm] | L1 [mm] | L2 [mm] | Handle | ΔΔ [kg] |
|----------------|--------|---------|---------|-----------|---------|
| 213H.30 | 270 | 170 | 21 | 210.MHB32 | 0,340 |
| 213H.40 | 270 | 180 | 21 | 210.MHB32 | 0,480 |

203H - Electricians hammer




NF E 71-016, NF ISO 15601, ISO 15601

- "High safety" hickory handle, triple fit: 2 steel wedges and 1 wood wedge.

| ➤ | L [mm] | L1 [mm] | L2 [mm] | ΔΔ [kg] |
|----------------|--------|---------|---------|---------|
| 203H.16 | 237 | 141 | 16 | 0,160 |
| 203H.18 | 237 | 142 | 18 | 0,200 |

215H - Joiners hammers




NF E 71-016, NF ISO 15601, ISO 15601

- "High safety" hickory handle, triple fit: 2 steel wedges and 1 wood wedge.

| ➤ | L [mm] | L1 [mm] | L2 [mm] | ΔΔ [kg] |
|----------------|--------|---------|---------|---------|
| 215H.20 | 264 | 91 | 20 | 0,210 |
| 215H.22 | 283 | 99 | 22 | 0,270 |
| 215H.26 | 285 | 109 | 26 | 0,360 |


Carpenters hammer



ASME B107.400


- Safety fit tubular handle, PVC grip.
- Head balanced with nail-puller peen.
- Presentation: polished finish.

| ➤ | d [mm] | L [mm] | L1 [mm] | ΔΔ [kg] |
|------------|--------|--------|---------|---------|
| 204 | 30 | 335 | 130 | 0,810 |

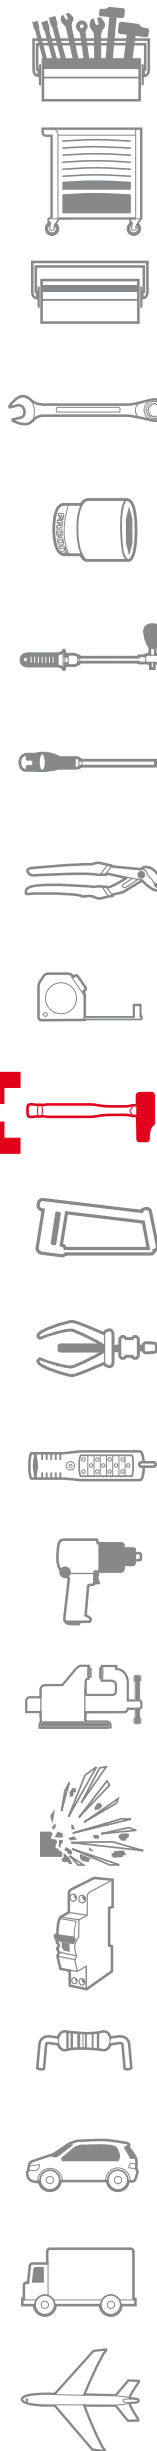

Sledge hammers and mallets

1262H - Beveled edge club hammers

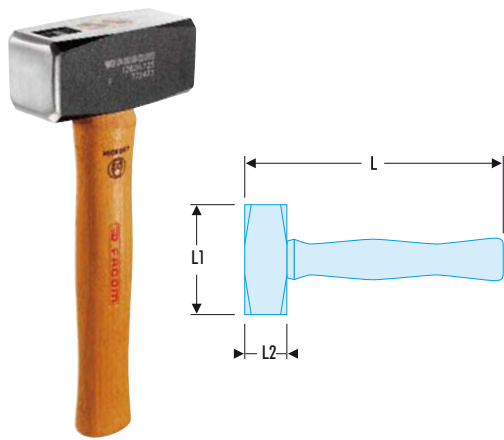


NF ISO 15601, ISO 15601, DIN 6475

- "High safety" hickory handle, triple fit: 2 steel wedges and 1 wood wedge.

| ➤ | L [mm] | L1 [mm] | L2 [mm] | Handle | $\Delta\Delta$ [kg] |
|------------------|--------|---------|---------|-----------|---------------------|
| 1262H.100 | 245 | 100 | 40 | 210.MHB22 | 1,000 |
| 1262H.125 | 248 | 105 | 43 | 210.MHB23 | 1,250 |
| 1262H.150 | 254 | 115 | 45 | 210.MHB24 | 1,500 |

High load club hammer

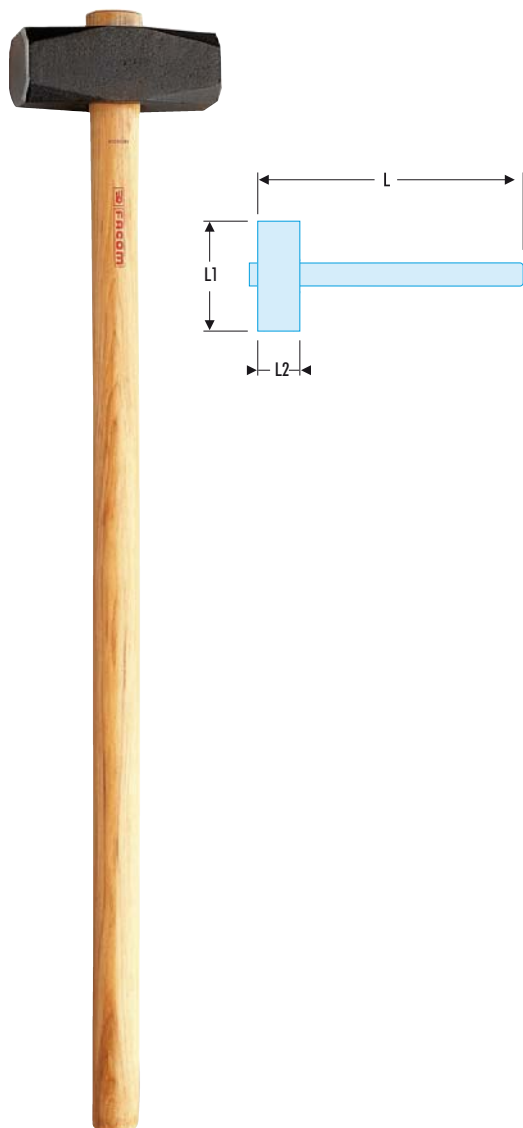


NF ISO 15601, ISO 15601, DIN 6475

- "High safety" hickory handle.

| ➤ | L [mm] | L1 [mm] | L2 [mm] | Handle | H [mm] | $\Delta\Delta$ [kg] |
|------------------|--------|---------|---------|-----------|--------|---------------------|
| 1263H.400 | 880 | 175 | 60 | 210.MHB35 | 60 | 4,800 |

209 - Wooden mallets

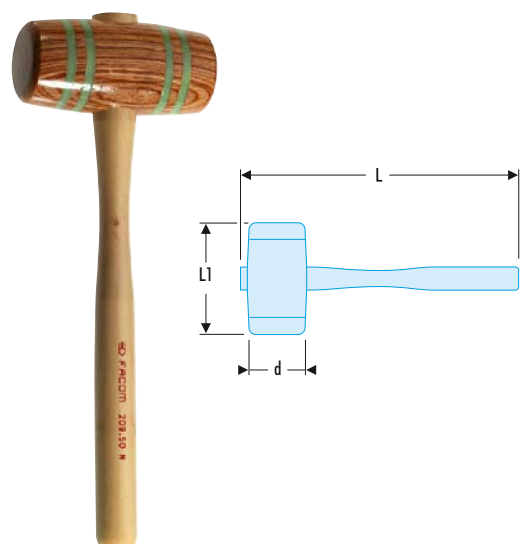

DIN 7462

- Model in compressed laminated wood.
- Shrunk-on rings embedded in glass fiber.
- Horn-beam handle.

| ➤ | d [mm] | L [mm] | L1 [mm] | $\Delta\Delta$ [kg] |
|---------------|--------|--------|---------|---------------------|
| 209.50 | 50 | 290 | 100 | 0,320 |
| 209.60 | 60 | 320 | 120 | 0,500 |

Dead-blow hammers

DEAD-BLOW HAMMERS




SAFE, ERGONOMIC AND COMFORTABLE

Deadening the blow


The head is half-filled with steel balls, the mass of which has sufficient inertia to counteract any tendency to bounce back. After striking, the face of the hammer remains in position, without the damaging effects of rebound when hammering home an accurate fit. The nylon or polyurethane striking faces remove the risk of lying chips when hitting hard metal objects.

"Monobloc" hammer in polyurethane

- In addition to the dead-blow feature the soft-face hammer 216 is fully moulded in a polyurethane shell.
- This monobloc design protects the head from splitting and the balls escaping in the workshop.
- The chemical-resistant polyurethane moulding gives the tips a far longer service life than conventional soft-faced hammers.

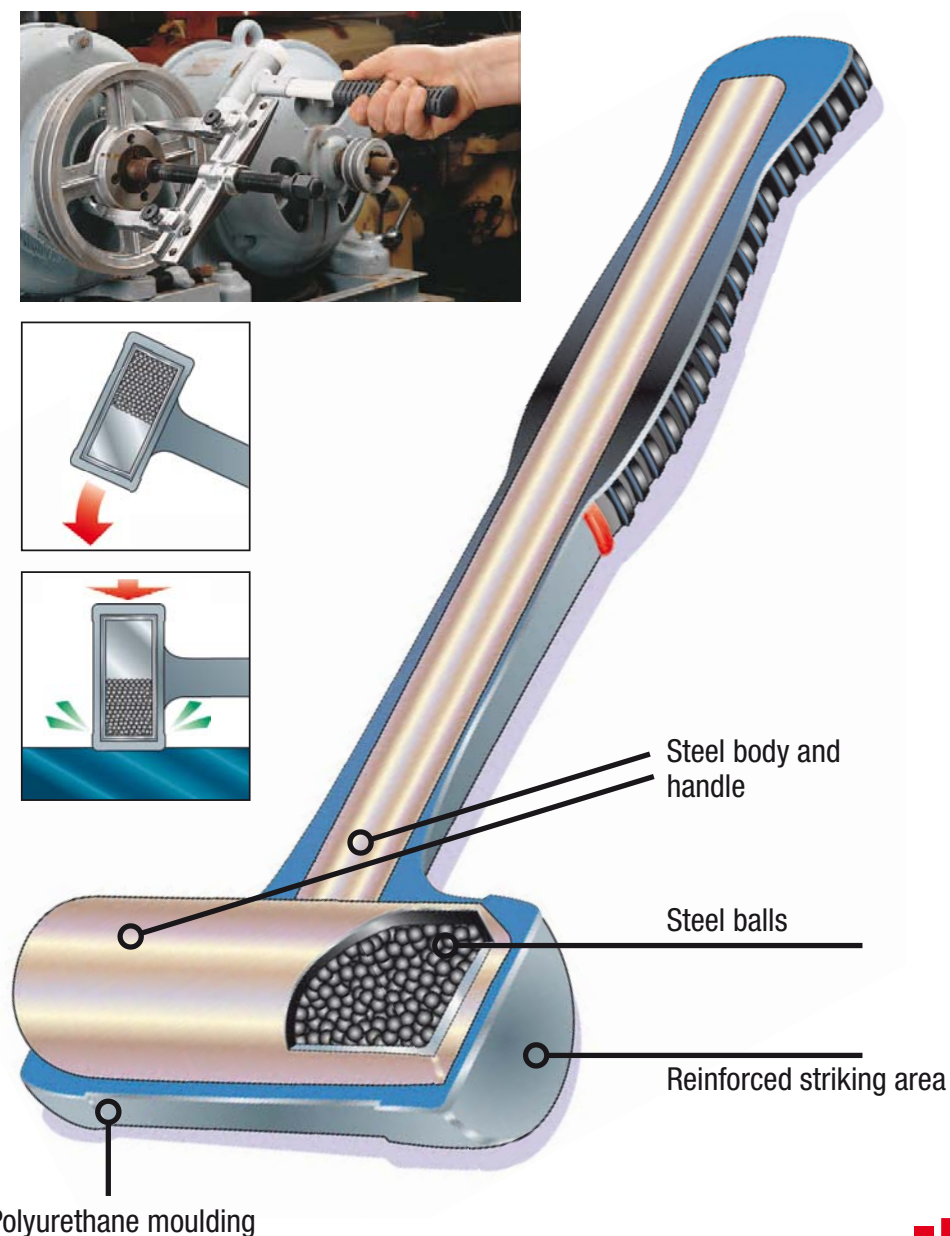


216 - One-piece dead-blow hammers




- Dead-blow hammer with steel microballs.
- Body and handle in steel coated with polyurethane.
- D45 ± 5 shore hardness impact surface.
- Ergonomic PVC grip.

| | d [mm] | L [mm] | L1 [mm] | ΔΔ [kg] |
|---------------|--------|--------|---------|---------|
| 216.40 | 40 | 298 | 110 | 0,657 |
| 216.50 | 50 | 308 | 115 | 0,888 |
| 216.60 | 60 | 316 | 120 | 1,316 |

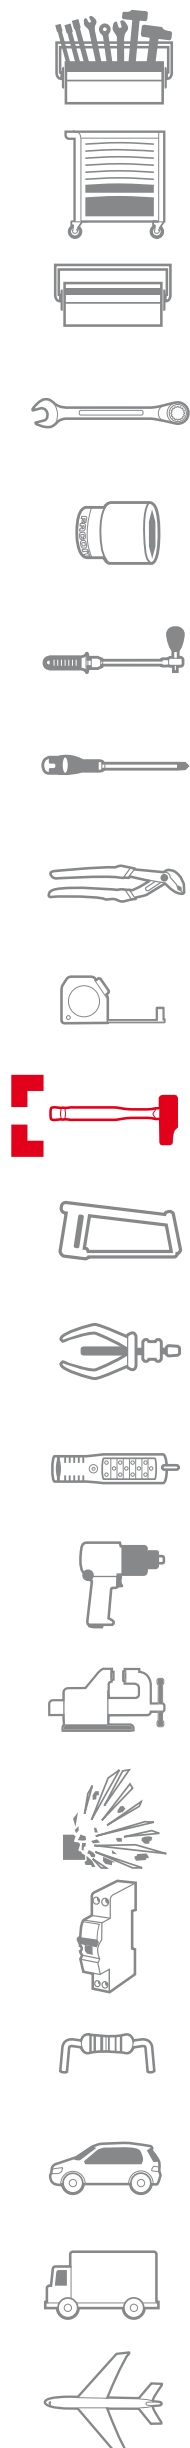

212A - Dead-blow hammers, interchangeable tips

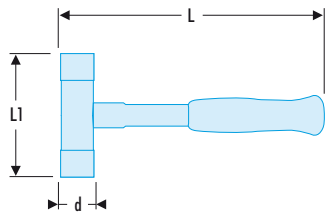

- Glass fiber handle.
- Steel body.
- Easily replaceable, special nylon tips shore hardness D74 ± 5.
- Ergonomic PVC grip.
- Presentation: black epoxy.
- Spare tip: 212.E35 to E60.

| 212A | d [mm] | L [mm] | L1 [mm] | Bits | ΔΔ[kg] |
|----------------|--------|--------|---------|---------|--------|
| 212A.35 | 35 | 305 | 112 | 212.E35 | 0,698 |
| 212A.40 | 40 | 310 | 117 | 212.E40 | 0,839 |
| 212A.50 | 50 | 320 | 120 | 212.E50 | 1,143 |
| 212A.60 | 60 | 330 | 145 | 212.E60 | 1,664 |

Adaptable-tip mallets

INTERCHANGEABLE-TIP MALLETS

IMPACT TOOL SAFETY:

- Check the condition of the tool before use.
- Do not use tools with traces of wear, mushrooming, scaling or cracks.
- Wear eye protection and gloves.



207A-208A - Adaptable-tip mallets



207A: Aluminum body "light" series hammers.
208A: Steel body "heavy" series hammers.

- Mallets are available with a limited number of tip combinations only, but you can customize your mallet by selecting a body and two tips of your choice.
- Tips available:
 - EA series: neoprene.
 - EB series: polyurethane.
 - EC series: nylon.

| 207A/208A | d [mm] | Finish | Bits | ΔΔ[kg] |
|-------------------|--------|-----------|---------|--------|
| 207A.25CB | 25 | Aluminium | EC - EB | 0,135 |
| 207A.32CB | 32 | Aluminium | EC - EB | 0,210 |
| 207A.40CB | 40 | Aluminium | EC - EB | 0,350 |
| 207A.50CB | 50 | Aluminium | EC - EB | 0,560 |
| 207A.60CB | 60 | Aluminium | EC - EB | 0,840 |
| 208A.25CBA | 25 | Mosiξdz | EC - EB | 0,220 |
| 208A.32CBA | 32 | Mosiξdz | EC - EB | 0,345 |
| 208A.32BBA | 32 | Mosiξdz | EB - EB | 0,350 |
| 208A.40CBA | 40 | Mosiξdz | EC - EB | 0,615 |
| 208A.40CCA | 40 | Mosiξdz | EC - EC | 0,620 |
| 208A.50CBA | 50 | Mosiξdz | EC - EB | 1,000 |
| 208A.60CBA | 60 | Mosiξdz | EC - EB | 1,550 |

207A-208A - Mallet tips



207A: Lightweight aluminum body, hickory handle.
208A: Heavyweight steel body, hickory handle.

| ➤ | d [mm] | L [mm] | Handle | Finish | ΔΔ[kg] |
|-----------------|--------|--------|-----------|-----------|--------|
| 207A.25 | 25 | 280 | 210.MHB12 | Aluminium | 0,110 |
| 207A.32 | 32 | 300 | 210.MHB13 | Aluminium | 0,160 |
| 207A.40 | 40 | 323 | 210.MHB14 | Aluminium | 0,270 |
| 207A.50 | 50 | 350 | 210.MHB15 | Aluminium | 0,410 |
| 207A.60 | 60 | 363 | 210.MHB16 | Aluminium | 0,610 |
| 208A.25A | 25 | 280 | 210.MHB12 | Mosiξdz | 0,200 |
| 208A.32A | 32 | 300 | 210.MHB13 | Mosiξdz | 0,295 |
| 208A.40A | 40 | 323 | 210.MHB14 | Mosiξdz | 0,510 |
| 208A.50A | 50 | 350 | 210.MHB15 | Mosiξdz | 0,830 |
| 208A.60A | 60 | 363 | 210.MHB16 | Mosiξdz | 1,300 |

Spare tips for mallets



EA



EB



EC

• Tips:

EA: neoprene tips, hardness shore A75.

Replaces rubber mallets.



EB: thermoplastic polyurethane tips (TPU), hardness shore D56.

Replaces wood and leather mallets.

EC: nylon tips, hardness shore D68.

Replaces soft metal mallets (copper, lead, brass, aluminum).

| ➤ | d [mm] | Color | Bits |
|--------------|--------|-------|---------|
| EA.25 | 25 | Black | Neopren |
| EA.32 | 32 | Black | Neopren |
| EA.40 | 40 | Black | Neopren |
| EA.50 | 50 | Black | Neopren |
| EA.60 | 60 | Black | Neopren |
| EB.25 | 25 | Red | TPU |
| EB.32 | 32 | Red | TPU |
| EB.40 | 40 | Red | TPU |
| EB.50 | 50 | Red | TPU |
| EB.60 | 60 | Red | TPU |
| EC.25 | 25 | White | Nylon |
| EC.32 | 32 | White | Nylon |
| EC.40 | 40 | White | Nylon |
| EC.50 | 50 | White | Nylon |
| EC.60 | 60 | White | Nylon |



Punches and nail sets

214 - Standard drifts



- Steel body.
- Replaceable nylon tips shore hardness D74.
- Use with a hammer or by hand to fit or extract small parts or bearings.
- Replaces bronze or brass drifts.

| ➤ | d [mm] | L [mm] | Bits | $\Delta\Delta$ [kg] |
|---------------|--------|--------|---------|---------------------|
| 214.10 | 10 | 166 | 212.E10 | 0,100 |
| 214.15 | 15 | 175 | 212.E15 | 0,200 |

214.R - Dead-blow drifts



- Steel body with dead-blow design: the body is filled with steel balls preventing rebound after the shock.
- Replaceable nylon tips shore hardness D74.
- These large drifts can be used directly by hand to place parts delicately.

| ➤ | d [mm] | L [mm] | Bits | $\Delta\Delta$ [kg] |
|----------------|--------|--------|---------|---------------------|
| 214.R20 | 20 | 150 | 212.E20 | 0,220 |
| 214.R25 | 25 | 153 | 212.E25 | 0,330 |
| 214.R30 | 30 | 157 | 212.E30 | 0,460 |
| 214.R35 | 35 | 157 | 212.E35 | 0,620 |

Multi-impact tool sets

MULTI-IMPACT SYSTEM

DRIFTS AND PUNCHES

Parts protection


- Interchangeable tips of different hardness for parts that must not be marked.
- High quality, precision tools.

Multi-solution

- Tips of 3 different materials: brass, aluminium and polyamide.
- Extensive range of sizes.

Comfort and safety


- Exclusive sheathed, shock-absorbing handle.
- Slide-action for an increased shock-absorbency.
- Positive grip.

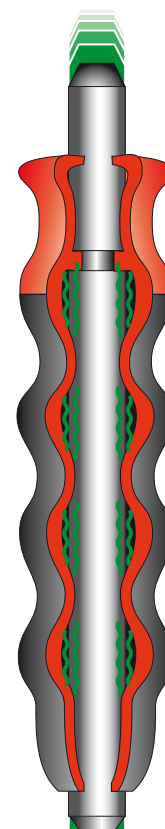


217.GJ1 Drifts set - 3 materials: Brass-Polyamide-Aluminum



- Capacity Ø 10 to 20 mm.
- Sets of 19 pieces comprising:
 - 1 anti-vibration sheathed grip 217.G16.
 - 5 aluminum drift punch tips Ø 10, 12, 14, 16, 18 mm; useful length: 60 mm.
 - 3 brass tips Ø 12, 16, 20 mm; useful length: 40 mm.
 - 3 polyamide tips Ø 12, 16, 20 mm; useful length: 40 mm.
 - one extension useful length 100 mm.
 - 3 bits for extension: brass Ø 12, 16, 18 mm; useful length: 20 mm.
 - 3 bits for extension: polyamide Ø 12, 16, 18 mm; useful length: 20 mm.
- Packaged in plastic case 265 x 230 x 50.
- Weight: 1.350 kg.



Extension

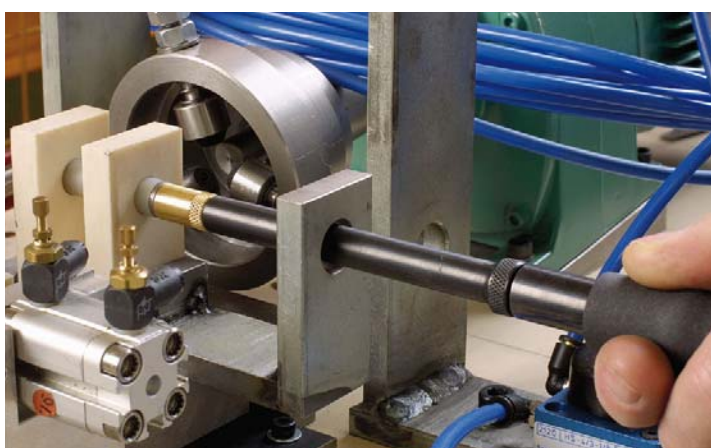

- M8 threaded bit holder extension.

| Icon | d [mm] | L [mm] | ΔΔ [kg] |
|---------|--------|--------|---------|
| 217.R12 | 12 | 125 | 0,105 |

Sheathed series

SHEATHED SERIES - A STEP FORWARD

NEW ULTRA-COMFORTABLE ANTI-ROLL SHEATH

Ergonomic

- Shock-absorbing.
- Elastic sheath. Partly free-sliding sheath.
- More stable, more positive grip.
- Protects the hand.

Safe


- Choice of best steels.
- Very precise heat treatment with different harnesses.
- DIN 7255.
- FACOM specifications.
- Better shock absorbance and elasticity to avoid the risk of breakage.

Precise and Powerful

- Comfortable grip ensures an accurately aimed blow.
- Stability of tool ensures a more powerful blow.




249G - Sheathed drift punches

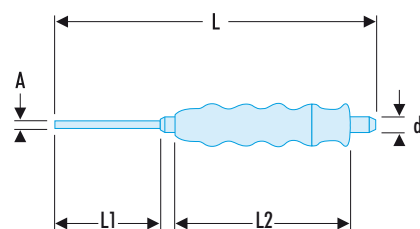

- Long shank.
- Head hardened to 43 HRc.
- Shank hardened to 58 HRc.

| ➤ | A [mm] | d [mm] | L [mm] | L1 [mm] | L2 [mm] | ΔΔ [kg] |
|----------------|--------|--------|--------|---------|---------|---------|
| 249.G2 | 1,95 | 8 | 140 | 35 | 105 | 0,088 |
| 249.G3 | 2,95 | 8 | 150 | 45 | 105 | 0,090 |
| 249.G4 | 3,95 | 10 | 190 | 60 | 105 | 0,094 |
| 249.G5 | 4,95 | 10 | 200 | 70 | 105 | 0,098 |
| 249.G6 | 5,90 | 12 | 210 | 80 | 105 | 0,142 |
| 249.G8 | 7,90 | 12 | 216 | 86 | 105 | 0,158 |
| 249.G10 | 9,80 | 14 | 230 | 100 | 105 | 0,181 |
| 249.G12 | 11,80 | 16 | 280 | 130 | 105 | 0,380 |
| 249.G14 | 13,80 | 18 | 290 | 140 | 105 | 0,490 |
| 249.G16 | 15,70 | 18 | 310 | 160 | 105 | 0,580 |


247G - Sheathed nail sets

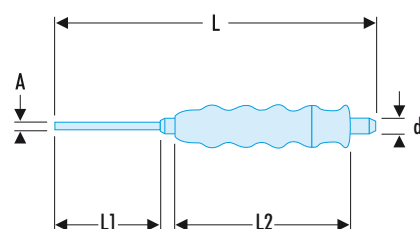

- Head hardened to 36 - 44 HRc.
- Tip hardened to 52 - 60 HRc.

| ➤ | A [mm] | d [mm] | L [mm] | L1 [mm] | L2 [mm] | ΔΔ [kg] |
|---------------|--------|--------|--------|---------|---------|---------|
| 247.G2 | 1,9 | 10 | 185 | 55 | 105 | 0,102 |
| 247.G3 | 2,9 | 10 | 185 | 55 | 105 | 0,106 |
| 247.G4 | 3,9 | 10 | 185 | 55 | 105 | 0,109 |
| 247.G5 | 4,9 | 10 | 185 | 55 | 105 | 0,112 |
| 247.G6 | 5,9 | 10 | 185 | 55 | 105 | 0,115 |
| 247.G8 | 7,8 | 12 | 185 | 55 | 105 | 0,173 |

255G - Sheathed centre punches

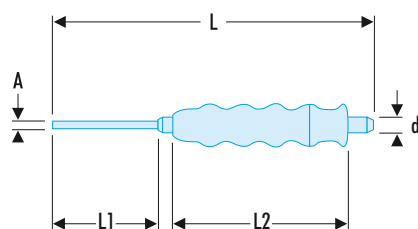

- Head hardened to 36 - 44 HRc.
- Tip hardened to 57 - 60 HRc.

| ➤ | A [mm] | d [mm] | L [mm] | L1 [mm] | L2 [mm] | ΔΔ [kg] |
|-----------------|--------|--------|--------|---------|---------|---------|
| 255.G2,5 | 2,5 | 10 | 185 | 55 | 105 | 0,104 |
| 255.G4 | 4 | 10 | 185 | 55 | 105 | 0,110 |
| 255.G6 | 6 | 10 | 185 | 55 | 105 | 0,116 |
| 255.G8 | 8 | 12 | 185 | 55 | 105 | 0,174 |
| 255.G10 | 10 | 14 | 185 | 55 | 105 | 0,210 |

Sets of sheathed impact tools



- Sets of punches and nail sets.


| ➤ | Content set |
|---------------------|--|
| 249.GJ5 | 249.G3 - G4 - G5 - G6 - G8 |
| 249.GJ7 | 249.G2 - G3 - G4 - G5 - G6 - G8 - G10 |
| 249.G247GJ12 | 249.G2 - G3 - G4 - G5 - G6 - G8 247.G2 - G3 - G4 - G5 - G6 - G8 |
| 249.GJ4 | 249.G10 - G12 - G14 - G16 |

MOD.CG Sheathed drift punches module




- Comprising:
 - 249.G 2 - 3 - 4 - 5 - 6 - 8 mm: 6 drift punches.
 - 247.G. 4 - 5 - 6 - 8 mm: 4 nail sets.
 - 255.G6: punch.
 - Heat-formed tray PL.334.
- Weight: 1.470 kg.

MODM.CG Sheathed drift punches foam module

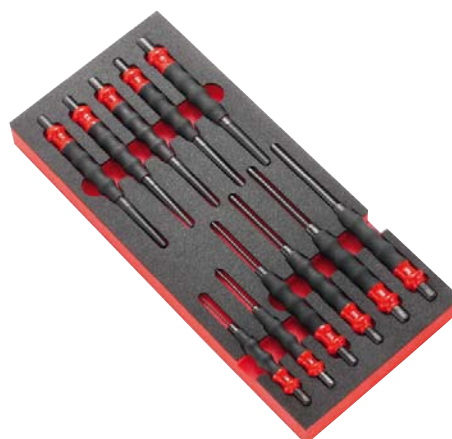

- Comprising:
 - 249.G 2 - 3 - 4 - 5 - 6 - 8 mm: 6 drift punches.
 - 247.G 4 - 5 - 6 - 8 mm: 4 nail sets.
 - 255.G6: punch accuracy 6 mm.
 - Foam tray PM.MODCG.
- Weight: 1.470 kg.

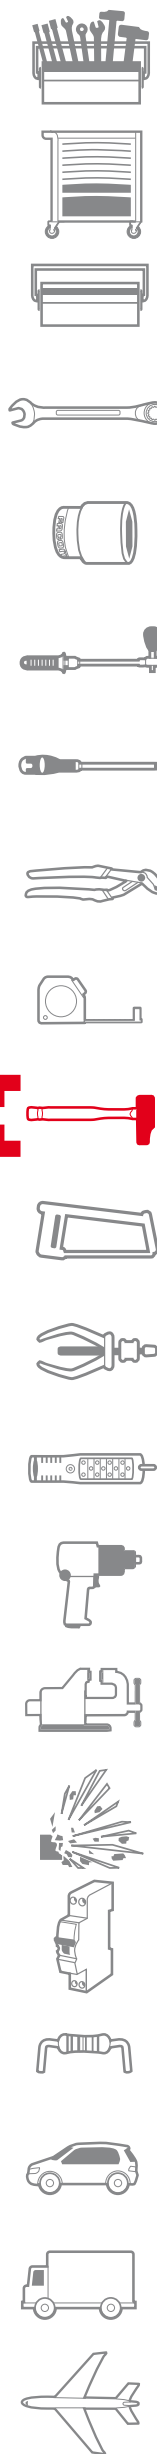


SHEATHED SERIES

IMPACT TOOL SAFETY:

- Check the condition of the tool before use.
- Do not use tools with traces of wear, mushrooming, scaling or cracks.
- Wear eye protection and gloves.




257.G Sheathed automatic centre punch

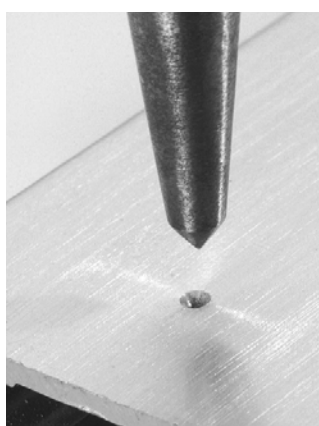

- Simply press the end to release spring impact.
 - Impact adjustable from 15 to 25 kg.
 - Ergonomic Facom handle.
 - Tip hardened to 57 - 60 HRc.
- Weight: 0.175 kg.


263.G - Sheathed chisels

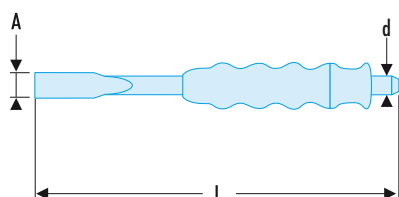

- Engineers chisels.
- Hardness:
 - Tip hardened to 57 - 60 HRc.
 - Head hardened to 36 - 44 HRc.
- Cutting angle: 60°.

| Facom | A [mm] | d [mm] | L [mm] | ΔΔ [kg] |
|----------------|--------|--------|--------|---------|
| 263.G19 | 15 | 12 | 190 | 0,165 |
| 263.G20 | 20 | 16 | 200 | 0,305 |
| 263.G22 | 25 | 18 | 220 | 0,415 |

Sheathed cape chisels

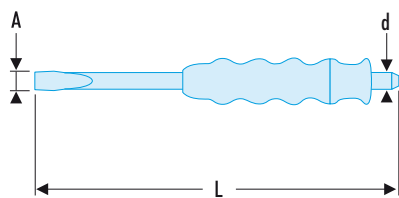

- Hardness:
 - Edge: 57-60 HRc.
 - Impact head: 36- 44 HRc.

| Facom | A [mm] | d [mm] | L [mm] | ΔΔ [kg] |
|----------------|--------|--------|--------|---------|
| 265.G18 | 10 | 10 | 180 | 0,110 |

263.GJ4 Set of sheathed tools



- Comprising:
 - 3 chisels: 263.G19 - 20 - 22.
 - 1 cape chisel: 265.G18.
- Supplied on cardboard box.
- Weight: 1.005 kg.


MOD.CG1 Drift punch - chisels - sheathed cape chisel module



- Comprising:
 - 249.G 12 - 14 - 16 mm: 3 sheathed drift punches.
 - 263G. 19 - 20 - 22: 3 sheathed chisels.
 - 265.G 18: 1 sheathed cape chisel.
 - Heat-formed tray PL.611.
- Weight: 3.000 kg.

Drifts

249 - Standard drift punches

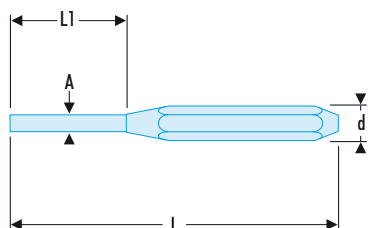


NF E 71-211, DIN 6450, ASME B107.410

- Hexagonal shank, high-strength steel tip, hardened to 53-58 HRc.
- Zinc-plated finish.

| ≡ | A [mm] | d [mm] | L [mm] | L1 [mm] | ΔΔ [kg] |
|--------|--------|--------|--------|---------|---------|
| 249.2 | 1,9 | 8 | 115 | 30 | 0,030 |
| 249.3 | 2,9 | 8 | 125 | 40 | 0,035 |
| 249.4 | 3,9 | 10 | 150 | 50 | 0,065 |
| 249.5 | 4,9 | 10 | 165 | 50 | 0,075 |
| 249.6 | 5,9 | 12 | 180 | 50 | 0,120 |
| 249.8 | 7,9 | 12 | 200 | 50 | 0,160 |
| 249.10 | 9,9 | 16 | 200 | 50 | 0,220 |


248 - One-piece drift punches

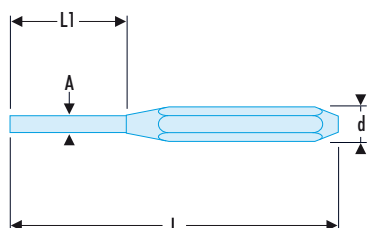


NF E 71-211

- Octagon-shaped, high-strength steel tip, hardened to 53-55 HRc.
- Zinc-plated finish.

| ≡ | A [mm] | d [mm] | L [mm] | L1 [mm] | ΔΔ [kg] |
|--------|--------|--------|--------|---------|---------|
| 248.2 | 1,9 | 8 | 150 | 30 | 0,045 |
| 248.3 | 2,9 | 8 | 150 | 40 | 0,050 |
| 248.4 | 3,9 | 10 | 150 | 50 | 0,055 |
| 248.5 | 4,9 | 10 | 150 | 50 | 0,065 |
| 248.6 | 5,9 | 10 | 150 | 50 | 0,070 |
| 248.8 | 7,9 | 12 | 150 | 50 | 0,100 |
| 248.10 | 9,9 | 12 | 150 | 50 | 0,120 |





246 - Drift punches for spring pins

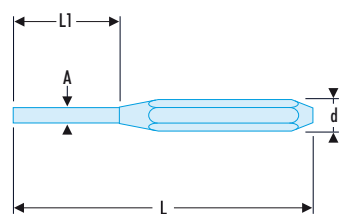

- Octagon-shaped body.
- Zinc-plated finish.
- Shouldered tip accurately centers into split pins.
- Hardened to 53 to 58 HRc guaranteeing perfect absorption of the shockwave.

| ⇒ | A [mm] | d [mm] | L [mm] | L1 [mm] | ΔΔ [kg] |
|--------------|--------|--------|--------|---------|---------|
| 246.2 | 1,9 | 8 | 150 | 30 | 0,045 |
| 246.3 | 2,9 | 8 | 150 | 40 | 0,045 |
| 246.4 | 3,9 | 10 | 150 | 50 | 0,060 |
| 246.5 | 4,9 | 10 | 150 | 50 | 0,060 |
| 246.6 | 5,9 | 10 | 150 | 50 | 0,070 |
| 246.8 | 7,9 | 12 | 150 | 50 | 0,100 |

251A - Precision sleeved drift punches

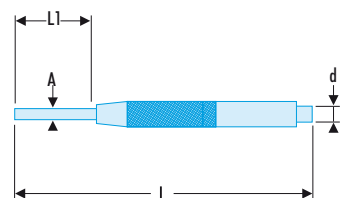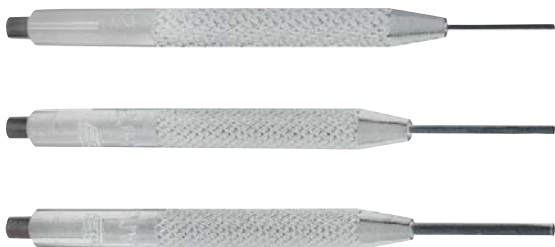


- The centre slides within a guide to prevent distortion, even in smaller sizes.
- Shank hardened to 52 to 57 HRc.
- Zinc-plated body, burnished body.

| ⇒ | A [mm] | d [mm] | L [mm] | L1 [mm] | ΔΔ [kg] |
|-----------------|--------|--------|--------|---------|---------|
| 251A.1 | 0,9 | 3 | 70 | 14 | 0,005 |
| 251A.1,5 | 1,4 | 3,5 | 83 | 21 | 0,010 |
| 251A.2 | 1,9 | 3,5 | 88 | 26 | 0,010 |
| 251A.2,5 | 2,4 | 4,5 | 93 | 22 | 0,018 |
| 251A.3 | 2,9 | 4,5 | 93 | 22 | 0,020 |
| 251A.3,5 | 3,4 | 5,5 | 96 | 25 | 0,025 |
| 251A.4 | 3,9 | 5,5 | 96 | 28 | 0,030 |
| 251A.5 | 4,9 | 7 | 107 | 33 | 0,045 |
| 251A.6 | 5,9 | 9 | 112 | 36 | 0,065 |

Nail sets

247 - Nail sets

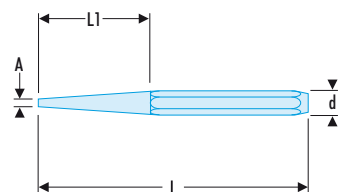

NF E 71-211, DIN 6458, ASME B107.410

- Octagon-shaped body.
- Shank hardened to 54 - 58 HRc.
- Zinc-plated finish.

| ⇒ | A [mm] | d [mm] | L [mm] | L1 [mm] | ΔΔ [kg] |
|--------------|--------|--------|--------|---------|---------|
| 247.2 | 2 | 10 | 120 | 40 | 0,060 |
| 247.3 | 3 | 10 | 120 | 40 | 0,060 |
| 247.4 | 4 | 10 | 120 | 40 | 0,060 |
| 247.5 | 5 | 10 | 120 | 40 | 0,065 |
| 247.6 | 6 | 10 | 120 | 40 | 0,070 |
| 247.8 | 8 | 12 | 120 | 40 | 0,100 |

DRIFT PUNCHES


IMPACT TOOL SAFETY:

- Check the condition of the tool before use.
- Do not use tools with traces of wear, mushrooming, scaling or cracks.
- Wear eye protection and gloves.



Drift punches

256 - Precision centre punches

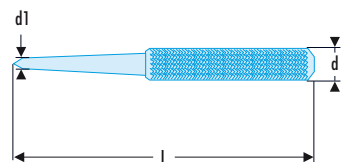


NF E 71-211, DIN 7250, ASME B107.410

- Chrome-vanadium steel forged, hardened to 52 to 58 HRC.
- Presentation: knurled body.
- Zinc-plated finish.

| ➤ | A [mm] | d [mm] | L [mm] | ΔΔ [kg] |
|----------------|--------|--------|--------|---------|
| 256.2,5 | 2,5 | 7 | 100 | 0,025 |
| 256.4 | 4 | 8 | 105 | 0,035 |
| 256.6 | 6 | 10 | 115 | 0,060 |
| 256.8 | 8 | 12 | 130 | 0,100 |
| 256.10 | 10 | 14 | 130 | 0,135 |

257A Automatic centre punch

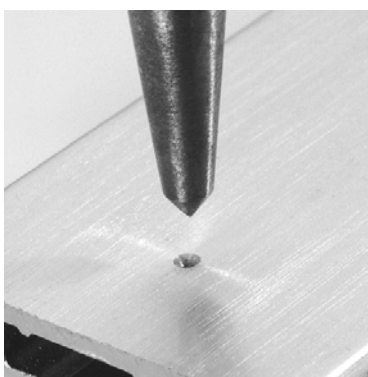


- Simply press the end to release spring impact.
 - Impact adjustable by turning the knurled head.
 - Acceptable load: 11 to 22 kg.
 - Presentation: chrome body, greased tip.
 - Length: 163 mm, body Ø 16 mm, shank Ø 7 mm.
- Weight: 0.135 kg.

Interchangeable tip: 257.07.

Spare tip: 257.10A.


Sets

Impact tools set

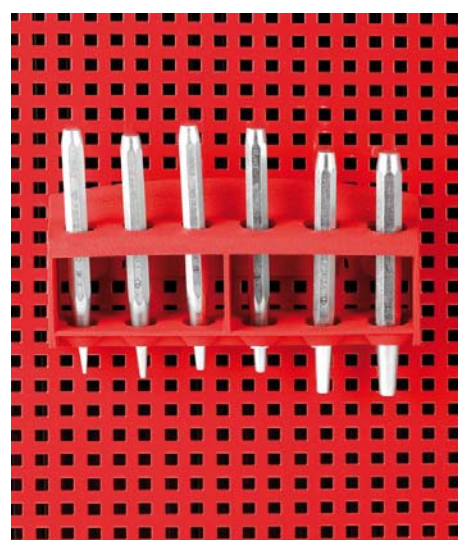


- JS Presentation on holder.
- JT Presentation as roll sets.
- For 249.JT7: roll set N.38A-7B.
- For 248.JT7: roll set N.38A-7B.
- For 251A.JT9: roll set N.38A-9C.
- For 247.265JT10: roll set N.38A-10B.

| ➤ | Dimension [mm] | Content set | Organiser for | ΔΔ [kg] |
|--------------------|------------------|---|---------------|---------|
| 249.JS7 | 120x195x45 | 249.2-3-4-5-6-8-10 | CKS.103 | 0,868 |
| 249.JT7 | 230x120 | 249.2-3-4-5-6-8-10 | N.38A-7B | 0,755 |
| 248.JS6 | 120x190x45 | 248.2-3-4-5-6-8 | CKS.103 | 0,588 |
| 248.JT7 | 265 x 120 | 248.2-3-4-5-6-8-10 | N.38A-7B | 0,695 |
| 246.JS6 | 120x190x45 | 246.2-3-4-5-6-8 | CKS.103 | 0,593 |
| 246.JT6 | 200x165 | 246.2-3-4-5-6-8 | N.38A-6C | 0,545 |
| 251A.JS9 | 120x115x45 | 251A.1-1.5-2-2.5-3-3.5-4-5-6 | CKS.103 | 0,354 |
| 251A.JT9 | 180 x 120 | 251A.1-1.5-2-2.5-3-3.5-4-5-6 | N.38A-9C | 0,260 |
| 247.249JS12 | 120x180x47 | 247.2-3-4-5-6-8 / 249.2-3-4-5-6-8 | CKS.103 | 1,076 |
| 247.265JT10 | 180x120 / 240x60 | 247.3-4-5 / 256.4-6 / 249.3-4-5 / 263.20 / 265.18 | N.38A-10B | 1,155 |

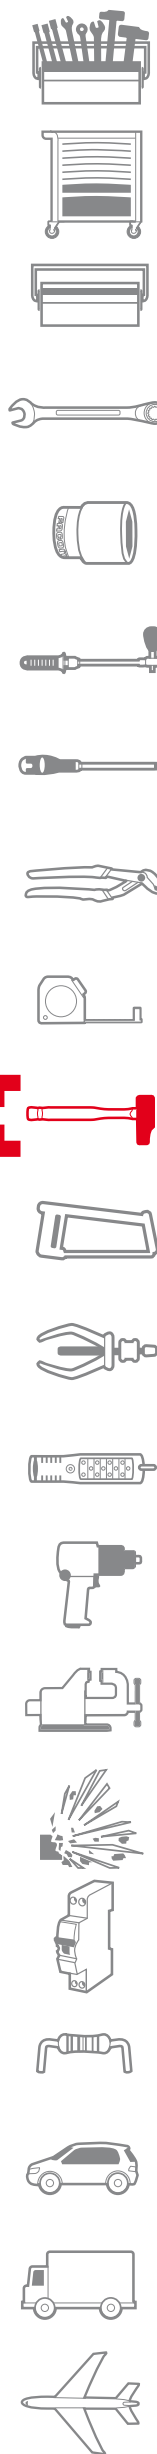

Flat chisels - Cape chisels

263 - Slim chisels

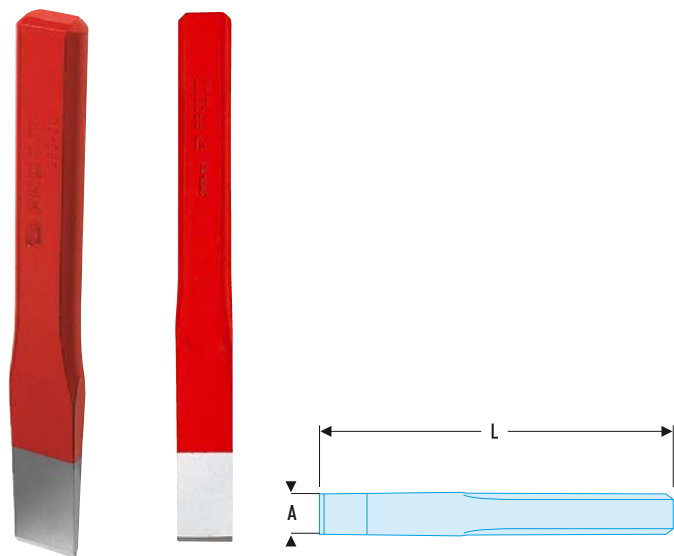

- Constant-profile cape chisel
- Chrome vanadium forged steel; differentiated heat treatment - edge 54 - 58 HRC - impact head 38 - 46 HRC to prevent head effect.
- Edge resharpening with grinder.
- Presentation: lacquered.

| ➤ | A [mm] | L [mm] | ΔΔ [kg] |
|---------------|--------|--------|---------|
| 263.15 | 21 | 150 | 0,200 |
| 263.18 | 21 | 180 | 0,250 |
| 263.20 | 24 | 200 | 0,350 |
| 263.22 | 24 | 220 | 0,380 |
| 263.25 | 27 | 250 | 0,500 |
| 263.30 | 27 | 300 | 0,610 |

263P - Chisels with guard



- Chisels with guard, diameter: 85 mm.
- Chrome vanadium forged steel; differentiated heat treatment: edge 54 - 58 HRC - impact head 38 - 46 HRC to prevent head effect.
- Edge resharpening with grinder.
- Presentation: lacquered.

| ➤ | A [mm] | L [mm] | ΔΔ [kg] |
|----------------|--------|--------|---------|
| 263.P25 | 27 | 250 | 0,610 |
| 263.P30 | 27 | 300 | 0,710 |


265 - Cape chisels



- Constant-profile cape chisels.
- Chrome vanadium forged steel; differentiated heat treatment: edge 54 - 58 HRC - impact head 38 - 46 HRC to prevent head effect.
- Edge resharpening with grinder.
- Presentation: lacquered.

| ➤ | A [mm] | L [mm] | ΔΔ [kg] |
|---------------|--------|--------|---------|
| 265.18 | 8 | 180 | 0,240 |
| 265.20 | 10 | 200 | 0,310 |
| 265.22 | 10 | 220 | 0,370 |

259 Slim-profile chisels

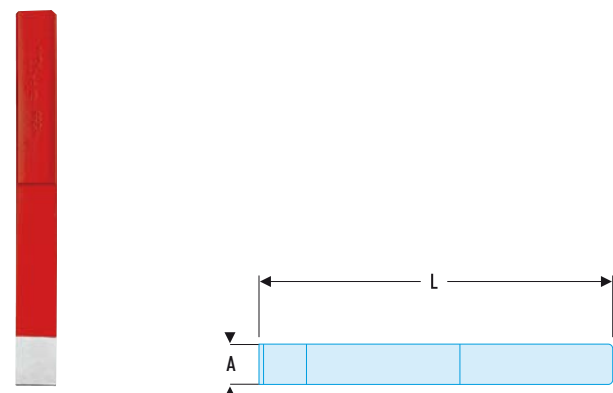

- Slim profile chisel.
 - Chrome vanadium forged steel, treated 57 HRC on edge and 40 HRC on impact head.
 - Blade width: 26 mm.
 - Length: 235 mm.
 - Presentation: lacquered.
- Weight: 240 g.

259.P Slim-profile chisel with guard



- Chisel with guard, diameter: 85 mm.
- Chrome vanadium forged steel, treated 57 HRc on edge and 40 HRc on impact head.
- Blade width: 26 mm.
- Length: 235 mm.
- Presentation: lacquered.
- Weight: 400 g.

260.P Wide chisel with guard




- Chisel with guard, diameter: 85 mm.
- Chrome vanadium forged steel and hardened to 57 HRc on edge.
- Edge resharpening with grinder.
- Head hardened to prevent head effect.
- Blade width: 60 mm.
- Length: 250 mm.
- Presentation: lacquered.
- Weight: 630 g.

Set of chisels and cape chisels on holder



| 🔪 | Dimension [mm] | Content set | Organiser for | ΔΔ [kg] |
|-------------------|----------------|---------------------------|---------------|---------|
| 263.265JS5 | 255 x 180 x 30 | 263.15-20-25 265.18-22 | CKS.81A | 1,850 |

262A - Ribbed chisels, round head

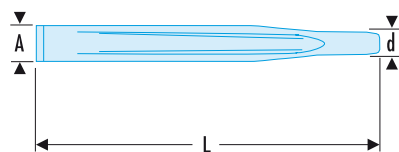


- Forged chisels with rounded edges for better handling.
- Cylinder-shaped head for safer impact.
- Cutting edge hardness: 57 to 59 HRc.
- Cutting edge angle: 60°.
- Presentation: zinc-plated finish.

| 🔪 | A [mm] | d [mm] | L [mm] | ΔΔ [kg] |
|----------------|--------|--------|--------|---------|
| 262A.15 | 21 | 16 | 150 | 0,170 |
| 262A.18 | 24 | 18 | 180 | 0,250 |
| 262A.20 | 26 | 18 | 200 | 0,340 |
| 262A.25 | 29 | 21 | 260 | 0,500 |

Set of ribbed chisels on holder



| 🔪 | Dimension [mm] | Content set | Organiser for | ΔΔ [kg] |
|-----------------|----------------|------------------|---------------|---------|
| 262A.JS4 | 180 x 30 x 250 | 262A.15-18-20-25 | CKS.80B | 1,440 |



志發

CHEE FATT

W : www.cheefatt.com

E : marketing@cheefatt.com

T : +65 6294 2066