

IDEMCO



BUILT TO BE
ABOVE

LOUISVILLE LADDER'S PRODUCT CATALOG





LOUISVILLE LADDER IS

BUILT TO
BE

ABOVE

Innovation is ingrained in our core, and we leverage it to build the products that set industry standards. From the tiniest accessory to our largest ladder, everything we produce is precision engineered for quality, durability, and productivity. Because only Louisville Ladder is laser-focused on you—Your end game, your bottom line, and your worksite. Through these tenants, Louisville Ladder has become the most trusted name at the top.

7765 National Turnpike, Unit 190
Louisville, KY 40214

www.louisvilleladder.com

PHONE (USA AND CANADA) 1.800.666.2811
PHONE 1.502.636.2811
FAX 1.800.274.4566



A REPUTATION IN RELIABILITY

For more than 75 years, Louisville Ladder has been known as the company to trust for all of your ladder and climbing equipment needs. Our long-standing track record of designing hard-working, easy-to-use ladders is what sets us apart, and our commitment to building reliable products is just as important to us now as it was on day one. That's why when you buy a Louisville Ladder, you can feel confident knowing that you are buying the best.

ADVANCING THE INDUSTRY

We know that as your job sites change, so can your needs. As a result, we are always thinking of new products and features to help your day-to-day tasks run more efficiently. Our unwavering commitment to advancing the safety and success of our industry means that we never stop thinking of ways to do things better. Whether it's adding a green top to our Cross Step ladder or designing a Tripod ladder that fits into odd spaces, our innovative ideas keep the industry moving forward.

WE TEAM UP

Our customers are our most important asset, and we pride ourselves on building genuine relationships with them from the get-go. Our teamwork-based approach allows us to treat each and every customer as an important partner, regardless of size, and our knowledgeable team of experts is always available to help. We realize that each customer is unique, as are their needs, and we treat them accordingly with customized solutions. It's a simple concept that we have never veered from, and one that keeps our customers returning time and time again.

ETHICS BEFORE EVERYTHING

When you've been a part of any industry for as long as we have, having a strong backbone and set of core values is a must. Our unmatched combination of proven expertise and longevity is something we take great pride in, but it's our honesty and authenticity that truly puts us above the rest. From operating as an environmentally conscious organization to working with a culturally diverse staff, we never lose sight of what is important to us as a company.



TABLE OF
CONTENTS

Ladder Selection Guide..... 6

Ladder Safety Standards7

Product Feature Glossary 8

Product Accessories10

STEPLADDERS | FIBERGLASS

FS1300HD STEP.....375lbs.....14

FS1400HD STEP..... 375lbs.....14

FS1500 STEP.....300lbs ... 15

L-3016 STEP.....300lbs 16

FS2000 STEP.....250lbs16

FS4000 STEP.....225lbs.....16

FM1400HD TWIN FRONT.....375lbs..... 17

FM1500 TWIN FRONT.....300lbs..... 17

PINNACLE

FXP1800HD PRO PLATFORM.....375lbs19

FXP1700 PRO PLATFORM.....300lbs19

2 IN 1 LEANING LADDERS

FCP1400HD CROSS PINNACLE.....375lbs.....21

FXS1400HD CROSS STEP.....375lbs.... 23

FXS1500 CROSS STEP.....300lbs... 23

STEPLADDERS | ALUMINUM

AS3000 STEP.....300lbs ... 25

AS2100 STEP.....250lbs ... 25

AS4000 STEP.....225lbs ... 26

AP5000 MOBILE PLATFORM.....300lbs ... 26

STEP STOOLS

FY8000 FIBERGLASS INDUSTRIAL STEP STAND.....375lbs 28

L-3042 FIBERGLASS MINI WORKING PLATFORM... 300lbs..... 28

AY8000 ALUMINUM INDUSTRIAL STEP STAND..... 375lbs 28

L-2011 ALUMINUM STOCKING STOOL300lbs.... 28

EXTENSION LADDERS | FIBERGLASS

FE4200HD EXTENSION.....375lbs ... 30

L-3022-PT EXTENSION.....300lbs.... 30

FE3200 EXTENSION..... 300lbs... 30

FE3100 SINGLE.....300lbs31

FE7200 EXTENSION.....300lbs 31

FE0600 EXTENSION..... 225lbs 31

FE8900 MANHOLE.....375lbs..... 32

FH1000 SHELF..... 300lbs..... 32

EXTENSION LADDERS | ALUMINUM

AE1200HD EXTENSION.....375lbs..... 34

AE2100 SINGLE.....300lbs 34

AE2200 EXTENSION.....300lbs 34

AE3200PG EXTENSION..... 250lbs 35

AE4200PG EXTENSION..... 225lbs 35

L-2321 EXTENSION.....200lbs 35

L-2324 EXTENSION.....200lbs 36

AE1600 3-SECTION EXTENSION..... 300lbs 36

SPECIALTY LADDERS

FXC1200 FIBERGLASS STEP TO STRAIGHT..... 375lbs..... 38

FT1500 FIBERGLASS TRIPOD.....300lbs 38

L-2032 ALUMINUM SAWHORSE.....300lbs 38

L-2098 ALUMINUM MULTIPURPOSE.....300lbs 39

WAREHOUSE/LADDERS/SCAFFOLDS/PLANKS

P SERIES SCAFFOLD PLANKS & STAGE PLATFORMS41

MODULAR GUARDRAIL SYSTEMS 42

L-P2 SERIES NESTABLE STAGES.....500lbs..... 43

LP-2921 SERIES TELESCOPING PLANK 43

PD9200 SCAF-A-DECK 43

LADDER RACKS SRA10 43

ATTIC LADDERS

ELITE ALUMINUM • AA2X10.....375lbs 45

ENERGY EFFICIENT ALUMINUM • AEE2X10.....375lbs 45

EVEREST ALUMINUM • AL2X8P.....350lbs 45

LOGOLOCK SYSTEM..... 46

C.L.I.M.B. Academy 47

Social Media 48

Warehouse Locations 49

HOW TO SELECT A LADDER

A GUIDE



STEPLADDER

The most popular style of ladder. Used from medium to low heights. Utilize pail shelves and tops to hold tools for the job.




TWIN FRONT LADDER

Allows two users to work on the same ladder simultaneously. Easily accomplish tasks that would be more difficult for a single person.



PLATFORM LADDER

Combines step ladder and warehouse ladder technology. The non-pinch platform provides a large standing area for work.

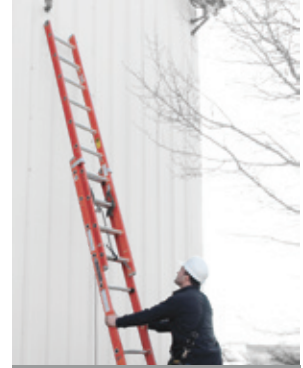

EXTENSION LADDER

The most versatile style of ladder, found in a variety of sizes. Most commonly used for higher elevations.

1. SELECT A TYPE

2. SELECT A LADDER MATERIAL

ALUMINUM

- Lightweight
- Long-lasting construction
- Resists corrosion
- Ideal for painting, roofing, and siding

DO NOT USE ALUMINUM LADDERS NEAR ELECTRICITY

FIBERGLASS

- Non-conductive when clean and dry
- Strong and durable
- Weather-resistant
- Great for heavy-duty construction

FIBERGLASS LADDERS ARE SAFE FOR WORKING AROUND ELECTRICITY

3. SELECT A LOAD CAPACITY

TYPE IAA
375 LBS. LOAD CAPACITY
INCLUDES WEIGHT OF USER PLUS MATERIALS

TYPE IAA: Professional use. Extra heavy duty. Capable of supporting 375 lbs.
USES: MRO and industrial construction.

TYPE IA
300 LBS. LOAD CAPACITY
INCLUDES WEIGHT OF USER PLUS MATERIALS

TYPE IA: Professional use. Extra heavy duty. Capable of supporting 300 lbs.
USES: Roofing, building maintenance, contracting and industrial construction.

TYPE I
250 LBS. LOAD CAPACITY
INCLUDES WEIGHT OF USER PLUS MATERIALS

TYPE I: Industrial use. Heavy duty. Capable of supporting 250 lbs.
USES: Building maintenance, general contracting and sheet rock.

TYPE II
225 LBS. LOAD CAPACITY
INCLUDES WEIGHT OF USER PLUS MATERIALS

TYPE II: Commercial use. Medium duty. Capable of supporting 225 lbs.
USES: Light commercial and general repair, painting and cleaning.

TYPE III
200 LBS. LOAD CAPACITY
INCLUDES WEIGHT OF USER PLUS MATERIALS

TYPE III: Household use. Light duty. Capable of supporting 200 lbs.
USES: Light cleaning and painting.

4. SELECT A HEIGHT

STEPLADDERS		
LADDER SIZE	APPROX. HIGHEST STANDING LEVEL	MAXIMUM REACH ^A
4'	1' 11"	8' 6"
5'	2' 10"	9' 5"
6'	3' 9"	10' 4"
7'	4' 9"	11' 4"
8'	5' 8"	12' 3"
10'	7' 7"	14' 2"
12'	9' 6"	16' 1"
14'	11' 5"	18'
16'	13' 4"	19' 11"
18'	15' 3"	21' 10"
20'	17' 2"	23' 8"

EXTENSION LADDERS				
LADDER SIZE	MAXIMUM EXTENDED LENGTH	MAX. REACH ^A	WORKING RANGE TO TOP SUPPORT*	MAXIMUM ACCESSIBLE ROOF HEIGHT RANGE*
16'	13'	15' 11"	7 ½' – 12 ½'	4 ½'–9 ½'
20'	17'	19' 10"	9 ½' – 16 ½'	6 ½'–13 ½'
24'	21'	23' 8"	11 ½' – 20'	8 ½'–17'
28'	25'	27' 7"	13 ½' – 24'	10 ½'–21'
32'	29'	31' 5"	15 ½' – 28'	12 ½'–25'
36'	32'	34' 4"	17 ½' – 31'	14'–28'
40'	35'	37' 3"	19' – 33 ½'	16'–30 ½'
44'	39'	41' 1"	21' – 37 ½'	18'–34 ½'
48'	43'	45'	23' – 41 ½'	20'–38 ½'
60'	48'	49' 10"	23' – 46 ½'	20'–43 ½'

▶ ^AAssumes 5' 7" person with 12" vertical reach
▶ *When set up at the proper 75 1/2° angle

HOW TO SAFELY USE OUR LADDERS

AT LOUISVILLE LADDER, all of our products are designed and constructed to meet or exceed applicable standards and requirements of the American National Standards Institute (ANSI), Occupational Safety and Health Administration (OSHA), and Canadian Standards Association (CSA). Please read the information on this page before using our products. Your safety is important to us.

ANSI

Meets or exceeds requirements
of American National Standards Institute

Louisville Ladder, Inc. manufactures products in compliance with the applicable safety codes of the American National Standards Institute (ANSI). There are a variety of ANSI safety codes depending on material and type of ladder. You can find a list of them in the figure below.

In addition, ANSI codes have established a Duty Rating which identifies the use for which a portable ladder is intended and the conditions under which the ladder can be used safely. An extensive series of tests and design requirements determines which Duty Rating label a particular ladder may receive. The total load supported includes the combined weight of the user, clothing, tools and any materials on the ladder. However, ladders must be used properly in order to support the intended load. See section "Select Load Capacity" on page 6 for more information on ANSI Duty Ratings.

ROLLING SCAFFOLDS:	ANSI A10.8
PLANKS & STAGES:	ANSI A10.8
WOOD LADDERS:	ANSI A14.1
STEP STOOLS:	ANSI A14.11
METAL LADDERS:	ANSI A14.2
FIBERGLASS LADDERS:	ANSI A14.5
STEEL LADDERS:	ANSI A14.7
ATTIC LADDERS:	ANSI A14.9



The OCCUPATIONAL SAFETY & HEALTH ADMINISTRATION (OSHA) regulates the adequacy of ladders and the work practices followed by employees using them in two sections: Portable ladders used in General industry (1910.23) and portable ladders used in Construction Industry (1926.1053). These sections specify the standards to which all portable ladders must be manufactured, care and placement of ladders in the workplace, and the safe use of ladders on the job. OSHA sets minimum national requirements with respect to the use of ladders in business and industry. However, many states have enacted their own regulations under the Occupational Safety & Health Act that establish more severe requirements. The more demanding state codes will supersede OSHA standards within their respective states. Therefore, users should check with their own state OSHA representatives.



Where applicable, product meets or exceeds CANADIAN STANDARDS INSTITUTE testing requirements.



DANGER: Metal ladders conduct electricity; do not use where contact may be made with live electrical circuits. Failure to read and follow instructions on the use of this product could result in serious personal injury or death.

SAFETY IS EVERYONE'S RESPONSIBILITY. Even a rigidly constructed ladder can be involved in an accident if the proper cautions are not taken in its use. Critical factors in safe use include reading all instructions and labels accompanying the ladder.

PROPER SELECTION

- Refer to product labels for Highest Standing Level and Working Load Capacity information.
- Select the ladder size to reach your work without climbing above the Highest Standing Level or overreaching.
- Weight of user, tools and materials shall not exceed Working Load Capacity. Ladders are available with duty ratings of 200, 225, 250, 300 and 375 lbs.
- Use a fiberglass or wood ladder if working with or around electricity.

INSPECTION BEFORE EACH USE

- Inspect before use. Do not use ladders with missing, loose, damaged, or non-operating parts.
- Make sure locks are in good working order.
- Replace heavily worn feet and illegible labels.
- Contact manufacturer for parts.
- Keep ladder and hinges clean and free of slippery substances.

CONSIDER BEFORE EACH USE

- Use ladder only as outlined in instructions. Ladders are designed for one person only unless otherwise noted (i.e. twin front ladders). Do not overload.
- Do not use ladders if you are in poor health, if taking any drugs or alcoholic beverages, or if physically handicapped.
- Use help in setting up ladder, if possible.
- Ladders are not to be set up on scaffolds.
- Metal ladders conduct electricity. Keep away from wires and electrical circuits.
- Consult manufacturer for use in chemical or other corrosive environments.
- Do not use ladders in high winds or during a storm.
- Secure ladder from excessive movement (e.g. tie off, block, brace, etc.)
- Pay close attention to what you are doing.

STEP LADDERS – Proper Set-up and Use

- Fully open ladder and lock spreader braces.

- Set all four feet on a firm level surface. Do not place on unstable, loose or slippery surfaces.
- Place ladder where access is not obstructed. Do not place in front of unlocked doors.
- Maintain a firm grip. Use both hands in climbing.
- Climb only front side of ladder. Face ladder when climbing and working.
- Do not step on the top step or top cap.
- Do not straddle front and back. Do not climb from the step ladder onto another ladder or surface.
- Do not over-reach. Keep body centered between the side rails. Get down and move ladder as needed.
- Avoid pushing or pulling off to side of ladder. Do not "walk" or "shift" ladder while on it.

SINGLE & EXTENSION LADDERS – Proper Setup and Use

- Retract ladder sections fully before lifting or moving.
- Raise and lower ladder from ground only; never from the top.
- Set ladder feet on firm, level surface and both rails against a firm support at the top.
- Make sure ladder does not lean to side. Ladder leveling devices are available for use on uneven ground.
- Do not place on unstable, loose, or slippery surfaces without securing from movement (e.g. tie off, block, brace, etc.)
- Place ladder where access is not obstructed. Do not place in front of unlocked doors.
- Extend fly section and secure runglocks. Make sure rope does not create a tripping hazard or interfere with activity near ladder.
- Do not overextend. A minimum overlap of sections is required as follows:
 - ladder size up to and including 32'-3" overlap
 - over 32' up to and including 36'-4" overlap
 - over 36' up to and including 48'-5" overlap
 - sizes over 48'-6" overlap
- Ladder must make a 75 1/2° angle with the ground. Obtain this angle as follows:
 - Place toes against bottom of ladder side rails
 - Stand erect

- Adjust angle so you can grasp lowest ladder section with palms on the outside of the rails, arms extended straight at shoulder level
- To confirm if ladder is at proper angle – Determine the distance along the rail between the top and bottom support points of the ladder. Divide this distance by 4. The result will be the horizontal distance between the top and bottom support points.
- When using ladder for access to roof, extend top 3 feet above roof edge. Tie or secure top from movement.
- Recommend tying bottom fly rung to adjacent base rung, or engaging Quickclatch™, when available.
- Face ladder when climbing and working.
- Maintain a firm grip. Use both hands in climbing.
- Do not over-reach. Keep body centered between the side rails. Get down and move ladder as needed.
- Do not climb above top support point. Do not climb from one ladder to another.
- Do not straddle or sit on rungs
- Avoid pushing or pulling off to side of ladder. Do not "walk" or "shift" ladder while on it.

PROPER CARE AND STORAGE

- Hang ladder on racks at intervals of 6' for support
- Never store materials on ladder
- Never drop or apply an impact load to ladder
- Securely support ladder in transit
- Never paint a wood ladder. Treat with wood preservative.
- Protect wood ladder from exposure to the elements, but allow good ventilation. Keep away from heat and moisture.
- For additional information see applicable ANSI Safety standards; A14.1-Wood; A14.2-Aluminum; A14.5-Fiberglass.

STEPLADDERS

PRODUCT FEATURES



Raptor Boot™

Polypropylene copolymer upper boot protects the rails of your fiberglass ladder. Thick, non-marring thermoplastic elastomer tread is bonded and mechanically fastened to the upper boot to create a secure, slip-resistant footing. Inside, RaptorBoot™ has a unique open design that allows for quick and easy visual inspection of the ladder's rail.



Raptor Top™

Raptor Top™ is a versatile and durable ladder top designed to increase your productivity. It is multifunctional and includes a hardware tray, magnet tray, drill and tool slots, paint bucket holder, and pipe or 2x4-holder. The curved, ergonomic front surface of the Raptor Top™ gives you more leg room for maximum comfort. New heat transfer top with load rating.



SHOX™

SHOX™ is a side rail impact absorption system that reduces damage to the lowest, first step of your ladder. This helps prolong the life of the ladder.

Pair SHOX™ with our RaptorBoot™ rail protection feature for total security and defense against wear and tear from normal use.




"V" SHAPED ProTop™

The "V" shaped ProTop™ allows you to lean the ladder into corners, walls and poles. The integrated bumper protects the work surfaces and the top provides a place to put all the tools to get the job done.



Double-Rivet Step Construction

Each step is secured with six solid, large-headed rivets for maximum strength. This feature gives your ladder 30% greater shear strength than solid aluminum rivets.



Center-Pull Spreader Brace

Unique Center-Pull Spreader Brace designed for one-hand operation. Brace is steel-plated for extra durability.



Full Metal Boot™

Extra-heavy-duty cast-aluminum shoes with a thick rubber tread. The rail is wrapped with reinforcement plates for durability. This is an exclusive Louisville Ladder design.



Pinch-Resistant Spreader Braces

A version of our heavy-duty spreader braces with steel plating and a double-rivet hinge to protect users from pinched fingers.



Heavy-Duty Gusset Bracing

All our gussets are created with heavy-duty steel. The gussets are added to angle back braces and steps for extra support.



Reinforcement Plates

Another level of security for spreader braces, these Reinforcement Plates add extra strength to your ladder.



Inside Spreader Braces

Spreader braces are mounted inside the fiberglass rails of your ladder to help protect braces from getting hooked or damaged in transit.



Slip-Resistant Rubber Feet

The new overmolding process tightly bonds the polymer tread and aluminum of the shoe, increasing durability and resistance of the bottom tread against wear, tear, and dragging.



Molded Pail Shelf

Our optional Molded Pail Shelf features a variety of tool slots, a drill slot, and can securely hold a paint tray or any shape of paint bucket.



Wide Back Braces

Vertically-mounted, U-shaped back braces provide maximum stability and discourage unsafe climbing. The bottom back brace provides heavy-duty strength to the ladder base.

EXTENSION LADDERS

PRODUCT FEATURES



MaxLock™ with QUICKLATCH®

Custom engineered from a patented, advanced molecular polymer, no other rung lock can handle more. MaxLock is the strongest, toughest, lightest rung lock ever made. It won't twist or bend even tested at 2000lb. Exclusively from Louisville Ladder. QuickLatch™ allows you to secure with one finger, the fly and base sections when extended.



ProGrip™

Get a grip on your task! ProGrip's™ slip-resistant tread is integrated onto your ladder caps. This protects your support surface from damage. ProGrip™ includes easy-carry hand grips for your convenience.



Rung-to-Rail Direct Connection

The ladder's rung passes through a punched hole in the rail, and is hydraulically crimped on both sides to form a tight, twist-resistant connection. The rung is permanently connected to and supported by the rail, giving your extension ladder rigidity and stability.




Aluminum Plate Connection Rungs

Tempered aluminum rungs are hydraulically double-crimped to an aluminum plate. Each plate is fastened to the ladder's rails with four aluminum rivets.



Cast-Aluminum Rail End Caps

Our rail ends (on 1200HD Series, and AE1660) feature extra-heavy-duty cast-aluminum caps to give your ladder the protection and durability needed for longevity.



D-Shaped Rungs

The flat top, D-shaped rung provides a greater standing area than round rungs. They are fully serrated to give you a slip-resistant standing surface.



Double Rope & Pulley

All aluminum double pulley systems come with a rot-resistant manila rope for excellent performance in any conditions.



Full I-Beam

Side rails are extra-heavy-duty 3" I-beam extrusions for maximum strength.



Full Metal Boot™

Extra-heavy-duty cast aluminum shoes with a thick rubber tread. The rail is wrapped with reinforcement plates for durability. This is an exclusive Louisville Ladder design.



Mar-Resistant Rail End Caps

All of our rail ends (on applicable products) feature impact-resistant caps that prevent work surfaces from marring and give you the protection and durability needed for longevity.




Modified I-Beam

Side rails are full 3" extrusions shaped into a modified I-beam for lightweight strength. Interlocking rails keep fly and base sections from separating.



Outside Slide Guides

Two extra-heavy-duty outside slide guides are secured to the top of your extension ladder's base section with four rivets per guide. Protects you from overextending fly section.



“V” SHAPED ProTop™

A multifunctional top designed to increase productivity. Can be leaned on walls, poles, and into corners. Featuring: corner grip, pole grip, integrated bumper, tool tether anchor attachment points and work tray; all compact and accessible in a spacious design.



Round Rungs

Round, tempered aluminum rungs are fully serrated for a slip-resistant surface. Each rung end is hydraulically double-crimped to your ladder's side rail.



Rubber Fly-Section Shoes

Your extension ladder's fly section (on AE2800) is equipped with solid rubber end-cap shoes so you can use the fly section separately as a single ladder.



Stacked Aluminum I-Beam Rail

Extra-heavy-duty slide guides are secured to the top of your extension ladder's base section with four rivets per guide. (AE2800 Series only)



Swivel Safety Shoes

Heavy-duty overmolding process tightly bonds shoe with polymer tread material, which reduces wear and tear from every day use while increasing the footprint. The shoe can be used with the tread down or in a spiked position.

EXTENSION LADDERS ACCESSORIES



Combination Pole Grip & Cable Hook

FIBERGLASS ONLY. A rigid steel-plated V-shaped pole grip covered with rubber tread, combined with cable hook assembly.

FACTORY		PK-E03A (16'-28')	APPROX. WEIGHT	3 LBS
E03	FIELD	PK-E03B (32'-40')	APPROX. WEIGHT	3 LBS
		PK-E03C (16'-40')	APPROX. WEIGHT	2.7 LBS



Rounded End Caps

FIBERGLASS ONLY. Covered in durable, rugged plastic, these round metal ends protect your support surface from damage.


FACTORY	FIELD	PK-E62 (16'-40')	APPROX. WEIGHT	1.9 LBS
E62				



Rigid Pole Grip

FIBERGLASS ONLY. 3/16" x 1" steel-plated bar formed into a "V" shape and covered with heavy rubber tread makes an ideal pole grip and can be added to ladders already in service.

FACTORY		PK-E04A (16'-28')	APPROX. WEIGHT	1.9 LBS
E04	FIELD	PK-E04B (32'-40')	APPROX. WEIGHT	1.7 LBS
		PK-E04C (16'-40')	APPROX. WEIGHT	1.5 LBS



"V" SHAPED ProTop™

FIBERGLASS ONLY. A multifunctional top designed to increase productivity. Can be leaned on walls, poles, and into corners. Featuring: corner grip, pole grip, integrated bumper, tool tether anchor attachment points and work tray; all compact and accessible in a spacious design.

FIELD	PK-1243	APPROX. WEIGHT	3 LBS
-------	---------	----------------	-------



Web Pole Grip

FIBERGLASS ONLY. Made of flexible high strength nylon webbing with a 5" section of corrugated rubber tread. Helps to hold top of ladder against poles, pipes or corners.

FACTORY	FIELD	PK-E05R (16'-40')	APPROX. WEIGHT	0.7 LBS
E05				



Side Mounted Double Pulley System

Thick rope and double pulley system for added ease of use.


FACTORY	FIELD	PK-1113 (16'-40')	APPROX. WEIGHT	4.3 LBS
E64				



Ladder Lash

FIBERGLASS ONLY. Lash for wrapping around objects up to 17" in diameter. Made of 2" Dacron webbing with forged steel snaps and a quick adjustment with clip.

FACTORY	FIELD	PK-E11R (16'-40')	APPROX. WEIGHT	1.1 LBS
E11				



Ladder Stabilizer (Fixed/Adjustable)

Fits extension and single ladders with rail up to 4" x 1 3/4". Holds ladder 12" from wall and spans 48" to clear most windows. Stabilizers attach with 2 U-bolts and feature replaceable extra-heavy-duty rubber tips. Adjustable Stabilizer has aluminum bracket with vertical adjustments hold ladder from 13" to 25" from wall and spans 48" to clear most windows.

MODEL NUMBER	FIXED: LP-2200-00	APPROX. WEIGHT	6 LBS
	ADJUSTABLE: LP-2210-00		



Wheel Spurs

FIBERGLASS ONLY. Wheel spurs are available as an alternative to our standard cast swivel safety shoe.

FACTORY **FIELD** PK-E30A (16'-28') **APPROX. WEIGHT** 0.9 LBS
E30



Ladder Jack (Short/Long Body)

Short body ladder jacks (1 pair) span 2 extension ladder rungs. Long body ladder jacks (1 pair) span 3 extension ladder rungs. Holds planks and stages up to 20" wide, features six pitch adjustments and folds for easy storage. Manufactured for use with Type IAA, IA, and I fiberglass and aluminum extension ladders.

MODEL NUMBER SHORT BODY: LP-2100-23 **APPROX. WEIGHT** 14 LBS
LONG BODY: LP-2100-13 **APPROX. WEIGHT** 16 LBS



Combination Spur & Shoe

FIBERGLASS ONLY. This accessory allows the use of either a spur or a shoe with thick rubber tread.

FACTORY ONLY
E38



Levelok® Ladder Stabilizer & Leveler

KEYLOK® QUICK CONNECT SYSTEM. The Levelok® is one of the easiest to use ladder levelers in the market. It can be installed on almost any fiberglass or aluminum extension ladder, and can be operated using only your foot – freeing your hands to hold the ladder.

FACTORY **FIELD** LP-2220-01 **APPROX. WEIGHT** 8 LBS
E59



Spurs & Shoes With Aluminum Sleeve

FIBERGLASS ONLY. This accessory allows the use of either a spur or a shoe with thick rubber tread. The NEW aluminum sleeve is 10 1/2" long.

FACTORY ONLY **APPROX. WEIGHT** 3.8 LBS
E63



Automatic-Adjusting Leveler

Leveler keeps ladder stabilized in perpendicular position on uneven terrain. Adjustable up to a 9" height differential.

FACTORY **FIELD** PR091006C-B-PY **APPROX. WEIGHT** 6.3 LBS
E34



ProGuards™

ProGuards™ fit most fiberglass and aluminum extension and single ladders. Protect your work surface with Pro-Guards™. patent #6,499,563 B1

MODEL NUMBER LP-5510-00 **APPROX. WEIGHT** 1.4 LBS



Pail Shelf Step Ladder Accessory

ONLY FOR STEP LADDERS. Fits all Louisville/Davidson brand step ladders. Detailed instructions and supplied hardware make installation easy.

MODEL NUMBER LP-2400-00 **APPROX. WEIGHT** 1.5 LBS




Pinnacle Gate

COMPATIBLE WITH FXP1800HD, FXP1700XL, FXP1700, FCP1400HD series. Our optional gate provides full contact on all 4 sides, permitting 360° work access.

FIELD LP-2807-80 **APPROX. WEIGHT** 5.75 LBS

	FE3200	FE7200	FE0600	FE4200HD	AE1200HD	AE2200	AE1600	AE4200
ACCESSORY #E03 COMBINATION POLE GRIP & CABLE HOOK	✓	✓	✓	✓				
ACCESSORY #E04 RIGID POLE GRIP	✓	✓	✓	✓				
ACCESSORY #E05 WEB POLE GRIP	✓	✓	✓	✓				
ACCESSORY #E11 LADDER LASH	✓	✓	✓	✓				
ACCESSORY #E30 WHEEL SPURS	✓	✓	✓	✓				
ACCESSORY #E38, #E63 COMBINATION SPUR & SHOE WITH ALUMINUM SLEEVE	✓	✓	✓	✓				
MODEL #5510-00 PROGUARDS™	✓	✓	✓	✓	✓	✓	✓	✓
ACCESSORY #E62 ROUNDED END CAPS	✓	✓	✓	✓				
ACCESSORY #PK1243 "V" SHAPED PROTOP™	✓	✓	✓					
ACCESSORY #1113 SIDE MOUNTED DOUBLE PULLEY SYSTEM	✓	✓	✓	✓				
MODEL #LP-2200-00, #LP-2210-00 LADDER STABILIZER FIXED AND ADJUSTABLE	✓	✓	✓	✓	✓	✓	✓	✓
MODEL #LP-2100-23 #LP-2100-13 LADDER JACK SHORT AND LONG BODY	✓	✓	✓	✓	✓	✓	✓	
MODEL #LP-2220-01 LEVELOK® LADDER STABILIZER & LEVELER	✓	✓	✓	✓	✓	✓		✓
ACCESSORY #E34 AUTOMATIC ADJUSTING LEVELER FACTORY MOUNT	✓	✓	✓	✓	✓	✓	✓	✓

► For availability, please contact Customer Service. Specify ladder size and model. To order factory-mount accessories, add the 3-digit accessory number and size.
EXAMPLE: FE3220-E05, 20' Fiberglass Extension Ladder with Web Pole Grip.

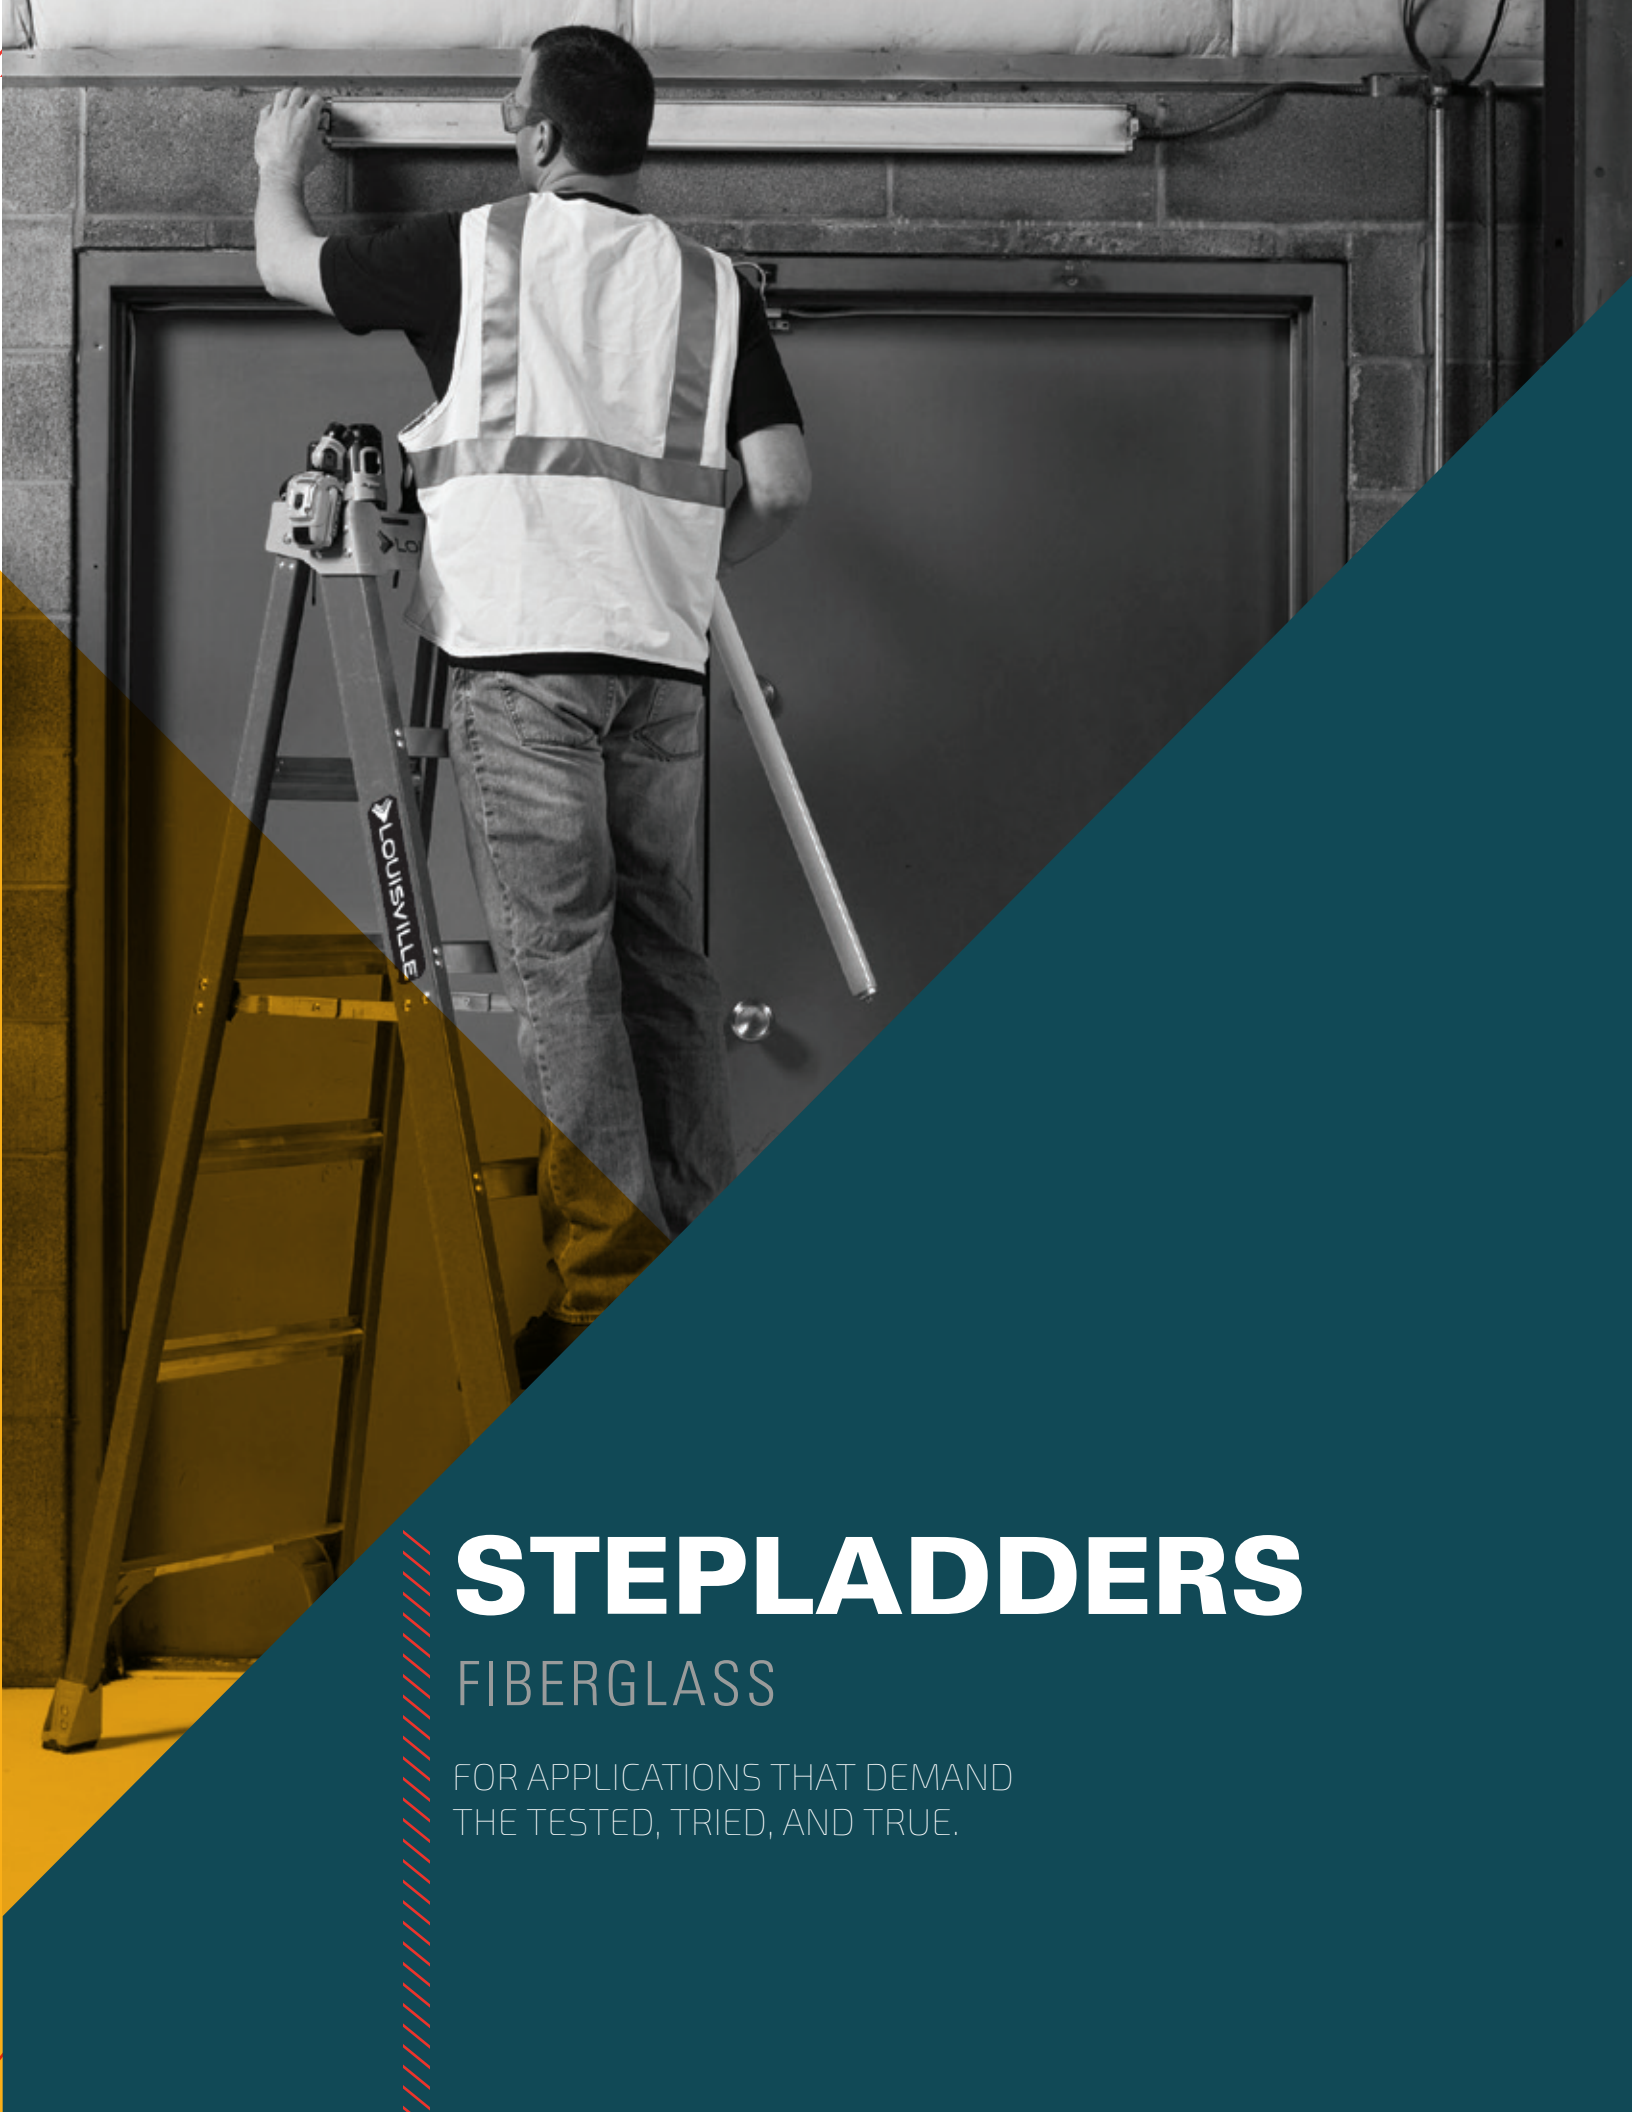

STEPLADDERS

FIBERGLASS

FOR APPLICATIONS THAT DEMAND
THE TESTED, TRIED, AND TRUE.

FS1306HD



SERIES
FS1300HD
FIBERGLASS STEPLADDER

TYPE IAA
375 LBS.
LOAD CAPACITY
INCLUDES WEIGHT OF USER PLUS MATERIALS



1. Heavy-gauge metal top with tool slots.
2. Inside spreader braces.
3. Heavy-duty gusset bracing.



4. **SHOX™**—Advanced impact absorption protects fiberglass rails against damage.
5. Full metal boot with thick rubber thread.

MODEL	LADDER SIZE	MAX. REACH*	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES
FS1304HD	4'	8' 6"	18 7/8"	29 1/8"	15	2.1'
FS1306HD	6'	10' 4"	21 3/4"	41"	21	3.5'
FS1308HD	8'	12' 3"	24 3/4"	52 13/16"	28	5.2'
FS1310HD	10'	14' 2"	27 7/8"	64 11/16"	40	7.1'
FS1312HD	12'	16' 1"	31"	76 1/2"	51	9.2'

➤ *Assumes 5' 7" person with 12" vertical reach

FS1406HD



SERIES
FS1400HD
FIBERGLASS STEPLADDER

TYPE IAA
375 LBS.
LOAD CAPACITY
INCLUDES WEIGHT OF USER PLUS MATERIALS



1. **Raptor Top™**—multiple tool slots & magnet for increased productivity.
2. Inside spreader braces.
3. Wide back braces.



4. Riveted step construction with gussets.
5. **SHOX™**—Advanced impact absorption protects fiberglass rails against damage.
6. **Raptor Boot™**—Heavy duty boot protects fiberglass.

MODEL	LADDER SIZE	MAX. REACH*	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES
FS1404HD	4'	8' 6"	19 1/4"	28"	15	3.7'
FS1406HD	6'	10' 5"	22 1/8"	39 3/8"	21	6.4'
FS1408HD	8'	12' 3"	25 1/8"	52 1/8"	26	9.5'
FS1410HD	10'	14' 2"	28 3/4"	65"	42	13.6'
FS1412HD	12'	16' 1"	32 3/8"	76 1/8"	53	21.8'

➤ *Assumes 5' 7" person with 12" vertical reach

FS1506



TYPE IA
300 LBS.
 LOAD CAPACITY
INCLUDES WEIGHT OF USER PLUS MATERIALS

ANSI
AMERICAN NATIONAL STANDARD
 A14.5



OSHA
RECOMMENDED

SERIES
FS1500
 FIBERGLASS STEPLADDER



1. **Raptor Top™** — multiple tool slots and magnet for increased productivity



2. Wide back braces



3. Inside spreader braces



4. Double-rivet step construction



5. **SHOX™** — Advanced impact absorption protects fiberglass rails against damage



6. **Raptor Boot™** — Heavy duty boot protects fiberglass

ALSO AVAILABLE
FS1502
 FOLDING STEP STOOL



MODEL	LADDER SIZE	MAX. REACH*	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES
FS1502**	2'	8' 9"	17"	18 1/8"	8	2'
FS1504	4'	8' 6"	19 3/8"	28 7/8"	14	3.9'
FS1506	6'	10' 5"	22 3/8"	40 1/2"	20	6.7'
FS1508	8'	12' 3"	25 3/8"	53"	26	10'
FS1510	10'	14' 2"	28 1/2"	65"	38	14.1'
FS1512	12'	16' 1"	31 3/8"	77"	46	18.5'

➤ *Assumes 5' 7" person with 12" vertical reach
 ➤ **FS1502 is a folding step stool and is not equipped with the RaptorTop or molded pail shelf
 ➤ Add suffix -S51 to model number for optional molded Pail Shelf. Not available on model FS1502.

L-3016-06



SERIES
L-3016
FIBERGLASS STEPLADDER

TYPE IA
300 LBS.
LOAD CAPACITY
INCLUDES WEIGHT OF USER PLUS MATERIALS



1. ProTop™— multiple tool slots for increased productivity.
2. Slip-resistant boot.



3. Inside spreader braces.
4. Heavy-duty gusset bracing.

MODEL	LADDER SIZE	MAX. REACH*	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES
L-3016-04	4'	8' 6"	19"	28 1/4"	14	1.8'
L-3016-06	6'	10' 4"	21 1/4"	40 3/8"	18	5.2'
L-3016-08	8'	12' 3"	24 3/4"	52 1/2"	26	8'
L-3016-10	10'	14' 2"	28"	64 3/8"	36	11.3'
L-3016-12	12'	16' 1"	31"	77"	47	15'

- *Assumes 5' 7" person with 12" vertical reach
- Add suffix -S51 to model number for optional molded Pail Shelf. Available on all sizes and most step models

FS2006



SERIES
FS2000
FIBERGLASS STEPLADDER

TYPE I
250 LBS.
LOAD CAPACITY
INCLUDES WEIGHT OF USER PLUS MATERIALS



1. ProTop™— multiple tool slots for increased productivity.
2. Pinch-resistant spreader braces.
3. SHOX™—Advanced impact absorption protects fiberglass rails against damage.



4. Slip-resistant boot.
5. Molded pail shelf (OPTIONAL).

MODEL	LADDER SIZE	MAX. REACH*	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES
FS2004	4'	8' 6"	19 1/8"	28 1/4"	12	4'
FS2005	5'	9' 5"	20 5/8"	34 1/8"	14	5.4'
FS2006	6'	10' 4"	22 1/8"	40 1/8"	17	6.9'
FS2008	8'	12' 3"	25 1/8"	52"	23	10.5'

- *Assumes 5' 7" person with 12" vertical reach
- **FS2002 is a folding step stool and is not equipped with the ProTop or molded pail shelf
- Add suffix -S51 to model number for optional molded Pail Shelf. Not available on model FS2002.

FS4006



SERIES
FS4000
FIBERGLASS STEPLADDER

TYPE II
225 LBS.
LOAD CAPACITY
INCLUDES WEIGHT OF USER PLUS MATERIALS



1. ProTop™— multiple tool slots for increased productivity.*
2. Pinch-resistant spreader braces.
3. SHOX™—Advanced impact absorption protects fiberglass rails against damage.



4. Slip-resistant boot.
5. Molded pail shelf (OPTIONAL).

MODEL	LADDER SIZE	MAX. REACH*	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES
FS4004	4'	8' 6"	19 1/8"	28 1/4"	11	3.3'
FS4005	5'	9' 5"	20 5/8"	34 1/8"	13	4.5'
FS4006	6'	10' 4"	22 1/8"	40 1/8"	16	5.8'
FS4008	8'	12' 3"	25 1/8"	52"	21	8.7'

- *Assumes 5' 7" person with 12" vertical reach
- *ProTop does not have magnet feature on FS4000 series
- Add suffix -S51 to model number to order optional Molded Pail Shelf

FM1406HD



SERIES
FM1400HD
FIBERGLASS TWIN FRONT LADDER



1. Heavy-gauge metal top.
2. Inside spreader braces.
3. Heavy-duty gusset bracing.



TYPE IAA
375 LBS.
LOAD CAPACITY
INCLUDES WEIGHT OF USER PLUS MATERIALS

4. **SHOX™**—Advanced impact absorption protects fiberglass rails against damage.
5. **Raptor Boot™**—Heavy duty boot protects fiberglass.

MODEL	LADDER SIZE	MAX. REACH*	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES
FM1404HD	4'	8' 6"	19 3/8"	38 3/8"	19	4.7'
FM1406HD	6'	10' 4"	22 1/2"	54"	26	8.3'
FM1408HD	8'	12' 3"	25 3/8"	68 1/2"	38	12.3'
FM1410HD	10'	14' 2"	28 3/8"	83 1/8"	54	17.1'
FM1412HD	12'	16' 1"	31 1/2"	97 13/16"	75	23.1'
FM1414HD**	14'	18'	34 1/2"	113 3/8"	84	29.1'
FM1416HD**	16'	19' 11"	37 3/8"	129"	100	36'

- ▶ *Assumes 5' 7" person with 12" vertical reach
- ▶ Both sides of twin front ladders can be used simultaneously by one person plus materials. The duty rating is per side.
- ▶ **14'-16' duty rating exceeds OSHA standards.

FM1506



SERIES
FM1500
FIBERGLASS TWIN FRONT LADDER



1. Heavy-gauge steel hinges.
2. Inside spreader braces.
3. Double-rivet step construction.



TYPE IA
300 LBS.
LOAD CAPACITY
INCLUDES WEIGHT OF USER PLUS MATERIALS

4. **SHOX™**—Advanced impact absorption protects fiberglass rails against damage.
5. **Raptor Boot™**—Heavy duty boot protects fiberglass.

MODEL	LADDER SIZE	MAX. REACH	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES
FM1503	3'	7' 6"	17 3/4"	31"	15	3.2'
FM1504	4'	8' 6"	18 3/4"	37 7/8"	19	4.5'
FM1506	6'	10' 5"	22 1/2"	53 3/4"	26	8.2'
FM1508	8'	12' 3"	25 1/4"	68 3/8"	35	12.2'
FM1510	10'	14' 2"	27 3/4"	83 7/8"	44	16.8'

- ▶ *Assumes 5' 7" person with 12" vertical reach
- ▶ Both sides of twin front ladders can be used simultaneously by one person plus materials. The duty rating is per side.



PINNACLE

GET MORE ROOM TO GET MORE DONE.



SERIES
FXP1800HD
FIBERGLASS PINNACLE PLATFORM
LADDER



1. **ProTop™** — multiple tool slots for increased productivity.
2. Larger platform for added comfort.
3. **SHOX™**—Advanced impact absorption protects fiberglass rails against damage.
4. **Raptor Boot™** — Heavy duty boot protects fiberglass.

TYPE IAA
375 LBS.
LOAD CAPACITY
INCLUDES WEIGHT OF USER PLUS MATERIALS

19% LARGER PLATFORM
vs. other leading ladders.

WAIST-HIGH HANDRAIL
at tool belt height for added comfort.

WORK FACING MULTIPLE DIRECTIONS
It is not recommended that worker face ladder steps while on platform.

HEAT TRANSFER TOP
No more OSHA fines due to missing duty rating labels. Scratch and UV resistant.

MODEL	HEIGHT TO PLATFORM	STEP DEPTH	MAX. REACH*	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES
FXP1802HD	1' 11"	3"	8' 6"	21 7/8"	36"	20	8'
FXP1803HD	2' 10"	3"	9' 5"	23 3/8"	42"	22	10.3'
FXP1804HD	3' 9"	3"	10' 5"	24 7/8"	48"	25	12.8'
FXP1806HD	5' 8"	3"	12' 3"	27 7/8"	61 1/2"	33	18.3'
FXP1808HD	7' 7"	3"	14' 2"	30 7/8"	74"	50	24.7'
FXP1810HD**	9' 6"	3"	16' 1"	33 7/8"	88"	62	31.9'
FXP1812HD**	11' 5"	3"	18'	36 7/8"	101 1/2"	75	40.1'

▶ *Assumes 5' 7" person with 12" vertical reach
▶ **Special duty: manufacturer tested to 375 lbs.



SERIES
FXP1700
FIBERGLASS PINNACLE PLATFORM
LADDER



1. **ProTop™** — multiple tool slots for increased productivity.
2. Larger platform for added comfort.
3. **SHOX™**—Advanced impact absorption protects fiberglass rails against damage.
4. **Raptor Boot™** — Heavy duty boot protects fiberglass.

TYPE IA
300 LBS.
LOAD CAPACITY
INCLUDES WEIGHT OF USER PLUS MATERIALS

WIDE PLATFORM
Larger than other ladders in its class.

PERFECT TOOL BELT HEIGHT
Puts every tool on your tool belt within reach.

WORK FACING MULTIPLE DIRECTIONS
It is not recommended that worker face ladder steps while on platform.

HEAT TRANSFER TOP
No more OSHA fines due to missing duty rating labels. Scratch and UV resistant.

MODEL	HEIGHT TO PLATFORM	STEP DEPTH	MAX. REACH*	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES
FXP1702	1' 11"	3"	8' 6"	21 3/4"	33"	18	7.1'
FXP1703	2' 10"	3"	9' 5"	23 1/4"	39"	21	9.3'
FXP1704	3' 9"	3"	10' 5"	24 3/4"	45"	24	11.7'
FXP1706	5' 8"	3"	12' 3"	27 3/4"	57"	31	18.3'
FXP1708	7' 7"	3"	14' 2"	30 3/4"	69"	48	17'
FXP1710	9' 6"	3"	16' 1"	33 3/4"	81"	60	23.3'
FXP1712	11' 5"	3"	18'	36 3/4"	92"	73	38.4'

▶ *Assumes 5' 7" person with 12" vertical reach



2-IN-1
DESIGN

for Standing and Leaning



CROSS PINNACLE

CONTINUED INNOVATION WITH SAFETY IN MIND



FCP1404HD



TYPE IAA
375 LBS.
 LOAD CAPACITY
INCLUDES WEIGHT OF USER PLUS MATERIALS



SERIES
FCP1400HD
 FIBERGLASS
 PLATFORM TO LEANING LADDER



1. Leaning position allows ladder to be leaned onto & into walls, on structures, & poles.



2. **ProTop™** - Includes multiple tool slots, and two tool tether anchor attachment points for increased productivity.



3. Larger Platform - Spacious platform allows for more secure, comfortable movement. Overflow slots keep the surface clear.



4. Waist-High Handrail - 36" heavy-duty handrail runs from platform to peak providing a secure 3-sided barrier.



5. **Raptor Boot™** - Heavy-duty boot protects fiberglass.



6. **SHOX™** - Advanced impact absorption protects fiberglass rails against damage.

MODEL	PLATFORM HEIGHT	BOTTOM WIDTH (IN)	APPROX. SPREAD (IN)	APPROX. WEIGHT (LBS)	APPROX. CUBES (FT)	HIGHEST STANDING LEVEL (IN)	MAX. REACH*
FCP1402HD	1' 11"	21 ¹⁵ / ₁₆	30 ¹ / ₄	25	8.8	1' 11"	8' 6"
FCP1403HD	2' 10"	23 ¹⁵ / ₁₆	35 ¹ / ₂	30	11.4	2' 10"	9' 5"
FCP1404HD	3' 10"	25 ⁷ / ₁₆	41 ¹ / ₄	34	14.1	3' 10"	10' 5"
FCP1406HD	5' 8"	28 ³ / ₈	54	43	20.1	5' 8"	12' 3"
FCP1408HD	7' 7"	31 ⁵ / ₈	66	52	27.2	7' 7"	14' 2"

*Assumes 5' 7" person with 12" vertical reach



2-IN-1 DESIGN

for Standing and Leaning



CROSS STEP

AN INNOVATION THAT'S UNRIVALED FROM THE TOP DOWN.

FXS1406HD



SERIES
FXS1400HD

FIBERGLASS STEP TO
LEANING LADDER

TYPE IAA
375 LBS.
LOAD CAPACITY
INCLUDES WEIGHT OF USER PLUS MATERIALS




1. Leaning position allows ladder to be leaned onto & into walls, on structures, & poles.




2. **ProTop™** - with "V" shape to fit into corners, includes magnet.



3. **Raptor Boot™** - Heavy duty boot protects fiberglass.



4. Locking latch to secure rear section.



5. **Shox™** - Advanced impact absorption protects fiberglass rails against damage.



6. Heavy duty gussets under every step for rigidity & stability.

MODEL	LADDER SIZE	BOTTOM WIDTH (IN)	APPROX. SPREAD (IN)	APPROX. WEIGHT (LBS)	APPROX. CUBES (FT)	SHEFLADDER		STEPLADDER	
						HIGHEST STANDING LEVEL (IN)	MAX. REACH*	HIGHEST STANDING LEVEL (IN)	MAX. REACH*
FXS1404HD	4'	20 1/4"	24"	16	4.0	11"	7' 6"	1' 11"	8' 6"
FXS1406HD	6'	23 1/4"	36"	23	6.8	2' 10"	9' 5"	3' 9"	10' 5"
FXS1408HD	8'	26 1/4"	48"	31	10.1	4' 9"	11' 4"	5' 8"	12' 3"
FXS1410HD	10'	29 1/4"	60"	39	14.0	6' 8"	13' 3"	7' 7"	14' 2"
FXS1412HD	12'	32 3/8"	71"	48	18.5	8' 6"	15' 1"	9' 6"	16' 1"

► *Assumes 5' 7" person with 12" vertical reach

FXS1506



SERIES
FXS1500

FIBERGLASS STEP TO
LEANING LADDER

TYPE IA
300 LBS.
LOAD CAPACITY
INCLUDES WEIGHT OF USER PLUS MATERIALS



1. Leaning position allows ladder to be leaned onto & into walls, on structures, & poles.



2. **ProTop™** - with "V" shape to fit into corners, includes magnet.




3. **Raptor Boot™** - Heavy duty boot protects fiberglass.



4. Locking latch to secure rear section.




5. **Shox™** - Advanced impact absorption protects fiberglass rails against damage.



6. Double rivet & flared construction for rigidity & stability.

MODEL	LADDER SIZE	BOTTOM WIDTH (IN)	APPROX. SPREAD (IN)	APPROX. WEIGHT (LBS)	APPROX. CUBES (FT)	SHEFLADDER		STEPLADDER	
						HIGHEST STANDING LEVEL (IN)	MAX. REACH*	HIGHEST STANDING LEVEL (IN)	MAX. REACH*
FXS1504	4'	20 1/4"	24"	15	4.0	11"	7' 6"	1' 11"	8' 6"
FXS1506	6'	23 1/4"	36"	21	6.8	2' 10"	9' 5"	3' 9"	10' 5"
FXS1508	8'	26 1/4"	48"	28	10.1	4' 9"	11' 4"	5' 8"	12' 3"
FXS1510	10'	29 1/4"	60"	39	14.0	6' 8"	13' 3"	7' 7"	14' 2"
FXS1512	12'	32 3/8"	71"	48	18.5	8' 6"	15' 1"	9' 6"	16' 1"

► *Assumes 5' 7" person with 12" vertical reach

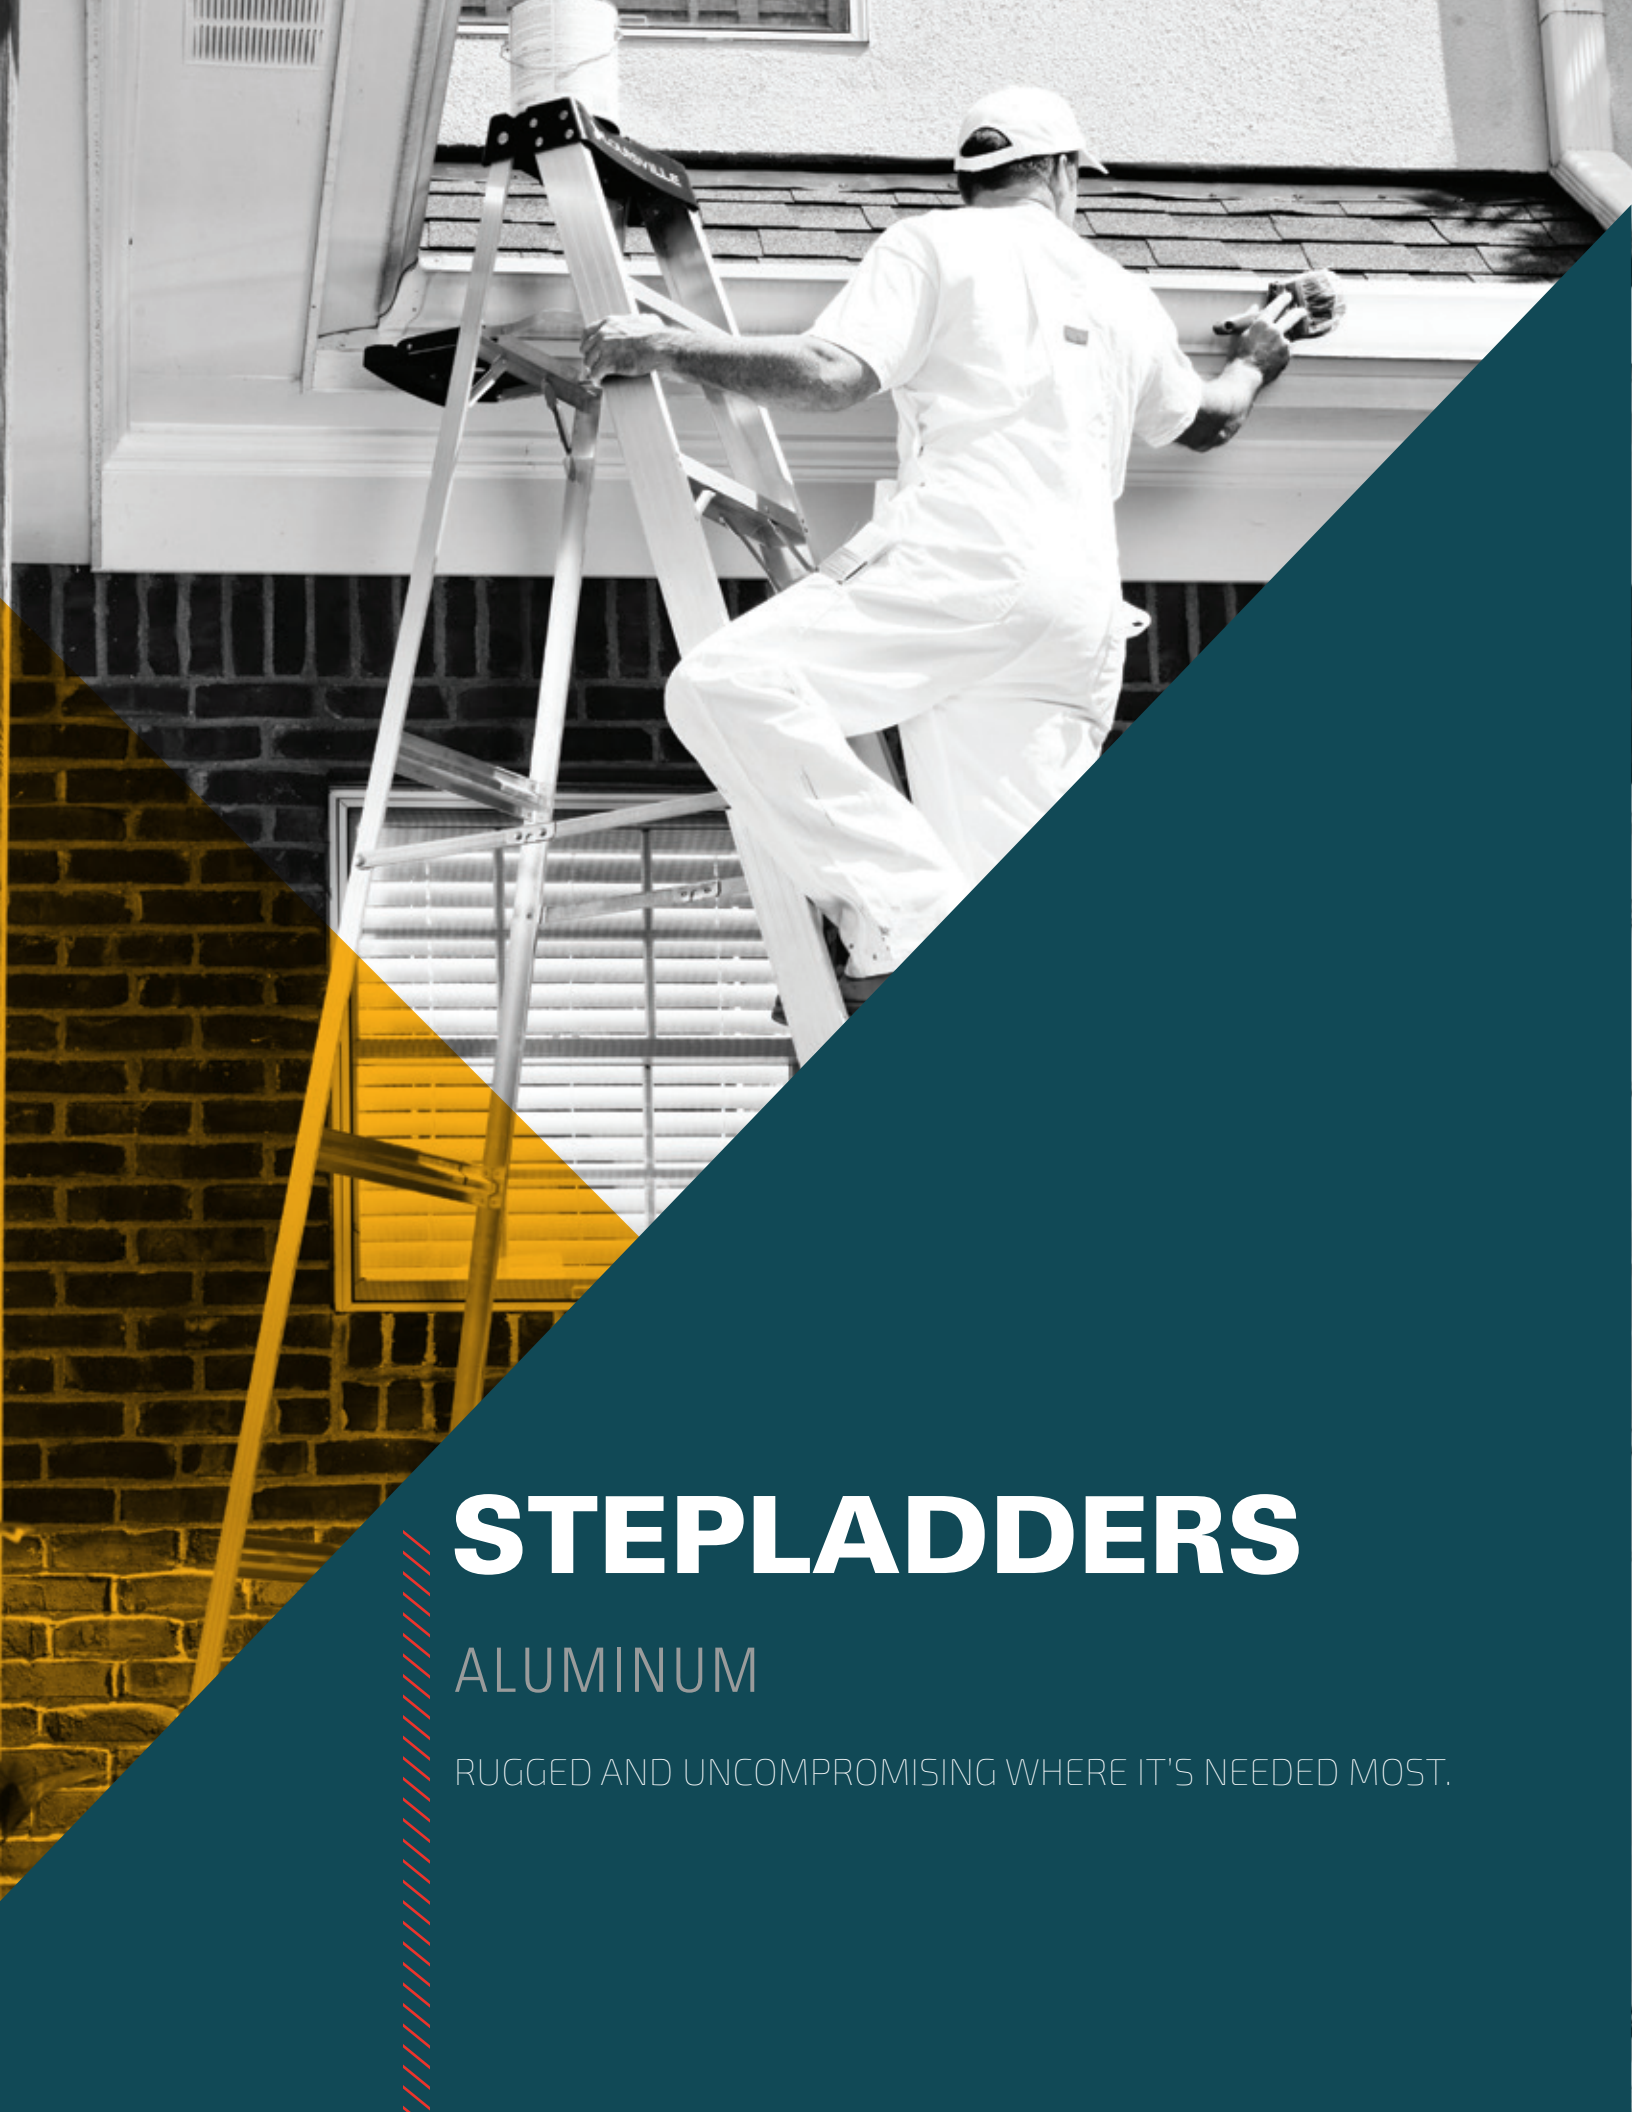

STEPLADDERS

ALUMINUM

RUGGED AND UNCOMPROMISING WHERE IT'S NEEDED MOST.


AS3006




ALSO AVAILABLE
AS3002
FOLDING STEP STOOL

SERIES
AS3000
ALUMINUM STEP LADDER

TYPE IA
300 LBS.
LOAD CAPACITY
INCLUDES WEIGHT OF USER PLUS MATERIALS



1. **ProTop™**—multiple tool slots for increased productivity.
2. Molded pail shelf**.
3. Center-pull spreader braces***.



4. Heavy-duty gusset bracing.
5. Overmolded shoe with increased resistance to wear and tear.

MODEL	LADDER SIZE	MAX. REACH	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES
AS3002**	2'	8' 8"	16 5/8"	18 1/8"	6	1.5'
AS3004	4'	8' 6"	18 1/2"	28 3/8"	13	4.1'
AS3006	6'	10' 5"	21 1/2"	40 3/8"	17	6.9'
AS3008	8'	12' 3"	24 3/4"	52 5/8"	22	10.5'
AS3010	10'	14' 2"	27 1/2"	64 5/8"	29	14.5'

- ▶ *Assumes 5' 7" person with 12" vertical reach
- ▶ **AS3002 is a folding step stool and is not equipped with the molded pail shelf
- ▶ ***Center-pull spreader is only available on 3'-6' models—those outside spreader brace otherwise

AS2106



SERIES
AS2100
ALUMINUM STEP LADDER

TYPE I
250 LBS.
LOAD CAPACITY
INCLUDES WEIGHT OF USER PLUS MATERIALS



1. **ProTop™** — multiple tool slots for increased productivity.
2. Molded pail shelf.
3. Pinch-resistant spreader braces.



4. Steel gusset bracing.
5. Overmolded shoe with increased resistance to wear and tear.

MODEL	LADDER SIZE	MAX. REACH*	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES
AS2104	4'	8' 6"	18 7/8"	28"	11	3.5'
AS2106	6'	10' 4"	21 7/8"	40"	15	6.1'
AS2108	8'	12' 3"	24 7/8"	52"	22	9'
AS2110	10'	14' 2"	27 7/8"	64"	27	12.5'

- ▶ *Assumes 5' 7" person with 12" vertical reach

AS4006



SERIES
AS4000
ALUMINUM STEP LADDER

TYPE II
225 LBS.
LOAD CAPACITY
INCLUDES WEIGHT OF USER PLUS MATERIALS



- 1. Molded top with handyman's tool slots.
- 2. Molded pail shelf.
- 3. Pinch-resistant spreader braces.




- 4. Steel gusset bracing.
- 5. Slip-resistant rubber feet.

MODEL	LADDER SIZE	MAX. REACH*	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES
AS4004	4'	8' 6"	17 7/8"	27 1/2"	10	2.7'
AS4006	6'	10' 5"	20 3/8"	47 1/8"	14	4.7'
AS4008	8'	12' 3"	23 3/16"	51 1/4"	18	7.1'

*Assumes 5' 7" person with 12" vertical reach

AP5006



SERIES
AP5000
ALUMINUM MOBILE
PLATFORM LADDER

TYPE IA
300 LBS.
LOAD CAPACITY
INCLUDES WEIGHT OF USER PLUS MATERIALS



- 1. Top rail guard.
- 2. Handrails.
- 3. Slip-resistant platform.



- 4. Double-rivet step construction.
- 5. Heavy-duty gusset bracing.
- 6. **BODYWEIGHT** ACTIVATED CASTER TECHNOLOGY

MODEL	HEIGHT TO PLATFORM	MAX. REACH*	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES
AP5004	3' 10"	10' 5"	25 1/2"	44"	42	14.9'
AP5006	5' 8"	12' 3"	27 1/4"	55 7/8"	56	21.2'
AP5008	7' 7"	14' 2"	30 1/4"	67 1/4"	68	29.4'

*Assumes 5' 7" person with 12" vertical reach
*All casters are 3" size



STEP STOOLS

BRING EVERYTHING WITHIN REACH.

FY8002



SERIES
FY8000
FIBERGLASS INDUSTRIAL
STEP STAND

TYPE IAA
375 LBS.
LOAD CAPACITY
INCLUDES WEIGHT OF USER PLUS MATERIALS



1. **Raptor Top™**— with slip resistant tread to stand on.



2. Large heavy duty metal shoe with slip-resistant rubber tread.



3. Heavy duty inside spreader brace.



4. 6" step depth with slip-resistant tread.



5. Heavy duty steel double rivet gussets.



6. Optional casters (S56) and handle (S55)**.

MODEL	HEIGHT TO TOP STEP	TOP SIZE	MAX. REACH*	STEP DEPTH	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES
FY8001™	1'	14" x 9 1/4"	7' 8"	6"	15"	16"	8	1.8'
FY8002	1' 11"	14" x 9 1/4"	8' 6"	6"	17 3/8"	21"	13	1.9'
FY8003	2' 09"	14" x 9 1/4"	9' 5"	6"	19 3/4"	27"	19	3.2'

- ▶ *Assumes 5' 7" person with 12" vertical reach
- ▶ **Casters (S56) and handle (S55) option not available for FY8001 model
- ▶ To purchase FY8002 with both options (casters and handle), use suffix FY8002-S55S56

L-3042-03



SERIES
L-3042
FIBERGLASS MINI WORKING
PLATFORM

TYPE IA
300 LBS.
LOAD CAPACITY
INCLUDES WEIGHT OF USER PLUS MATERIALS



1. 12" Wide slip-resistant standing surface.



2. Easy-use locking hinge.



3. Durable handle for easy transportation.



4. Slip-resistant rubber feet.



5. Durable non-conductive fiberglass rails.

MODEL	HEIGHT TO PLATFORM	MAX. REACH*	WORK AREA	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES
L-3042-03	21"	8' 4"	3' x 12"	16 3/8"	52 1/2"	12	2.4'

- ▶ *Assumes 5' 7" person with 12" vertical reach

AY8002



SERIES
AY8000
ALUMINUM INDUSTRIAL
STEP STAND

TYPE IAA
375 LBS.
LOAD CAPACITY
INCLUDES WEIGHT OF USER PLUS MATERIALS



1. **Raptor Top™**— with slip-resistant tread to stand on.



2. Large heavy duty metal shoe with slip-resistant rubber tread.



3. Heavy duty inside spreader brace.



4. 6" step depth with slip-resistant tread.



5. Heavy duty steel double rivet gussets.



6. Optional casters (S56) and handle (S55)**.

MODEL	HEIGHT TO TOP STEP	TOP SIZE	MAX. REACH*	STEP DEPTH	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES
AY8001™	1'	14" x 9 1/4"	7' 8"	6"	15"	16"	8	1.8'
AY8002	1' 11"	14" x 9 1/4"	8' 6"	6"	17 3/8"	21"	13	1.9'
AY8003	2' 9"	14" x 9 1/4"	9' 5"	6"	19 3/4"	27"	19	3.2'

- ▶ *Assumes 5' 7" person with 12" vertical reach
- ▶ **Casters (S56) and handle (S55) option not available for AY8001 model
- ▶ To purchase AY8002 with both options (casters and handle), use suffix AY8002-S55S56

L-2011-03



SERIES
L-2011
ALUMINUM STOCKING STOOL

TYPE IA
300 LBS.
LOAD CAPACITY
INCLUDES WEIGHT OF USER PLUS MATERIALS



1. Portable casters provide easy transportation.



2. 24" Tall handrail for support, providing good balance & stability.



3. Large slip resistant rubber standing steps.



4. Large footing with slip-resistant tread for stability.




5. Two locking hinges on the handrail visually show if the top is secure in the open position.



6. Folds to store in tight spaces.

MODEL	LADDER SIZE	PLATFORM HEIGHT	MAX. REACH*	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT (LBS)	APPROX. CUBES
L-2011-02	2 STEP	1' 5"	8' 0"	21"	21"	17	2.4'
L-2011-03	3 STEP	2' 2"	8' 9"	21 7/8"	33"	22	3.3'
L-2011-04	4 STEP	2' 11"	9' 6"	22 3/8"	44"	27	4.2'

- ▶ *Assumes 5' 7" person with 12" vertical reach

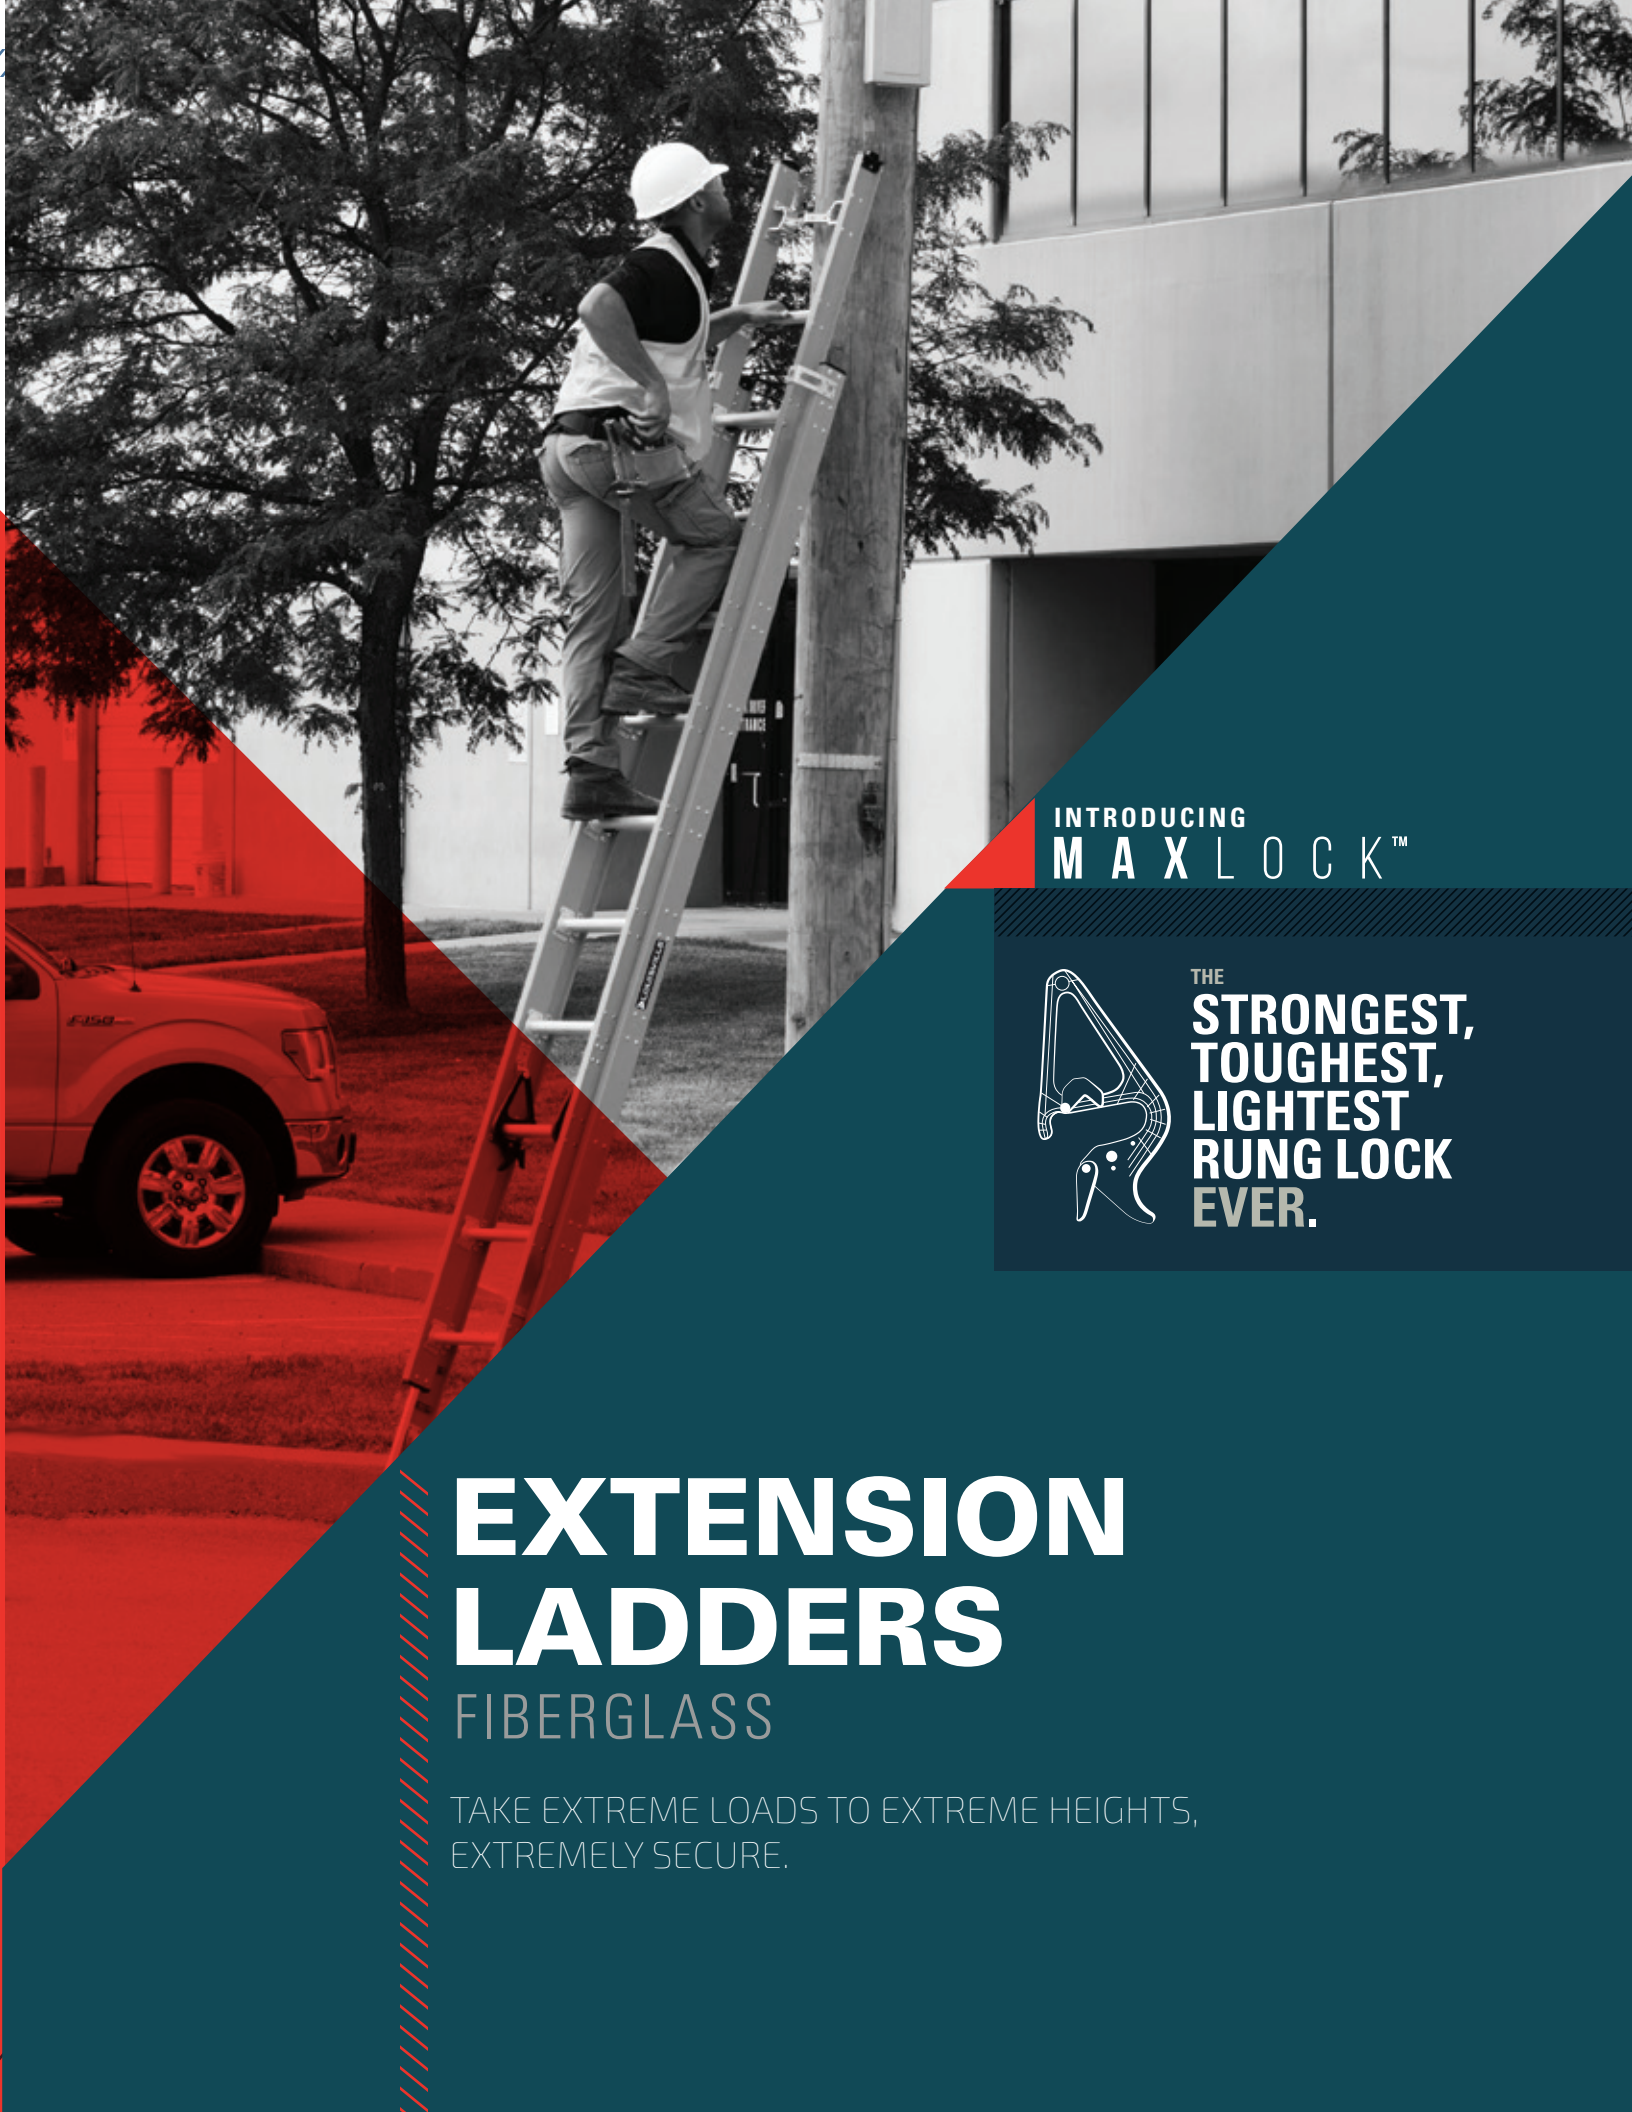

INTRODUCING
MAX LOCK™



THE
**STRONGEST,
TOUGHEST,
LIGHTEST
RUNG LOCK
EVER.**

EXTENSION LADDERS

FIBERGLASS


TAKE EXTREME LOADS TO EXTREME HEIGHTS,
EXTREMELY SECURE.

FE4220HD



SERIES
FE4200HD
FIBERGLASS EXTENSION LADDER

TYPE IAA
375 LBS.
LOAD CAPACITY
INCLUDES WEIGHT OF USER PLUS MATERIALS



RAIL DEPTH	
16-28' models	3 1/4"
32' model	3 1/16"
STACK HEIGHT	
16-28' models	6"
32' model	6 1/16"
INSIDE WIDTH	
base	15 3/8"
fly	13 1/16"
OUTSIDE WIDTH	
base	17 3/4"
fly	16 1/16"

D-RUNG MODELS	TOTAL LENGTH	LENGTH EACH SECTION	MAX. EXTENDED LENGTH	MAX. REACH*	APPROX. WEIGHT (LBS)	APPROX. CUBES
FE4216HD**	16'	8'	13'	15' 11"	41	7.2'
FE4220HD	20'	10'	17'	19' 10"	50	8.9'
FE4224HD	24'	12'	21'	23' 8"	58	10.6'
FE4228HD	28'	14'	25'	27' 7"	67	12.3'
FE4232HD	32'	16'	29'	31' 5"	81	14'

- *Assumes 5' 7" person with 12" vertical reach
- **Available in D-shaped or round rungs. Does not include rope and pulley
- ***Special order item


MAX LOCK™
► D-shaped rungs

L-3022-20PT



SERIES
L-3022-PT
FIBERGLASS EXTENSION LADDER

TYPE IA
300 LBS.
LOAD CAPACITY
INCLUDES WEIGHT OF USER PLUS MATERIALS



RAIL DEPTH	INSIDE WIDTH	BASE	FLY
20-28' models	20-28' models	14 1/16"	13 1/16"
32' model	32' model	15 5/16"	14 5/16"
STACK HEIGHT	OUTSIDE WIDTH	BASE	FLY
16-28' models	20-28' models	17 1/16"	16 1/16"
32-40' models	32' model	17 1/16"	16 1/16"

MODEL	TOTAL LENGTH	LENGTH EACH SECTION	MAX. EXTENDED LENGTH	MAX. REACH*	APPROX. WEIGHT (LBS)	APPROX. CUBES
L-3022-20PT	20'	10'	17'	19' 10"	42	8'
L-3022-24PT	24'	12'	21'	23' 8"	51	9.5'
L-3022-28PT	28'	14'	25'	27' 7"	60	11'
L-3022-32PT	32'	16'	29'	31' 5"	67	12.9'

- *Assumes 5' 7" person with 12" vertical reach

MAX LOCK™
► D-shaped rungs

FE3220



SERIES
FE3200
FIBERGLASS EXTENSION LADDER

TYPE IA
300 LBS.
LOAD CAPACITY
INCLUDES WEIGHT OF USER PLUS MATERIALS



RAIL DEPTH	INSIDE WIDTH	BASE	FLY
16-28' models	20-28' models	14 1/16"	13 1/16"
32' model	32-40' models	15 5/16"	14 5/16"
STACK HEIGHT	OUTSIDE WIDTH	BASE	FLY
16-28' models	20-28' models	17 1/16"	16 1/16"
32-40' models	32' model	17 1/16"	16 1/16"

MODEL	TOTAL LENGTH	LENGTH EACH SECTION	MAX. EXTENDED LENGTH	MAX. REACH*	APPROX. WEIGHT (LBS)	APPROX. CUBES
FE3216**	16'	8'	13'	15' 11"	31	7.8'
FE3220	20'	10'	17'	19' 10"	42	9.6'
FE3224	24'	12'	21'	23' 8"	51	11.5'
FE3228	28'	14'	25'	27' 7"	60	13.4'
FE3232	32'	16'	29'	31' 5"	67	16.2'
FE3236	36'	18'	32'	34' 4"	84	15.8'
FE3240	40'	20'	35'	37' 3"	92	17.5'

INSIDE WIDTH	BASE	FLY	OUTSIDE WIDTH	BASE	FLY
16-28' models	14 1/16"	13 1/16"	16-28' models	17 1/16"	16 1/16"
32-40' models	15 5/16"	14 5/16"	32' model	17 1/16"	16 1/16"

- *Assumes 5' 7" person with 12" vertical reach
- **Does not include rope and pulley

MAX LOCK™
► D-shaped rungs

FE3108



SERIES
FE3100
FIBERGLASS SINGLE LADDER

TYPE IA
300 LBS.
LOAD CAPACITY
INCLUDES WEIGHT OF USER PLUS MATERIALS



1. Mar-resistant rail end caps.

2. D-shaped rungs.



3. Swivel safety shoe with overmolded polymer tread.



4. Direct rung - rail connection.

RAIL DEPTH	INSIDE WIDTH	OUTSIDE WIDTH
8-14' models 16-20' models	3 1/4" 3 5/16"	8-14' models 16-20' models
	14 1/16" 15 5/16"	17 3/16" 17 11/16"

MODEL	TOTAL LENGTH	MAX. REACH*	APPROX. WEIGHT (LBS)	APPROX. CUBES
FE3108	8'	11' 1"	16	4.3'
FE3110	10'	13'	21	5.4'
FE3112	12'	15'	25	6.4'
FE3116	16'	18' 10"	37	8.5

*D-shaped rungs

*Assumes 5' 7" person with 12" vertical reach
*Special order item

FE7220



SERIES
FE7200
FIBERGLASS EXTENSION LADDER

TYPE IA
300 LBS.
LOAD CAPACITY
INCLUDES WEIGHT OF USER PLUS MATERIALS



1. Mar-resistant rail end caps.

2. Outside slide guides.

3. Aluminum rung connector plates.



4. MaxLock™ with QuickLatch™.



5. Swivel safety shoe with overmolded polymer tread.

RAIL DEPTH	INSIDE WIDTH	STACK HEIGHT
16-28' models 32' model 36-40' models	3 1/4" 3 5/16" 3 11/32"	6 1/4"
	base fly	15" 13 11/16"
	OUTSIDE WIDTH	base fly
		17 3/8" 16 1/16"

MODEL	TOTAL LENGTH	LENGTH EACH SECTION	MAX. EXTENDED LENGTH	MAX. REACH*	APPROX. WEIGHT (LBS)	APPROX. CUBES
FE7216*	16'	8'	13'	15' 11"	32	8.1'
FE7220	20'	10'	17'	19' 10"	44	10'
FE7224	24'	12'	21'	23' 8"	53	12'
FE7228	28'	14'	25'	27' 7"	57	13.9'
FE7232	32'	16'	29'	31' 5"	74	15.8'
FE7236	36'	18'	32'	34' 4"	87	21'
FE7240	40'	20'	35'	37' 3"	98	23.3'

MAXLOCK™

*D-shaped rungs

*Assumes 5' 7" person with 12" vertical reach
*Does not include rope or pulley

FE0620



SERIES
FE0600
FIBERGLASS EXTENSION LADDER

TYPE II
225 LBS.
LOAD CAPACITY
INCLUDES WEIGHT OF USER PLUS MATERIALS



1. Mar-resistant rail end caps.

2. Outside slide guides.

3. D-shaped rungs.



4. MaxLock™ with QuickLatch™.



5. Swivel safety shoe with overmolded polymer tread.



6. Direct rung - rail connection.

RAIL DEPTH	INSIDE WIDTH	STACK HEIGHT
3 1/4"	base fly	6 1/4"
	14 11/16" 13 11/16"	
	OUTSIDE WIDTH	base fly
		17 1/16" 16 1/16"

MODEL	TOTAL LENGTH	LENGTH EACH SECTION	MAX. EXTENDED LENGTH	MAX. REACH*	APPROX. WEIGHT (LBS)	APPROX. CUBES
FE0616*	16'	8'	13'	15' 11"	28	6.9'
FE0620	20'	10'	17'	19' 10"	39	7.6'
FE0624	24'	12'	21'	23' 8"	48	9.1'
FE0628**	28'	14'	25'	27' 7"	53	10.6'

MAXLOCK™

*D-shaped rungs


*Assumes 5' 7" person with 12" vertical reach
*Does not include rope or pulley
**Special order item

FE8908



SERIES
FE8900
FIBERGLASS MANHOLE LADDER

TYPE IAA
375 LBS.
LOAD CAPACITY
INCLUDES WEIGHT OF USER PLUS MATERIALS



1. Convenient 14 1/2" -width design.
2. High -vis rail protectors.



3. Round rungs.
4. Heavy duty slip-resistant shoes.

RAIL DEPTH	MODEL	TOTAL LENGTH	MAX. REACH*	APPROX. WEIGHT (LBS)	APPROX. CUBES
3 1/4"	FE8908	8'	11' 1"	17.5	2.5'
INSIDE WIDTH	FE8910	10'	13'	21	3.2'
12 1/8"	FE8912	12'	15'	24.5	3.8'
OUTSIDE WIDTH	FE8914	14'	16' 11"	28	4.4'
14 1/2"	FE8916	16'	18' 10"	34.3	5'

▶ *Assumes 5' 7" person with 12" vertical reach

▶ *Round rungs

FH1007



SERIES
FH1000
FIBERGLASS SHELF LADDER

TYPE IA
300 LBS.
LOAD CAPACITY
INCLUDES WEIGHT OF USER PLUS MATERIALS



1. Rubber bumper.
2. Angled steps.
3. Serrated aluminum steps.



4. Double-rivet step construction.
5. Heavy-duty gusset bracing.
6. Overmolded shoe with increased resistance of wear and tear.

MODEL	LADDER SIZE	MAX. REACH*	LADDER WIDTH	APPROX. WEIGHT (LBS)	APPROX. CUBES
FH1006	6'	9' 5"	15 3/16"	9	2.4'
FH1008	8'	11' 4"	15 3/16"	12	3'
FH1010	10'	13' 3"	15 3/16"	20	3.6'

▶ *Assumes 5' 7" person with 12" vertical reach



INTRODUCING
MAX LOCK™



THE
**STRONGEST,
TOUGHEST,
LIGHTEST
RUNG LOCK
EVER.**

EXTENSION LADDERS

ALUMINUM

BUILT WITH HIGH GRADE CONSTRUCTION
FOR THE HIGHEST STANDARDS.

AE1220HD



SERIES
AE1200HD
ALUMINUM EXTENSION LADDER

TYPE IAA
375 LBS.
LOAD CAPACITY
INCLUDES WEIGHT OF USER PLUS MATERIALS

RAIL DEPTH		INSIDE WIDTH	BASE	FLY
16-40' models	3"	16-40' models	16 7/16"	14 5/16"
44-48' models	4"	44-48' models	18"	15 1/16"
STACK HEIGHT		OUTSIDE WIDTH		
16-40' models	3 1/4"	16-40' models	19 1/16"	16 15/16"
44-48' models	4 1/8"	44-48' models	20 5/8"	18 5/16"

- ▶ *Assumes 5' 7" person with 12" vertical reach
- ▶ **Does not include rope or pulley
- ▶ ***300lbs. Type IA-rated standard ladder
- ▶ ****250 lbs. Type I-rated standard ladder



1. Aluminum caps rail end caps.
2. Outside slide guides.
3. D-shaped rungs.



4. **MaxLock™** with **QuickLatch™**.
5. Full I-beam.
6. Swivel safety shoe with overmolded polymer tread.

MODEL	TOTAL LENGTH	LENGTH EACH SECTION	MAX. EXTENDED LENGTH	MAX. REACH*	APPROX. WEIGHT (LBS)	APPROX. CUBES
AE1216HD**	16'	8'	13'	15' 11"	38	7.3'
AE1220HD	20'	10'	17'	19' 10"	44	9.1'
AE1224HD	24'	12'	21'	23' 8"	52	10.7'
AE1228HD	28'	14'	25'	27' 7"	58	13.4'
AE1232HD	32'	16'	29'	31' 5"	74	15.3'

MAXLOCK™

▶ *D-shaped rungs

AE2110



SERIES
AE2100
ALUMINUM SINGLE LADDER

TYPE IA
300 LBS.
LOAD CAPACITY
INCLUDES WEIGHT OF USER PLUS MATERIALS

RAIL DEPTH	INSIDE WIDTH	OUTSIDE WIDTH
3"	15 9/16"	17 13/16"



1. Mar-resistant rail end caps.
2. D-shaped rungs.



3. Full I-beam.
4. Swivel safety shoe with overmolded polymer tread.

MODEL	TOTAL LENGTH	MAX. REACH*	APPROX. WEIGHT (LBS)	APPROX. CUBES
AE2108	8'	11' 1"	15	4.3'
AE2110	10'	13'	18	5.9'
AE2112	12'	15'	22	6.7'
AE2114	14'	16' 11"	28	7.1'
AE2116	16'	18' 10"	30	9.1'
AE2118	18'	20' 9"	38	9.6'
AE2120	20'	22' 8"	42	10.1'

▶ *Assumes 5' 7" person with 12" vertical reach

▶ *D-shaped rungs

AE2200



SERIES
AE2200
ALUMINUM EXTENSION LADDER

TYPE IA
300 LBS.
LOAD CAPACITY
INCLUDES WEIGHT OF USER PLUS MATERIALS

RAIL DEPTH	INSIDE WIDTH	BASE	FLY
3"	16-24' models	15 9/16"	13 1/16"
STACK HEIGHT	28-40' models	18 3/8"	35 1/4"
	5 1/4"		
OUTSIDE WIDTH	BASE	FLY	
16-24' models	17 13/16"	15 5/16"	
28-40' models	18"	15 7/8"	



1. Mar-resistant rail end caps.
2. Outside slide guides.
3. D-shaped rungs.



4. **MaxLock™** with **QuickLatch™**.
5. Full I-beam.
6. Swivel safety shoe with overmolded polymer tread.

MODEL	TOTAL LENGTH	LENGTH EACH SECTION	MAX. EXTENDED LENGTH	MAX. REACH*	APPROX. WEIGHT (LBS)	APPROX. CUBES
AE2216*	16'	8'	13'	15' 11"	30	6.8'
AE2220	20'	10'	17'	19' 10"	37	8.4'
AE2224	24'	12'	21'	23' 8"	43	10'
AE2228	28'	14'	25'	27' 7"	52	11.6'
AE2232	32'	16'	29'	31' 5"	60	13.2'
AE2236	36'	18'	32'	34' 4"	76	14.8'
AE2240	40'	20'	35'	37' 3"	84	16.4'

- ▶ *Assumes 5' 7" person with 12" vertical reach
- ▶ ** Does not include rope or pulley

MAXLOCK™

▶ *D-shaped rungs

AE3220



SERIES
AE3200
ALUMINUM EXTENSION LADDER

TYPE I
250 LBS.
LOAD CAPACITY
INCLUDES WEIGHT OF USER PLUS MATERIALS



1. Mar-resistant rail end caps.
2. D-shaped rungs.
3. Modified I-beam.



3. MaxLock™ with QuickLatch™.
5. Swivel safety shoes.

RAIL DEPTH	3"
STACK HEIGHT	5 1/4"
INSIDE WIDTH	
base	15 1/4"
fly	13 15/16"
OUTSIDE WIDTH	
base	17 1/2"
fly	16 3/16"

MODEL	TOTAL LENGTH	LENGTH EACH SECTION	MAX. EXTENDED LENGTH	MAX. REACH	APPROX. WEIGHT (LBS)	APPROX. CUBES
AE3216**	16'	8'	13'	15' 11"	27	7.1'
AE3220	20'	10'	17'	19' 10"	32	8.9'
AE3224	24'	12'	21'	23' 8"	38	10.6'
AE3228	28'	14'	25'	27' 7"	53	12.3'
AE3232	32'	16'	29'	31' 5"	60	14'
AE3236	36'	18'	32'	34' 4"	72	15.7'
AE3240	40'	20'	35'	37' 3"	80	17.4'

▶ *Assumes 5' 7" person with 12" vertical reach
▶ ** Does not include rope or pulley


MAXLOCK™
▶ *D-shaped rungs

AE4220PG



SERIES
AE4200PG
ALUMINUM EXTENSION LADDER

TYPE II
225 LBS.
LOAD CAPACITY
INCLUDES WEIGHT OF USER PLUS MATERIALS



1. ProGrip™— Slip resistant tread protects work surface.
2. D-shaped rungs.
3. Modified I-beam.



4. MaxLock™ with QuickLatch™.
5. Swivel safety shoe with overmolded polymer tread.

RAIL DEPTH	3"
STACK HEIGHT	5 1/4"
INSIDE WIDTH	
base	15 1/4"
fly	14 5/16"
OUTSIDE WIDTH	
base	17 1/8"
fly	16 3/16"

MODEL	TOTAL LENGTH	LENGTH EACH SECTION	MAX. EXTENDED LENGTH	MAX. REACH*	APPROX. WEIGHT (LBS)	APPROX. CUBES
AE4216PG**	16'	8'	13'	15' 11"	27	6.2'
AE4220PG	20'	10'	17'	19' 10"	32	7.7'
AE4224PG	24'	12'	21'	23' 8"	38	9.1'
AE4228PG	28'	14'	25'	27' 7"	48	10.5'
AE4232PG	32'	16'	29'	31' 5"	58	12'
AE4240PG	40'	20'	35'	37' 3"	80	14.9'

▶ *Assumes 5' 7" person with 12" vertical reach
▶ ** Does not include rope or pulley

MAXLOCK™

L-2321-16



SERIES
L-2321
ALUMINUM EXTENSION LADDER

TYPE III
200 LBS.
LOAD CAPACITY
INCLUDES WEIGHT OF USER PLUS MATERIALS



1. Mar-resistant rail end caps.
2. D-shaped rungs.



3. Fixed runglock.
4. Slip-resistant feet.

MODEL	TOTAL LENGTH	LENGTH EACH SECTION	MAX. EXTENDED LENGTH	MAX. REACH*	APPROX. WEIGHT (LBS)	APPROX. CUBES
L-2321-16*	16'	8'	13'	15' 11"	16.6	5.7'

▶ *Assumes 5' 7" person with 12" vertical reach
▶ ** Does not include rope or pulley

▶ *D-shaped rungs

L-2324-16



SERIES
L-2324
ALUMINUM EXTENSION LADDER

TYPE III
200 LBS.
LOAD CAPACITY
INCLUDES WEIGHT OF USER PLUS MATERIALS



1. Mar-resistant rail end caps.



2. D-shaped rungs.



3. MaxLock™ with QuickLatch™.



4. Slip-resistant rubber feet.

MODEL	TOTAL LENGTH	LENGTH EACH SECTION	MAX. EXTENDED LENGTH	MAX. REACH*	APPROX. WEIGHT (LBS)	APPROX. CUBES
L-2324-16**	16'	8'	13'	15' 11"	21	5'
L-2324-20	20'	10'	17'	19' 10"	26	6.5'
L-2324-24	24'	12'	21'	23' 8"	39	7.8'

- ▶ *Assumes 5' 7" person with 12" vertical reach
- ▶ ** Does not include rope or pulley

MAXLOCK™

▶ D-shaped rungs

AE1660



SERIES
AE1660
ALUMINUM 3-SECTION
EXTENSION LADDER

TYPE I
250 LBS.
LOAD CAPACITY
INCLUDES WEIGHT OF USER PLUS MATERIALS



1. Aluminum cast rail end caps.



2. Round rungs.



3. Double rope & pulley.



4. Full I-beam.



5. Swivel safety shoe with overmolded polymer tread.

MODEL	TOTAL LENGTH	MAX. EXTENDED LENGTH	MAX. REACH*	RAIL DEPTH	STACK HEIGHT	APPROX. WEIGHT (LBS)	APPROX. CUBES
AE1660	60'	48'	49' 10"	4"	8 1/4"	169	33.8'

- ▶ *Assumes 5' 7" person with 12" vertical reach

SECTION	LENGTH	INSIDE WIDTH	OUTSIDE WIDTH
base	22'	18"	21 1/2"
center	20'	15 5/16"	18 3/16"
fly	18'	12 5/8"	16 1/8"

▶ Round rungs



SPECIALTY LADDERS

UNIQUE SOLUTIONS FOR CONQUERING ANY CHALLENGE.

FXC1207



SERIES
FXC1200

FIBERGLASS STEP TO STRAIGHT LADDER

TYPE IAA
375 LBS.
LOAD CAPACITY
INCLUDES WEIGHT OF USER PLUS MATERIALS



1. Standard pole grip.
2. Inside braces & heavy duty wrap around protects during transportation.
3. Runglock.

4. Double-rivet step construction.
5. Utility-style safety shoes.

MODEL	LADDER SIZE	MAX. EXTENDED LENGTH	MAX. REACH*	FLARED SECTION		PARALLEL SECTION OUTSIDE DIMENSION	APPROX. WEIGHT (LBS)	APPROX. CUBES	MAX. REACH STEP	MAX. REACH EXTENSION
				MIN. OUTSIDE DIMENSION	MAX. OUTSIDE DIMENSION					
FXC1207	7'	11' 8"	18' 3"	17 5/8"	25 1/2"	15"	39	8.3	13' 7"	18' 3"
FXC1208	8'	13' 8"	20' 3"	17 5/8"	26 1/2"	15"	43	9.6'	14' 7"	20' 3"

- ▶ *Assumes 5' 7" person with 12" vertical reach
- ▶ Add suffix -E59 to model number for optional Levelok (Manual Leveler)

FT1506



SERIES
FT1500

FIBERGLASS TRIPOD LADDER

TYPE IA
300 LBS.
LOAD CAPACITY
INCLUDES WEIGHT OF USER PLUS MATERIALS



1. **Raptor Top™**— multiple tool slots and magnet for increased productivity.
2. Center Pull Spreader Brace.
3. Double-rivet step construction & Heavy Duty gusset.

4. **Raptor Boot™**— Protects fiberglass & has heavy duty bonded tread.
5. **SHOX™** Advanced impact absorption protects fiberglass rails against damage.
6. Wider step surface.

MODEL	LADDER SIZE	BOTTOM WIDTH	APPROX. SPREAD	MAX. STANDING HEIGHT	MAX. REACH*	APPROX. WEIGHT (LBS)	APPROX. CUBES
FT1506	6'	35 1/2"	44"	3' 9"	10' 4"	21	10.9
FT1508	8'	43"	56"	5' 7"	12' 3"	30	17.1
FT1510	10'	50 1/2"	67"	7' 6"	14' 2"	44	24.7

- ▶ *Assumes 5' 7" person with 12" vertical reach

L-2032-02



SERIES
L-2032

ALUMINUM SAWHORSE SCAFFOLD

TYPE IA
300 LBS.
LOAD CAPACITY
INCLUDES WEIGHT OF USER PLUS MATERIALS



1. Heavy duty, slip resistant, large 10" standing surface.
2. Steel hinges & gap for easy carrying.
3. Heavy duty pinch-resistant spreader braces.

4. Heavy-duty gusset bracing.
5. Overmolded shoe with increased resistance to wear and tear.

MODEL	LADDER SIZE	BOTTOM WIDTH	APPROX. SPREAD	MAX. STANDING HEIGHT	MAX. REACH*	APPROX. WEIGHT (LBS)	APPROX. CUBES
L-2032-02	2'	32"	26"	1' 10"	8' 5"	13	5
L-2032-03	3'	33 3/8"	34"	2' 9"	9' 4"	19	7.7
L-2032-04	4'	34 3/4"	43"	3' 9"	10' 4"	25	10.5

- ▶ *Assumes 5' 7" person with 12" vertical reach

L-2098-22



SERIES
L-2098
ALUMINUM MULTIPURPOSE LADDER

TYPE IA
300 LBS.
LOAD CAPACITY
INCLUDES WEIGHT OF USER PLUS MATERIALS



1. Easy operation with lightweight aluminum design.



2. Advanced heavy duty polymer spring loaded L-locks.



3. Easy-to-use flip & lock hinges.



4. Slip-resistant rubber feet.



4 POSITIONS

EXTENSION LADDER



STEPLADDER



STAIRWAY



SCAFFOLD



Scaffold sold separately.

MODEL	LADDER SIZE	LADDER WIDTH	APPROX. WEIGHT (LBS)	APPROX. CUBES	FOLDED DIMENSIONS (H x W x D)**	STEP LADDER MAX. REACH*	EXTENSION MAX. REACH*	ADJUSTABLE			
								STEP LADDER	STAIRWAY	SCAFFOLDING	EXTENSION
L-2098-13	13'	22	24	4.2'	8" x 22" x 44"	9' 6"	14' 3"	3' - 5'	3' - 5'	1' - 2'	7' - 11'
L-2098-17	17'	26	29	5.7'	8" x 26" x 56"	11' 5"	18' 1"	4' - 7'	4' - 7'	1' - 3'	9' - 15'
L-2098-22	22'	29	35	6.9'	8" x 29" x 68"	13' 3"	21' 10"	5' - 9'	5' - 9'	1' - 4'	11' - 19'

*Assumes 5' 7" person with 12" vertical reach

**Width is based on widest point (bottom)



WAREHOUSE LADDERS / SCAFFOLDS / PLANKS


WORKSITE SOLUTIONS THAT ELEVATE EFFICIENCY.

P SERIES

SCAFFOLD PLANKS AND STORAGE PLATFORMS



1. Ergonomic, easy-grip molded handles/rungs.



3. Slip-resistant decking.



2. Reinforcing web braces.



4. Optional modular handrail system.




Overflow slots keep water, mud & snow from building up on the surface



Angled surface designed to keep fluids flowing out & away

P1 SERIES


1-Person Decorator Plank 250LBS. LOAD CAPACITY



SIZE	SIDE RAIL DEPTH	12"-wide MODEL	APPROX. WEIGHT (LBS)	14"-wide MODEL	APPROX. WEIGHT (LBS)	20"-wide MODEL	APPROX. WEIGHT (LBS)
8'*	4"	P11208	26	P11408	29	P12008	33
16'	4"	P11216	50	P11416	52	P12016	57
20'	5"	P11220	64	P11420	74	P12020	83
24'	5"	P11224	85	P11424	88	P12024	94

P2 SERIES


2-Person Scaffold Plank and Stage 500LBS. LOAD CAPACITY

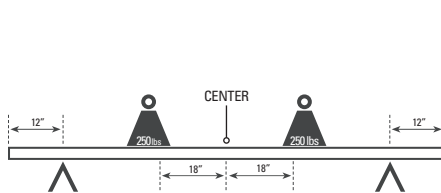

SIZE	SIDE RAIL DEPTH	12"-wide MODEL	APPROX. WEIGHT (LBS)	14"-wide MODEL	APPROX. WEIGHT (LBS)	20"-wide MODEL	APPROX. WEIGHT (LBS)	24"-wide MODEL	APPROX. WEIGHT (LBS)	28"-wide MODEL	APPROX. WEIGHT (LBS)
5'	4"	-	-	-	-	-	-	-	-	P22805	20
6'	4"	P21206	13	-	-	-	-	-	-	P22806	22
12'	4"	P21212	40	P21412	44	P22012	49	P22412	55	P22812	56
14'	5"	-	-	-	-	-	-	-	-	P22814	71
16'	5"	P21216	58	P21416	64	P22016	65	P22416	78	P22816	79
20'	6"	P21220	95	P21420	101	P22020	110	P22420	120	P22820	121
24'	6"	P21224	109	P21424	116	P22024	127	P22424	138	P22824	141
28'	6"	P21228	139	P21428	147	P22028	159	P22428	171	P22828	178
30'	6"	-	-	-	-	-	-	-	-	P22830	189
32'	6"	P21232	160	P21432	164	P22032	172	P22432	191	P22832	200

P3 SERIES

3-Person Stage Platform 750LBS. LOAD CAPACITY



SIZE	SIDE RAIL DEPTH	20"-wide MODEL	APPROX. WEIGHT (LBS)	24"-wide MODEL	APPROX. WEIGHT (LBS)	28"-wide MODEL	APPROX. WEIGHT (LBS)
16'	6"	P32016	83	P32416	105	P32816	105
20'	6"	P32020	114	P32420	131	P32820	131
24'	6"	P32024	129	P32424	153	P32824	153
28'	7"	P32028	210	P32428	228	P32828	228
32'	7"	-	-	P32432	262	P32832	262
40'	7"	-	-	-	-	P32840	349

MODULAR GUARDRAIL SYSTEMS

FOR PLANKS AND STAGES

ANSI
American National Standards Institute
ANSI A10.8

OSHA
Occupational Safety and Health
REQUIREMENT



- ▶ *Double all quantities, except for web brace assembly, for 2-Sided Systems
- ▶ **Required on planks with side rails of less than 6"-height
- ▶ ***MER-01 required on 12" and 14"-wide planks. MER-02 required on 20", 24" and 28"-wide planks.

SINGLE-SIDED SYSTEM*

PLANK LENGTH	GUARDRAIL POST ASSEMBLY	9' GUARDRAIL LENGTH	13' GUARDRAIL LENGTH	9' TOEBOARD LENGTH	13' TOEBOARD LENGTH	WEB BRACE ASSEMBLY
	MPT-01	MGR-09	MGR-13	MTB-09	MTB-13	MRF-01
5'	2	2	0	1	0	2**
6'	2	2	0	1	0	2**
8'	2	2	0	1	0	2**
10'	2	0	2	0	1	2**
12'	3	0	2	0	1	3**
14'	3	0	2	0	1	3**
16'	3	4	0	2	0	3**
18'	3	0	4	0	2	3**
20'	4	6	0	3	0	4**
24'	4	6	0	3	0	4**
28'	5	4	2	2	1	0**
30'	5	8	0	4	0	0**
32'	5	4	4	2	2	0**
36'	6	10	0	5	0	0**
40'	6	6	4	3	2	0**

3-SIDED SYSTEM

PLANK LENGTH	GUARDRAIL POST ASSEMBLY	9' GUARDRAIL LENGTH	13' GUARDRAIL LENGTH	9' TOEBOARD LENGTH	13' TOEBOARD LENGTH	WEB BRACE ASSEMBLY	ENDRAIL ASSEMBLY
	MPT-01	MGR-09	MGR-13	MTB-09	MTB-13	MRF-01	MER-01*/MER-02*
5'	4	2	0	1	0	2**	2
6'	4	2	0	1	0	2**	2
8'	4	2	0	1	0	2**	2
10'	4	0	2	0	1	2**	2
12'	5	0	2	0	1	3**	2
14'	5	0	2	0	1	3**	2
16'	5	4	0	2	0	3**	2
18'	5	0	4	0	2	3**	2
20'	6	6	0	3	0	4**	2
24'	6	6	0	3	0	4**	2
28'	7	4	2	2	1	0**	2
30'	7	8	0	4	0	0**	2
32'	7	4	4	2	2	0**	2
36'	8	10	0	5	0	0**	2
40'	8	6	4	3	2	0**	2

RAIL END CAPS

RAIL SIZE	MODEL	APPROX. WEIGHT (LBS)
Caps for 4" Rail	PK740A	0.65 Ea.
Caps for 5" Rail	PK740B	0.80 Ea.
Caps for 6" Rail	PK740C	1.07 Ea.
(2 end caps and hardware per kit)		
Caps for 7" Rail	P064226	0.8 Ea.

PRODUCT WEIGHTS

ITEM	APPROX. WEIGHT (LBS)
MPT-01	0.56
MGR-09	2.31
MGR-13	3.33
MTB-09	2.38
MTB-13	3.44
MRF-01	1.13
MER-01	2.00
MER-02	2.84

PT SERIES GUARDRAIL

HANDRAIL SOCKET WITH HARDWARE	MODEL	APPROX. WEIGHT (LBS)
3" Handrail socket w/ hardware	PR098004C	1

- ▶ ***MER-01 required on 12" and 14"-wide planks. MER-02 required on 20", 24" and 28"-wide planks.

4-SIDED SYSTEM

PLANK LENGTH	GUARDRAIL POST ASSEMBLY	9' GUARDRAIL LENGTH	13' GUARDRAIL LENGTH	9' TOEBOARD LENGTH	13' TOEBOARD LENGTH	WEB BRACE ASSEMBLY	ENDRAIL ASSEMBLY
	MPT-01	MGR-09	MGR-13	MTB-09	MTB-13	MRF-01	MER-01/MER-02***
5'	4	4	0	2	0	2**	2
6'	4	4	0	2	0	2**	2
8'	4	4	0	2	0	2**	2
10'	4	0	4	0	2	2**	2
12'	6	0	4	0	2	3**	2
14'	6	0	4	0	2	3**	2
16'	6	8	0	4	0	3**	2
18'	6	0	8	0	4	3**	2
20'	8	12	0	6	0	4**	2
24'	8	12	0	6	0	4**	2
28'	10	8	4	4	2	0**	2
30'	10	16	0	8	0	0**	2
32'	10	8	8	4	4	0**	2
36'	12	20	0	10	0	0**	2
40'	12	12	8	6	4	0**	2

L-P2 SERIES

NESTABLE STAGES

2-PERSON PLANK

500 LBS.
LOAD CAPACITY



1. Interlocking nestable system.
2. End caps provide a smooth, continuous walkway.
3. Durable, light-weight aluminum end caps.



4. Overflow slots keep water, mud & snow from building up on the surface.
5. Angled surface designed to keep fluids flowing out & away.

MODEL	PLANK LENGTH	PLANK WIDTH	RAIL SIZE	APPROX. WEIGHT (LBS)	MODEL	PLANK LENGTH	PLANK WIDTH	RAIL SIZE	APPROX. WEIGHT (LBS)
L-P21212A	12'	12"	6"	54	L-P22012A	12'	20"	6"	64
L-P21216A	16'	12"	6"	73	L-P22016A	16'	20"	6"	87
L-P21220A	20'	12"	6"	95	L-P22020A	20'	20"	6"	113
L-P21224A	24'	12"	6"	109	L-P22024A	24'	20"	6"	129



LP-2921 SERIES

MEDIUM-DUTY TELESCOPING PLANK

This medium-duty telescoping plank is available in 9', 13', and 16' sizes (fully extended). The plank is manufactured with heavy wall aluminum tubing to prevent the twisting and flexing common to most other planks. The built-in, skid-resistant surface reduces slips. It stores and transports in approximately half of its fully extended length. The telescoping plank has the strength to do the job safely, and the compactness to store easily after the work is done. 250 lb. rated.

MODEL	PLANK LENGTH	PLANK WIDTH	STANDARD EXTENSION	APPROX. WEIGHT (LBS)
LP-2921-09A	9'	12"	6' - 9'	29
LP-2921-13A	13'	12"	8' - 13'	38
LP-2921-16A	16'	12"	10' - 16'	49

PD8000 AND PD9200 SERIES

SCAF-A-DECK

PD9207



PD9200 SERIES



1. Safety latch.
2. Solid bolt construction.

MODEL	PLANK LENGTH	PLANK WIDTH	RAIL SIZE	CAPACITY (LBS/FT')	APPROX. WEIGHT (LBS)
PD9207	7'	19 1/8"	2"	75	32
PD9208	8'	19 1/8"	2"	75	35
PD9210	10'	19 1/8"	2"	50	42



SRA10 SERIES

LADDER RACKS

Louisville Ladder's SRA10 ladder rack merchandisers are designed specifically to increase ladder sales. Holds up to six ladders. Easy to assemble. Ladders & accessories not included.

MODEL	LADDER CAPACITY	FOOTPRINT	APPROX. WEIGHT (LBS)
SRA10-06	6	26" x 46"	38





ATTIC LADDERS

MAKE MORE STORAGE MORE ACCESSIBLE.

AA2210

SERIES
ELITE
ALUMINUM ATTIC LADDER

TYPE IAA
375 LBS.
LOAD CAPACITY
INCLUDES WEIGHT OF USER PLUS MATERIALS



1. Wide clearance.



2. Advanced cylinder design.



3. Ergonomic T-handle.



4. Slip-resistant cross-tread steps.



5. Adjustable shoes.

STEP WIDTH	RAIL SIZE	MODEL	FITS CEILING HEIGHTS		ROUGH OPENING	APPROX. LANDING SPACE	APPROX. PROJECT WIDTH	APPROX. WEIGHT (LBS)	APPROX. CUBES
			MIN	MAX					
3 1/4"	3 1/8"	AA2210	7'8"	10'3"	22 1/2" x 54"	67"	74"	45	7.9'
		AA2510	7'8"	10'3"	25 1/2" x 54"	67"	74"	47	9'




All Elite ladders are available with optional fireproofing treatment feature. Add prefix FT before each model to order (e.g. FTaa2210).

AEE2210

SERIES
ENERGY EFFICIENT
ALUMINUM ATTIC LADDER

TYPE IAA
375 LBS.
LOAD CAPACITY
INCLUDES WEIGHT OF USER PLUS MATERIALS



1. Wider clearance.



2. Advanced cylinder design.



3. Ergonomic T-handle.



4. Slip-resistant cross-tread steps.



5. Adjustable shoes.



R-10 insulated door panel


Weather stripping seal

STEP WIDTH	RAIL SIZE	MODEL	FITS CEILING HEIGHTS		ROUGH OPENING	APPROX. LANDING SPACE	APPROX. PROJECT WIDTH	APPROX. WEIGHT (LBS)	APPROX. CUBES
			MIN	MAX					
3 1/4"	3 1/8"	AEE2510	7'7"	10'3"	25 1/2" x 54"	69"	74"	61	10.5'
		AEE3010	7'7"	10'3"	30" x 54"	69"	74"	73.2	13.4'

AL228P

SERIES
EVEREST
ALUMINUM ATTIC LADDER

350 LBS.
LOAD CAPACITY
INCLUDES WEIGHT OF USER PLUS MATERIALS



1. Easy-hang strap.



2. R3.8 insulated door.



3. Hook & pole for easy door opening.



4. Multiple handrails.



5. Heavy-duty hinges.



6. Adjustable shoes.

STEP WIDTH	RAIL SIZE	MODEL	FITS CEILING HEIGHTS		ROUGH OPENING	APPROX. LANDING SPACE	APPROX. PROJECT WIDTH	APPROX. WEIGHT (LBS)	APPROX. CUBES
			MIN	MAX					
3 1/4"	3 1/8"	AL228P	10'	12'	22 1/2" x 63"	84"	90"	61	8.3'
		AL258P	10'	12'	25 1/2" x 63"	84"	90"	66	10.1'



All Everest ladders are available with optional fireproofing treatment feature. Add prefix FT before each model to order (e.g. FTal228p).



LogoLock

SYSTEM FOR FIBERGLASS LADDERS

PROMOTE YOUR CUSTOMER'S NAME WITH THE LOGOLOCK™ SYSTEM


LogoLock™ embeds a long-lasting image into the fiberglass rail of your ladders.

WHY USE LOGOLOCK™?

- Increase awareness and scope of your brand
- Refresh your company's image
- Deter theft by displaying your company's logo

HOW TO ORDER LOGOLOCK™?

- Incremental fee for each logo (added to the price of each ladder)
- Each ladder will have one custom logo applied to each side rail
- Logo dimensions should be a maximum of 7 1/16" x 2 3/8"
- Minimum order of six fiberglass ladders (any model)
- Artwork must be provided in vector format or in ".tif" or ".jpg" format at a MINIMUM of 300 dpi (dots per inch) resolution. Submit detailed instructions for logo display including color, placement, size and other customization
- After we review your images, we'll provide a customized part number and distributor pricing
- Lead time is from 5 to 10 business days

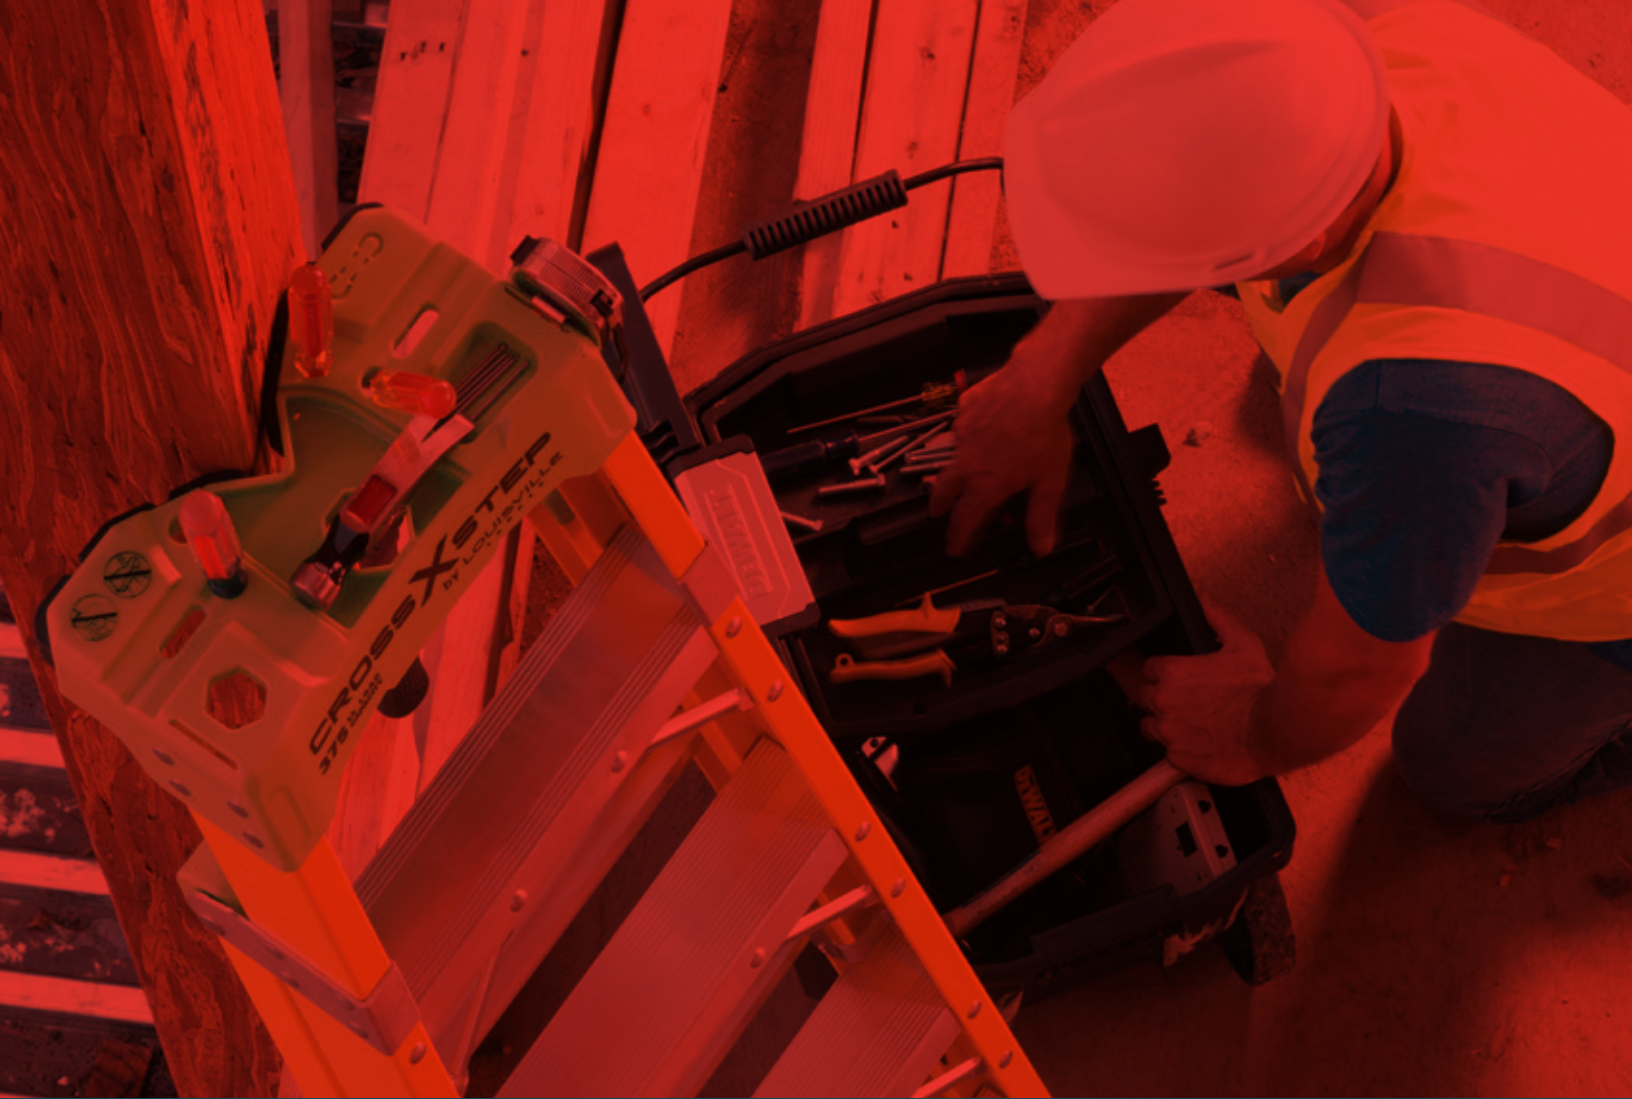

C.L.I.M.B. ACADEMY



SAFETY TRAINING PROGRAM

Louisville Ladder's C.L.I.M.B. ACADEMY teaches fundamental principles of using stepladders, extension ladders, rolling warehouse ladders, rolling tower scaffolding, and aluminum walkboards. In addition to C.L.I.M.B. ACADEMY, our customers benefit from free ladder condition assessments and ladder use audits. Several of our customers have saved thousands of dollars by avoiding OSHA fines and ladder-related accidents.

CHOOSE *the right equipment*
LOOK *for damaged or missing parts*
IMPLEMENT *a safe setup routine*
MOVE *safely using three points of contact*
BE *a climbing safety expert; NOT a statistic!*

REDUCE THE RISK OF
ACCIDENTS & FINES
AT THE WORK SITE

Visit our website to learn more at www.louisvilleladder.com

CONNECT

WITH LOUISVILLE LADDER AT



Check out the personal side of Louisville Ladder.



Visit the Louisville Ladder Website for up to date product info and where to buy.



Connect with the Louisville Ladder community.



Engage with the Professional side of Louisville Ladder.



Follow us for the latest commentary on products and the industry.



Watch the latest product information and instructional videos.

TERMS AND CONDITIONS

Louisville Ladder, Inc. is herein referred to as the "Seller" and the customer or person or entity purchasing goods ("Goods") from Seller is referred to as the "Buyer". These Terms and Conditions, any quotation or acknowledgment from Seller relevant to the sale of the Goods and all documents incorporated by specific reference therein, constitute the complete and exclusive statement of the terms of the agreement governing the sale of Goods by Seller to Buyer. Any other language proposed by Buyer, including Buyer's Purchase Order language shall not control over these Terms. Buyer's acceptance of the Goods will manifest Buyer's assent to these Terms and Conditions.

1. PRICES: All prices are exclusive of taxes, transportation and insurance, which are to be borne by Buyer.

2. TAXES: Any tax or governmental charge affecting Seller's costs of production, sale, or delivery shall be for Buyer's account and shall be added to the price.

3. TERMS OF PAYMENT: Unless otherwise specified by Seller, terms are 1% ten (10), net thirty (30) days from date of Seller's invoice in U.S. currency. Seller shall have the right, among other remedies, either to terminate this agreement or to suspend further performance under this and/or other agreements with Buyer in the event Buyer fails to make any payment when due. Buyer shall be liable for all expenses, including attorneys' fees, relating to the collection of past due amounts. Should Buyer's financial responsibility become unsatisfactory to Seller, cash payments or security satisfactory to Seller may be required by Seller for future deliveries and for the Goods theretofore delivered.

4. FREIGHT POLICY: Freight prepaid on shipments to one destination within the continental U.S. that total 1000 pounds or more of fiberglass and/or aluminum products or 1000 pounds of any combination including wood and steel.

FREIGHT DAMAGE: All shipments should be inspected for completeness and damage prior to signing carrier's bill of lading. All shortages and freight damage should be noted on the bill of lading. If the damage is excessive, refuse the delivery. Please advise customer service of the action taken. All hidden damage needs to be reported to within 48 hours of delivery. Louisville is not responsible for shipments that are not signed-reported for as being short or "damaged on arrival."

5. SHIPMENT AND DELIVERY: Deliveries are made F.O.B. Seller's shipping point. Risk of loss or damage and responsibility shall pass from Seller to Buyer upon delivery. Any claims for shortages or damages suffered in transit shall be submitted by the Buyer directly to the carrier. While Seller will use all reasonable commercial

efforts to maintain the delivery date(s) acknowledged or quoted by Seller, all shipping dates are approximate and not guaranteed. Seller reserves the right to make partial shipments. Seller, at its option, shall not be bound to tender delivery of any Goods for which Buyer has not provided shipping instructions. If the shipment of the Goods is postponed or delayed by Buyer for any reason, Buyer agrees to reimburse Seller for any and all storage costs and other additional expenses resulting therefrom.

6. LIMITED WARRANTY: Subject to the limitations of Section 7, Seller warrants that the Goods manufactured by Seller will be free from defects in material and under normal use and regular service and maintenance for a period of one year from the date of shipment of the Goods by Seller, unless otherwise specified by Seller in writing. THIS IS THE SOLE AND EXCLUSIVE WARRANTY GIVEN BY SELLER WITH RESPECT TO THE GOODS AND IS IN LIEU OF AND EXCLUDES ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, ARISING BY OPERATION OF LAW OR OTHERWISE, INCLUDING WITHOUT LIMITATION, MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE WHETHER OR NOT THE PURPOSE OR USE HAS BEEN DISCLOSED TO SELLER IN SPECIFICATIONS, DRAWINGS OR OTHERWISE, AND WHETHER OR NOT SELLER'S PRODUCTS ARE SPECIFICALLY DESIGNED AND/OR MANUFACTURED BY SELLER FOR BUYER'S USE OR PURPOSE. This warranty does not extend to any losses or damages due to misuse, accident, abuse, neglect, normal wear and tear. Buyer's negligence, unauthorized modification or alteration, use beyond rated capacity, or improper installation, maintenance or application. To the extent that Seller has relied upon any specifications, information, representation of operating conditions or other data supplied by Buyer or its agents to Seller in the selection or design of the Goods and the preparation of Seller's quotation, and in the event that actual operating conditions or other conditions differ from those represented by Buyer and relied upon by Seller, any warranties or other provisions contained herein which are affected by such conditions shall be null and void. If within thirty (30) days after Buyer's discovery of any warranty defects within the warranty period, Buyer notifies Seller thereof in writing. Seller shall, at its option, repair, correct or replace F.O.B. point of manufacture, that portion of the Goods found by Seller to be defective. Failure by Buyer to give such written notice within the applicable time period shall be deemed an absolute and unconditional waiver of Buyer's claim for such defects. Goods repaired or replaced during the warranty period shall be covered by the foregoing warranty for the remainder of the original warranty period or ninety (90) days, whichever is longer. Buyer assumes all other responsibility for any loss, damage, or injury to persons or property arising out of, connected with, or resulting from the use of Goods, either alone or in combination with other products/components.

7. LIMITATION OF REMEDY AND LIABILITY: THE SOLE AND EXCLUSIVE REMEDY FOR BREACH OF ANY WARRANTY

HEREUNDER (OTHER THAN THE WARRANTY PROVIDED UNDER SECTION 7) SHALL BE LIMITED, AT SELLER'S OPTION, TO REPAIR, CORRECTION OR REPLACEMENT UNDER SECTION 5. SELLER SHALL NOT BE LIABLE FOR DAMAGES CAUSED BY DELAY IN PERFORMANCE AND IN NO EVENT, REGARDLESS OF THE FORM OF THE CLAIM OR CAUSE OF ACTION (WHETHER BASED IN CONTRACT, INFRINGEMENT, NEGLIGENCE, STRICT LIABILITY, OTHER TORT OR OTHERWISE), SHALL SELLER'S LIABILITY TO BUYER AND/OR ITS CUSTOMERS EXCEED THE PRICE PAID BY BUYER FOR THE SPECIFIC GOODS PROVIDED BY SELLER GIVING RISE TO THE CLAIM OR CAUSE OF ACTION. BUYER AGREES THAT IN NO EVENT SHALL SELLER'S LIABILITY TO BUYER AND/OR ITS CUSTOMERS EXTEND TO INCLUDE INCIDENTAL, CONSEQUENTIAL OR PUNITIVE DAMAGES. The term "consequential damages" shall include, but not be limited to, loss of anticipated profits, business interruption, loss of use or revenue, cost of capital or loss or damage to property or equipment. It is expressly understood that any technical advice furnished by Seller with respect to the use of the Goods is given without charge, and Seller assumes no obligation or liability for the advice given, or results obtained, all such advice being given and accepted at Buyer's risk.

8. PATENTS AND COPYRIGHTS: Subject to the limitations of the second paragraph of Section 6, Seller warrants that the Goods sold, except as are made specifically for Buyer according to Buyer's specifications, do not infringe any valid U.S. patent or copyright in existence as of the date of shipment. This warranty is given upon the condition that Buyer promptly notify Seller of any claim or suit involving Buyer in which such infringement is alleged, and that Buyer cooperate fully with Seller and permit Seller to control completely the defense, settlement or compromise of any such allegation of infringement. Seller's warranty as to use only applies to infringements arising solely out of the inherent operation of such Goods. In the event such Goods are held to infringe such a U.S. patent or copyright in such suit, and the use of such Goods is enjoined, or in the case of a compromise or settlement by Seller, Seller shall have the right, at its option and expense, to procure for Buyer the right to continue using such Goods, or replace them with non-infringing Goods, or modify same to become non-infringing, or grant Buyer a credit for the depreciated value of such Goods and accept return of them.


9. EXCUSE OF PERFORMANCE: Seller shall not be liable for delays in performance or for non-performance due to acts of God; acts of Buyer; war; fire; flood; weather; sabotage; strikes; or labor or civil disturbances; governmental requests, restrictions, laws, regulations, orders or actions; unavailability of or delays in transportation; default of suppliers; or unforeseen circumstances or any events or causes beyond Seller's reasonable control. Deliveries or other performance may be suspended for an appropriate period of time or

anceled by Seller upon notice to Buyer in the event of any of the foregoing, but the balance of the agreement shall otherwise remain unaffected as a result of the foregoing. If Seller determines that its ability to supply the total demand for the Goods, or to obtain material used directly or indirectly in the manufacture of the Goods, is hindered, limited or made impracticable due to causes set forth in the preceding paragraph, Seller may allocate its available supply of the Goods or such material (without obligation to acquire other supplies of any such Goods or material) among its purchasers on such basis as Seller determines to be equitable without liability for any failure of performance which may result therefrom. Seller reserves the right to change designs and specifications for the Goods without prior notice to Buyer, except with respect to Goods being made-to-order for Buyer.

10. ASSIGNMENT: Buyer shall not assign its rights or delegate its duties hereunder or any interest therein or any rights hereunder without the prior written consent of the Seller, and any such assignment, without such consent, shall be void.

11. GENERAL PROVISIONS: These terms and conditions supersede all other communications, negotiations and prior oral or written statements regarding the subject matter of these terms and conditions. No change, modification, rescission, discharge, abandonment, or waiver of these terms and conditions shall be binding upon the Seller unless made in writing and signed on its behalf by a duly authorized representative of the Seller. No conditions, usage or trade, course of dealing or performance, understanding or agreement purporting to modify, vary, explain, or supplement these terms and conditions shall be binding unless hereafter made in writing and signed by the party to be bound, and no modification shall be affected by the Seller's receipt, acknowledgment, or acceptance of purchase orders, shipping instruction forms, or other documentation containing terms at variance with or in addition to those set forth herein. No waiver by either party with respect to any breach or default or of any right or remedy and no course of dealing, shall be deemed to constitute a continuing waiver of any other breach or default or of any other right or remedy, unless such waiver be expressed in writing and signed by the party to be bound. All typographical or clerical errors made by Seller in any quotation, acknowledgment or publication are subject to correction. The validity, performance, and all other matters relating to the interpretation and effect of this agreement shall be governed by the law of the state of Kentucky. Buyer and Seller agree that the proper venue for all actions arising in connection herewith shall be only in the State where the Goods involved in such actions were manufactured and the parties agree to submit to such jurisdiction.

WAREHOUSE LOCATIONS

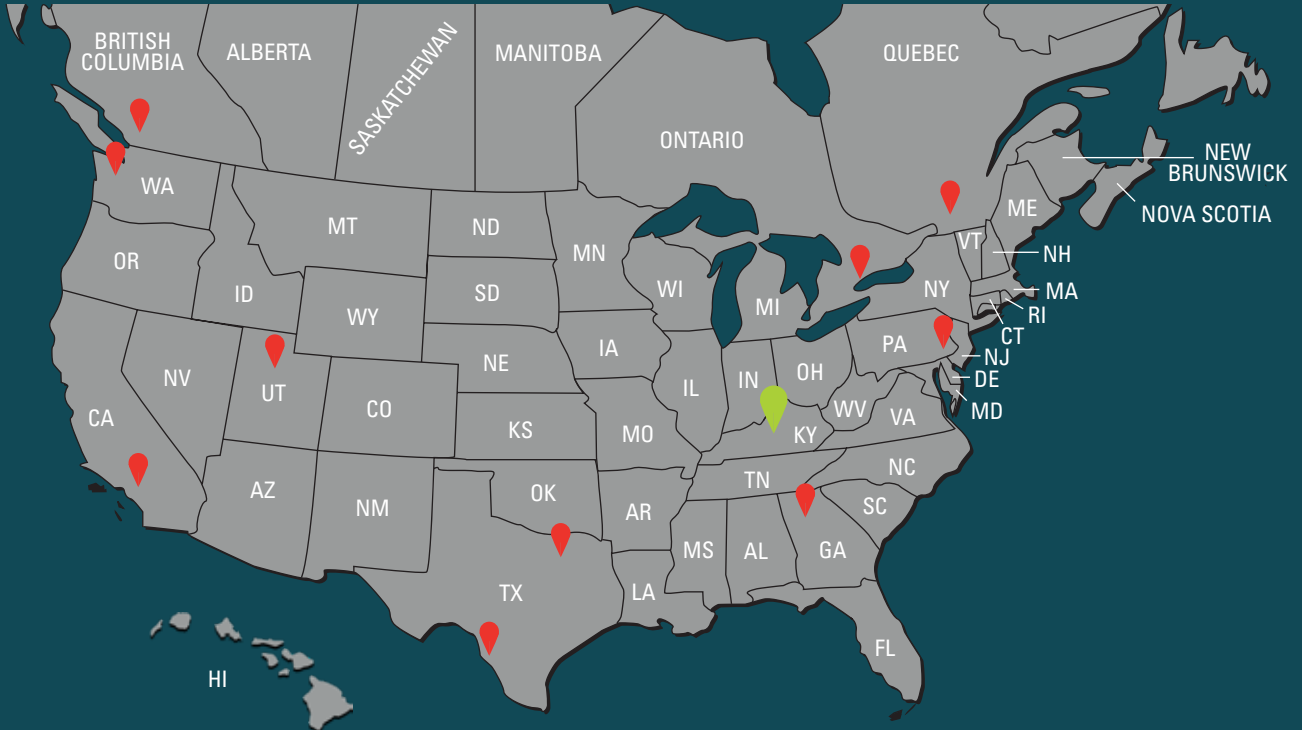

REGIONAL WAREHOUSES

BENSALEM, PA

855 Dunks Ferry Road
Bensalem, PA 19020
PHONE: (215) 638-8904

GRAND PRAIRIE, TX

801 Heinz Way
Grand Prairie, TX 75051
PHONE: (972) 602-4400

LAREDO, TX

10208 Union Pacific Blvd
Laredo, Tx, 78045
PHONE: (956) 462-0949

LOUISVILLE, KY

7765 National Turnpike, Unit 190
Louisville, KY, 40214
PHONE: (502) 636-2811

ONTARIO, CA

2050 S. Baker Ave.
Ontario, CA 91761
PHONE: (909) 941-0623

SALT LAKE CITY, UT

760 West Layton Ave.
Salt Lake City, UT 84104
PHONE: (801) 854-8949

SEATTLE, WA

920 S. Doris Street
Seattle, WA 98108
PHONE: (206) 762-4888
FAX: (206) 767-4386

TUCKER, GA

2689A Mountain Industrial Blvd.
Tucker, GA 30084
PHONE: (770) 491-1515

CANADA

QUEBEC

2001 Francis Hughes
Laval, QC H7S 2G2
PHONE: (450) 668-4610
FAX: (450) 668-4611

ONTARIO - HEAD OFFICE

100 Engelhard Drive
Aurora, ON L4G 3V2
PHONE: (800) 867-5233
USA: (888) 252-3337
FAX: (905) 727-7271

ONTARIO - WAREHOUSE

402 Mulcok Drive, Unit # 2
Newmarket, ON
L3Y 9B9
PHONE: (647)484-0425

BRITISH COLUMBIA

7205 Brown Street
Delta, BC V4G 1G5
PHONE: (604) 940-2972
FAX: (604) 940-2973



GLOBAL HEADQUARTERS AND WAREHOUSE

7765 National Turnpike, Unit 190
Louisville, KY 40214

www.louisvilleadder.com

PHONE (USA AND CANADA) 1.800.666.2811
PHONE 1.502.636.2811
FAX 1.800.274.4566



7765 National Turnpike, Unit 190
Louisville, KY 40214

www.louisvilneladder.com

PHONE (USA AND CANADA) 1.800.666.2811
PHONE 1.502.636.2811
FAX 1.800.274.4566

June 2021

IDEMCO

W : www.idemcosb.com.my
E : idemco@idemcosb.com.my
T : +6 03-7781 7973

