2023/24 (VERSION 1.0)

NEW LAUNCH FEATURES / COMING SOON

 (R)

CHEE FA



EXET OF AND YOUR LITHIUM LINE UP

NEW LAUNCH 2 Tnakita. 2023/24 (VERSION 1.0) 🛪 Wood mode **TD002G Cordless Impact Driver** 😰 Bolt mode C 3 P. 1 . . . 78 🖛 Teks screw Max fastening torque Dual spring technology TD002GZ01Cordless Impact Driver Ne 220_{N·m} Enhanced anvil holder rigidity 4 LEDs on the front of tool head Cordless Wood/Bolt/T-Mode 220 N·m (1,950 in.lbs.) Impact Driver
 Capacity- Machine screw
 M4 - M8 (5/32" - 5/16") Standard Bolt

 Standard Bolt
 M5 - M16 (3/16" - 5/8") High Strength Bolt

 M5 - M16 (3/16" - 9/16") Coarse thread (in length):

 22 - 125 mm (1/4")

 No Load Speed (RPM)

 0 - 3,700 / 3,200 / 2,100/ 1,100 / 1,800 / 2,700 / 3,700

 Impacts Per Minute (IPM)

 0 - 4,600 / 3,000 / 2,000 / 2,000 / 1,000 / 4,600

 Max Fastening Torque

 Fastening Torque

 Piand / Med / 50ft:

 Dimensions
 w/BL4025: 119x86x247mm

 Will 4050F:119x86x278mm

 Net weight
 1.7 - 29 kg (3.7 - 6.4 lbs.)
 Li-ion Ab 8.0 5.0 4.0 2.5 2.0 Increased screw tightening speed New appearance design (camouflage pattern) Multiple operation modes for a wide range of applications; 4-speed power selection plus 6 Assist modes (2 T-modes, 1 Wood mode, 3 Bolt modes) 40Vmax Belt clip, Hand strap (country-specific), Battery, Charger, Z: Battery and Charger are sold separately **AC001G Cordless Air Compressor** Low noise **68**dB(A)

- Developed mainly for interior nailing applications e.g. finish nailing with 18 Ga nail
- Portable air station for regular pressure tools
- Low noise level, yet with excellent combination of high air flow and lightweight design
- Surrounding environment-friendly machine with low noise level
- Lightweight design for increased job site portability







AC001GZ Cordless Air Compressor

Developed mainly for interior nailing applications e.g. finish nailing with 18 Ga nail Tank

Li-ion Ah 8.0 5.0 4.0 2.5 2.0

ECT BL Z: Battery and Charger are sold separately

Cut-In Pressure Cut-Out Pressure Number of Outlets Performance Noise Level Dimensions (L x W x H) Net weight

7.6 L (2 gal) 0.72 MPa (105 PSI) 0.93 MPa (135 PSI) , 34.0 L/min 68 dB(A) 302×434×382 mm (11-7/8" ×17-1/8" ×15") 11.6 - 12.8 kg (25.6 - 28.2 lbs.)

New

40Vmax





- Built-in LED light with preglow and afterglow functions
- With 3-mode operation for "Rotation Only", "Hammering with Rotation" or "Hammering Only"
- AVT reduces load during continuous drilling operations
- Compatible with compact and lightweight new dust collection system DX16



40Vmax XGT BL AWS AVT Cordless 20 mm (13/16") Combination Hammer, SDS-PLUS

Li-ion Ab 5.0 4.0 2.5 2.0

Impact Energy EPTA-Procedure 05/2009:2.0 J Capacity Concrete (w/TCT bit)/ Steel/Wood: 20mm/13mm/26mm Blows Per Minute (BPM) 0-1,510 Dimensions w/BL402/BL4025: (Lx W x H) 289 x93x 217 mm w/ BL4040: 304 x93x 223 mm w/ BL4050F: 323 x93x 244 mm

2.9 - 4.5 kg (6.4 - 9.9 lbs.)

Net weight





- 10 mm J Wire Stapler
- Improvement in continuous operation achieved by BL motor and 40Vmax XGT Li-Ion battery
- Contact arm mechanism enables "continuous nailing" and "drag nailing"
- Able to drive max 25 mm staple leg
- Low reaction force mechanism enables easier nailing without pressing down the tool body
- IP56-rated dust and showerproof construction



Nose adapter, Belt clip, Battery, Charger, Z: Battery and Charger are sold separately





- New housing structure provides high rotation speed similar to that of corded models
- Anti-vibration construction
- Active Feedback sensing Technology (AFT) turns the motor off if rotation speed suddenly slows or wheel is forced to stop
- Constant speed control automatically applies additional power to the motor to maintain speed under load
- Electric brake for maximum productivity







Depressed center wheel, Cutting wheel cover attachment, Toolless wheel cover, Side grip or Vibration proof grip (country-specific), Lock nut wrench, Battery, Charger, Z: Battery and Charger are sold separately



40Vmax 🗐 🖗 🎑 📶 🐼 🖅 🙈 🖉 🏹


Depressed center wheel, Cutting wheel cover attachment, Toolless wheel cover, Side grip or Vibration proof grip (country-specific), Lock nut wrench, Battery, Charger, Z: Battery and Charger are sold separately







- Provide excellent combination of high power and good maneuverability
- Auto-start Wireless System (AWS)
- Magnesium diecast base: Base plate, Safety cover and Blade case
- Metal guide for cutting line
- Easy-to-operate Lock-off button minimizes accidental start up
- Positive bevel stop (at 22.5° and 45°)
- Twin LED lights with preglow and afterglow functions



(0° - right: 50°)



TCT saw blade, Guide rule, Dust nozzle, Hex wrench, Battery, Charger, Z: Battery and Charger are sold separately



- 2-speed gearing and variable speed control
- BL motor provides output power similar or superior to corded models in the same class
- Mixing speed selectable according to a variety of material
- Battery cover minimizes the chance that spattered material might adhere to battery
- Screw-in type shaft holder
- Switch cover and Battery cover









40Vmax 🖗 🛛 🎑 🔬 🔊 😹 XPT

Mixing blade, Shaft (country-specific), Shaft holder (country-specific), Wrenches (country-specific), Battery, Charger, Z: Battery and Charger are sold separately

New

NEW LAUNCH 2023/24 (VERSION 1.0)

6





- 40Vmax XGT Li-Ion battery (two in parallel or one)
- 3 spraying speed modes for a wider range of applications
- Switch Interlocking Valve
- Continuous run time on a full battery charge: 22 minutes (Battery: BL4080F x2 High spraying speed mode)
- ULV compatibility
- Wet Guard/IPX4-compatible








- Loop handle with good tool weight balance
- As easy-to-use as 23 mL class engine grass trimmers
- Single speed trigger switch + Electric 3 speed settings by button
- ADT (Automatic torque Drive Technology)
- Active Feedback sensing Technology (AFT) for kickback brake
- Grass tangle removing function
- Operation mode can be selected to suit the type of blade










Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ by the type of battery.



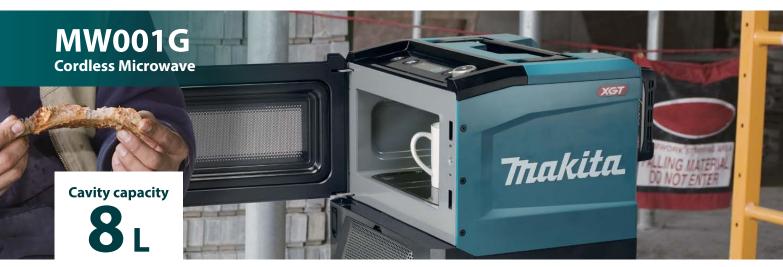

- Powered by 40Vmax XGT Li-Ion battery (two in parallel or one) or Portable power pack PDC1200
- Excellent portability
- Can heat food at 500 W* as well as corded domestic microwave
- Tempered door glass
- Reminder beep for items left in the microwave
- Popular size food container can be heated





40Vmax

Z: Battery and Charger are sold separately

 Useful cavity dimensions
 255 x 241 x 120 mm

 (W x D x H)
 (10 x 9-1/2 x 4-3/4")

 Cavity capacity
 8 L

 Microwave power
 High / Low: 500 / 350 W

 Operating frequency
 2,450 MHz

 Continuous run time on
 w/BL4020 x2: 11 / 6 min.,

 full battery charge
 w/BL4040 x2: 21 / 15 min.,

 (350 / 500 W)
 w/BL4040 x2: 30 / 22 min.,

 w/BL4080F x2: 84 / 35 min.,
 w/BL4080F x2: 84 / 35 min.,

Dimensions (L x W x H) Net weight

w/ PDC1200: 113 / 84 min. s w/o Battery: 318 x 343 x 338 mm (12-1/2 x 13-1/2 x 13-1/4")

w/o Battery: 8.9 kg (19.6 lbs.)

New



- 76mm (3") cutter suitable for small cutting jobs
- Developed mainly for automotive repair shops, plumbing traders and air conditioning equipment suppliers
- Single LED job light with afterglow function
- BL motor with high power to weight and size ratio
- Active Feedback sensing Technology for kickback reduction
- Lock-off function prevents accidental start up
- Reversing switch is conveniently located







DMC300RTJ / Z Cordless Compact C	ut Off	New
18V LXT BL AFT Cordless 76 mm (3") Co	mpact Cut Off	
Li-ion (60.5.0.3.0.1.5)	Blade Diameter No Load Speed (RPM) Max cutting capacity	76 mm (3") 20,000 w/ Dust cover attachment: 13.5 mm (1/2") w/o Dust cover attach- ment: 16.0 mm (5/8")
	Dimensions (L x W x H)	w/BL1830B/BL1850B/ BL1860B: 271 x 104 x 182 mm (10-5/8 x 4-1/8 x 7-1/8")
	Net weight	1.2 - 1.7 kg (2.6 - 3.7 lbs.)

18V @@@@KID IXI ## AFT @ XPT

Dust Collection Cover, Diamond Wheel, Hex Wrench, Battery, Charger Z: Battery and Charger are sold separately **NEW LAUNCH** 2023/24 (VERSION 1.0)

8







DML817 Cordless Worklight

Li-ion Ab 6.0 5.0 3.0 1.5

18V/14.4V LXT Li-Ion Cordless Worklight, 300 Lumens

makita

- Compact light with USB output port for a variety of uses
- 3 lighting modes can be selected: Sidelighting + Uplighting / Sidelighting only / Uplighting only
- Supplied with Warm white lamp shade
- USB output port: 1 port (Type A for DC5V/2.4A)
- With mode memory function
- Also can be used for downlighting

Illuminance

Luminous flux

Run time (hrs)

Dimensions (LxWxH) Net weight

source)

(at 0.5 m from the light





<u>lxt</u> usb Warm color cover, Battery and Charger are sold separately

18V 14.4V

New

Sidelighting + Uplighting / Sidelighting

only / Uplighting only: 240 / 190 / 190 lx

Sidelighting + Uplighting / Sidelighting only / Uplighting only: 300 / 150 / 150 Im w/ BL1860B, at 300 Im:

28, w/ BL1860B, at 150 lm: 49

w/o Battery: 107 x 77 x 50 mm

0.21 kg (0.46 lbs.)





Suction power 15W/35W/60W/100W 543 x 113 x 177 mm Dimensions (LxWxH) (21-3/8 x 4-7/16 x 7") 1.6 - 1.9 kg (3.5 - 4.2 lbs.) Net weight

18V 4 ID LXT BL

Thakita

Floor nozzle, Sash nozzle, Sash nozzle holder, Pipe, Battery, Charger, High performance filter (country-specific), Z: Battery and Charger are sold separately

DCL284FRTB / FZB Cordless Cleaner New 18V LXT BL Cordless 4-Speed Cleaner with LED Light Li-ion Ah 6.0 5.0 3.0 1.5 Capacity 730 mL Max Air Flow 1.2 m³/min Max Sealed Suction 18 kPa w/ High performance Suction power filter, Mode 1/2/3/4: 20W/ 45W/ 70W/ 125W 503 x 113 x 153 mm Dimensions (LxWxH) (19-3/4 x 4-7/16 x 6-1/16") Net weight 1.3 - 1.6 kg (2.9 - 3.5 lbs.)

18V

Floor nozzle, Sash nozzle, Sash nozzle holder, Pipe, High performance filter, Battery, Charger, Z: Battery and Charger are sold separately

Dimensions (L x W x H) Net weight 1.3 - 1.6 kg (2.9 - 3.5 lbs.)

18V IID) <u>LXT</u> **B**L

Floor nozzle, Sash nozzle holder, Pipe, High performance dust bag, Battery, Charger, Z: Battery and Charger are sold separately

Redesigned Floor/ Carpet T-nozzle





- Powered by 18V battery
- Quiet cleaning achieved by redesigning the exhaust air flow path of the motor to reduce wind noise
- High-speed BL motor optimal for cordless handy cleaner
- Pipe is fixed by the locking mechanism to minimize it from accidentally coming off
- Cleaning of tight places can be done without nozzle by using the beveled end of pipe as a nozzle
- Sash nozzle for cleaning corners and crevices of a car or furniture





Excellent drilling capacity with up to 1" ship auger bit in high speed mode

Twin LED job light **Mechanical 2-speed** 13 mm (1/2") 110 N·m (970 in.lbs.) Excellent drilling capacity: Drilling in 2x lumber with up to 1" ship Thakita auger bit in high speed mode Metal gear housing with preglow and Convenient 13 mm (1/2") keyless afterglow functions Robust keyless chuck for quick bit changes drill chuck 21 clutch settings and drill mode with single metal Variable speed for added fastening control sleeve control by trigger Mechanical 2-speed gearing 0 - 27,000 IPM for fast hammer **Max Lock Torque** drilling in masonry materials 80_{N·m} (DHP489 only) photo: DHP489 DHP489RTJ / Z 13mm (1/2") Cordless Hammer Driver Drill DDF489RTJ / Z 13mm (1/2") Cordless Driver Drill New New 18V LXT BL Cordless 13 mm (1/2") 110 N·m (970 in.lbs.) Driver Drill 18V LXT BL Cordless 13 mm (1/2") 110 N·m (970 in.lbs.) Hammer Driver Drill Li-ion Ah 6.0 5.0 3.0 1.5 Steel: 13 mm (1/2"), Wood Steel: 13 mm (1/2"), Wood Capacity Li-ion Ab 6.0 5.0 3.0 1.5 Capacity (Auger-Bit): 38 mm (1-1/2"), Masonry: 16 mm (5/8"), Siding Board: 70 mm (2-3/4") Wood (Auger-Bit): 38 mm (1-1/2"), Wood (Self-Feed Bit): 51 mm (2"), Wood (Hole Saw): 51 mm (2"), Siding Chuck capacity Impacts Per Minute (IPM) 1.5 - 13 mm (1/16 - 1/2") Board: 70 mm (2-3/4") 1.5 - 13 mm (1/16 - 1/2") High/Low: 0-27,000/0-8,250 Chuck capacity No Load Speed (RPM) High/Low: No Load Speed (RPM) High/Low: 0-1,800/0-550 Hard/Soft: 73/40 N·m 0-1,800/0-550 Max Fastenina Toraue Max Fastening Torque Max lock torque Hard/Soft: 73/40 N·m 80 N·m (700 in.lbs.)w/ BL1830B / BL1850B / Max lock torque 80 N·m (700 in.lbs.)w/ Dimensions w/BL1830B/BL1850B/ BL1860B: 175 x 81 x 261 mm 1.8 - 2.5 kg (4.0 - 5.5 lbs.) Dimensions (L x W x H) Net weight $(L \times W \times H)$ BL1860B: 174 x 81 x 261 mm Net weight 1.8 - 2.5 kg (4.0 - 5.5 lbs.) 18V 18V \$\$ © ₩ 2 m 10 ID

Belt clip, (+)(-) Bit, Battery, Charger, Z: Battery and Charger are sold separately




Belt clip, (+)(-) Bit, Battery, Charger, Z: Battery and Charger are sold separately





- 64Vmax Li-lon battery and new Outer Rotor BL motor enable high-power operation New steel cutting deck
- 3 Cutting mode selection
- Cutting/Collecting/Mulching/Rear discharge/Side discharge*1 (*1 Country-specific)
- Self-propelled function with a speed range of 1.5-6.5 km/h
- IPX4-rated water-resistance
- One hand cutting height adjustment (20-100 mm (10 stages))



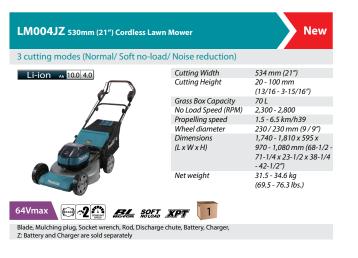



- 12Vmax CXT BL Cordless Pruning Shears
- Shear blade control is interlocked with Trigger for easier control of the blade
- Two control buttons on the tool body
- The use of BL Coreless motor allows for reduction in the grip diameter and weight to reduce user's fatigue from pruning
- Adjustment of blade overlap when closed
- External oil port







UP100DZ Cordless Pruning Shears Shear blade control is interlocked with Trigger for easier control of the blade Li-ion 4.0 2.0 1.5 Capacity Vibration level



Net weight

Max cutting: 25 mm (1")
2.5 m/s2 or less
70 dB(A) or less
w/o Battery:
259 x 53 x 98 mm
(10-1/4 x 2-1/16 x 3-7/8")
w/BL1016/BL1021B:
285 x 64 x 98 mm
(11-1/4 x 2-1/2 x 3-7/8")
w/BL1041B:
308 x 64 x 98 mm
(12-1/8 x 2-1/2 x 3-7/8")
0.89 - 1.1 kg
(2.0 - 2.4 lbs.)

New

12Vmax CXI BL XPT

Oil spray, Hex wrench, Socket wrench, Dressing stone, Holster, Battery, Charger, DZ: Battery and Charger are sold separately

NEW LAUNCH 2023/24 (VERSION 1.0)

Tnakita

PF400MP (A-75384)

Pump Attachment

Strainer (with 4mm diameter holes)



Compatible models: UX01G, DUX60, DUX18



- Pump attachment designed to be compatible with cordless multi function power heads
- Can be used for water pumping-up, draining or sprinkling at a wide range of work sites including irrigation, construction and more
- Lowest water level for starting operation: 20 mm
- Lowest residual water level: 10 mm
- Max flow rate: 135 L/min

UB402MP (1912S0-7)

Blower Attachment

3 stages adjustment



Compatible models: UX01G, DUX60, DUX18



- Compact and lightweight, making it easy for even senior citizens or women to use.
- Nozzle mounting diameter: ø75mm
- Nozzle tip diameter: ø58mm is reduced to provide enough air speed to blowdry fallen leaves or grass clippings.
- With Telescopic nozzle, length can be adjusted in 3 stages by 50mm according to user's operating environment

- EN424MP (1912V6-6) Ground Trimmer Attachment
- Compatible models: UX01G, DUX60, DUX18



- Use of hedge trimmer type blade reduces the flying distance and speed of stones and debris
- Trimming can be done without swinging blade.
- Curved tooth with 3 sharpened edges
- Metal under plate allows user to do trimming while sliding
- this attachment on the ground because it is made of sheet metal, which is more resistant to abrasion than the plastic one of Competitor E

E-19788

T.C.T Efficut Metal Saw Blade

- More cuts per charge compared to standard blades
- Faster cutting compared to standard blades
- High efficiency and long life for stationary metal cutting saw
- Mainly for metal and stainless steel with an enhanced tip shape to improve cutting and durability for 12" Metal Cutter



Metal 7

D-77257 Wood Brad Point Drill Bit

- Available size 3mm, 4mm, 5mm, 6mm, 7mm, 8mm, 9mm, 10mm
- Brad point drill bit is the most popular drill in wood drill
- Suitable for drilling small to medium diameter
- Able to drill soft plastics other than general wood





Visit us at: www.makita.com.sg



W: www.cheefatt.com E : marketing@cheefatt.com T : +65 6294 2066

