







Dual spring technology

Enhanced anvil holder rigidity

■ 4 LEDs on the front of tool head

- Increased screw tightening speed
- New appearance design (camouflage pattern)
- Multiple operation modes for a wide range of applications; 4-speed power selection plus 6 Assist modes (2 T-modes, 1 Wood mode, 3 Bolt modes)







fastening torque

220_{N·m}

TD002GZ01Cordless Impact Driver

Cordless Wood/Bolt/T-Mode 220 N·m (1,950 in.lbs.) Impact Driver

Li-ion Ab 8.0 5.0 4.0 2.5 2.0

Capacity- Machine screw M4-M8 (5/32"-5/16") Standard Bolt M5-M16 (3/16"-5/8") High Strength Bolt M5-M14 (3/16"-9/16") Coarse thread (in length): 22-125 mm (1/4") No Load Speed (RPM) -0.3700/3,200/2,100/1,100/1,800/2,700/3,700 (Impacts Per Minute (IPM) -0.4600/3,500/2,500/1,000/4,600/N/A /4,600 Max Fastening Torque Fastening Torque Fastening Torque Hard /Med/Soft: 170/50/20 Nm Dimensions (Lx Wx H) WBL4025: 119x86x247mm McLx Wx H) WBL4025: 119x86x278mm Net weight 1.7-29 kg (3.7-6.4 lbs.)

MODA DE XPT

Belt clip, Hand strap (country-specific), Battery, Charger, Z: Battery and Charger are sold separately

AC001G Cordless Air Compressor

Low noise **68** dB(A)

- Developed mainly for interior nailing applications e.g. finish nailing with 18 Ga nail
- Portable air station for regular pressure tools
- Low noise level, yet with excellent combination of high air flow and lightweight design
- Surrounding environment-friendly machine with low noise
- Lightweight design for increased job site portability







ACOO1GZ Cordless Air Compressor

Developed mainly for interior nailing applications e.g. finish nailing with 18 Ga nail





7.6 L (2 gal) 0.72 MPa (105 PSI) 0.93 MPa (135 PSI) Tank Cut-In Pressure Cut-Out Pressure Number of Outlets 34.0 L/min Performance Noise Level 302×434×382 mm Dimensions (11-7/8"×17-1/8" ×15") 11.6 - 12.8 kg (LxWxH) Net weight (25.6 - 28.2 lbs.)

Z: Battery and Charger are sold separately

Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ by the type of battery.

HR010G

Cordless Combination Hammer





- Maximum drilling capacity of 20 mm
- Drilling speed about 2.3 times compared to 18V model
- Built-in LED light with preglow and afterglow functions
- With 3-mode operation for "Rotation Only", "Hammering with Rotation" or "Hammering Only"
- AVT reduces load during continuous drilling operations
- Compatible with compact and lightweight new dust collection system DX16







HR010GD201(RD2J) / GZ 20mm (13/16") Cordless Combination Hammer

40Vmax XGT BL AWS AVT Cordless 20 mm (13/16") Combination Hammer, SDS-PLUS

Li-ion Ah 5.0 4.0 2.5 2.0



Impact Energy EPTA-Procedure 05/2009: 2.0 J Concrete (w/TCT bit)/ Steel/Wood: 20mm/13mm/26mm Blows Per Minute (BPM) 0-5,000

No Load Speed (RPM) Dimensions 0-1.510 w/BL4020/BL4025: (LxWxH) 289 x 93 x 217 mm w/BL4040: 304 x 93 x 223 mm 323 x 93 x 244 mm 2.9-4.5 kg (6.4-9.9 lbs.)





Side grip, Depth gauge, Battery, Charger, Z: Battery and Charger are sold separately

ST002G Cordless Stapler Superior in work volume on a single full battery charge



- 10 mm J Wire Stapler
- Improvement in continuous operation achieved by BL motor and 40Vmax XGT Li-lon battery
- Contact arm mechanism enables "continuous nailing" and "drag nailing"
- Able to drive max 25 mm staple
- Low reaction force mechanism enables easier nailing without pressing down the tool body
- IP56-rated dust and showerproof construction

ST002GZ Cordless Stapler

40Vmax XGT Cordless 10 mm J Wire Stapler





Width: 10 mm Staple Length: 13 - 25 mm Size: 1.2 x 0.6 mm 100

Magazine capacity Shot q'ty on a single full battery charge w/BL4025: 6,000 w/BL4025:

269 x 86 x 216 mm (LxWxH) (10-5/8"x3-3/8"x8-1/2") 2.5 - 3.7 kg (5.7 - 8.2 lbs.) Net weight







Nose adapter, Belt clip, Battery, Charger, Z: Battery and Charger are sold separately



- New housing structure provides high rotation speed similar to that of corded models
- Anti-vibration construction
- Active Feedback sensing Technology (AFT) turns the motor off if rotation speed suddenly slows or wheel is forced to stop
- Constant speed control automatically applies additional power to the motor to maintain speed under load
- Electric brake for maximum productivity







GA048GZ 100mm (4") Cordless Angle Grinder

40Vmax Cordless Angle Grinder, Anti-Restart Function, Electric Brake, Paddle Switch

Li-ion Ah 5.0 4.0 2.5 2.0



100 mm (4") Wheel Diameter 16 mm (5/8") Hole Diameter No Load Speed (RPM) 11,000 w/BL4025: Dimensions (L x W x H) 398 x 117 x 156 mm (15-5/8 x 4-5/8 x 6-1/8") w/BL4050F: 436 x 117 x 185 mm (17-1/8 x 4-5/8 x 7-1/4") 2.8 - 5.2 kg (6.2 - 11.5 lbs.) Net weight





Depressed center wheel, Cutting wheel cover attachment, Toolless wheel cover, Side grip or Vibration proof grip (country-specific), Lock nut wrench, Battery, Charger, Z: Battery and Charger are sold separately

GA050GZ 125mm (5") Cordless Angle Grinder

40Vmax Cordless Angle Grinder, Anti-Restart Function, Electric Brake, Paddle Switch

Li-ion Ah 8.0 5.0 4.0 2.5 2.0



Wheel Diameter 125 mm (5") Hole Diameter 22.23 mm (7/8") No Load Speed (RPM) Dimensions (L x W x H)

11.000 w/BL4025: 398 x 140 x 156 mm (15-5/8 x 5-1/2 x 6-1/8") w/BL4050F: 436 x 140 x 185 mm (17-1/8 x 5-1/2 x 7-1/4") 3.0 - 5.4 kg (6.6 - 11.9 lbs.) GA051GZ

150mm (6") Cordless Angle Grinder

Li-ion Ah 8.0 5.0 4.0 2.5 2.0

40Vmax Cordless Angle Grinder, Anti-Restart Function, Electric Brake, Paddle Switch Wheel Diameter 150 mm (6")

No Load Speed (RPM)


22.23 mm (7/8″) 9.000 w/BL4025 398 x 171 x 156 mm (15-5/8 x 6-3/4 x 6-1/8") w/BL4050F: 436 x 171 x 185 mm (17-1/8 x 6-3/4 x 7-1/4") 3.1 - 4.7 kg (6.8 - 10.4 lbs.)

New





Net weight









Net weight

Depressed center wheel, Cutting wheel cover attachment, Toolless wheel cover, Side grip or Vibration proof grip (country-specific), Lock nut wrench, Battery, Charger, Z: Battery and Charger are sold separately



- Provide excellent combination of high power and good maneuverability
- Auto-start Wireless System (AWS)
- Magnesium diecast base: Base plate, Safety cover and Blade case
- Metal guide for cutting line
- Easy-to-operate Lock-off button minimizes accidental start up
- Positive bevel stop (at 22.5° and 45°)
- Twin LED lights with preglow and afterglow functions





HS012GZ 165mm (6-1/2") Cordless Circular Saw

40Vmax XGT BL AWS Cordless Circular Saw, Electric Brake, Soft Start, Twin LED Light

Li-ion Ab 8.0 5.0 4.0 2.5 2.0

Hole Diameter Max Cutting Capacity No Load Speed (RPM)

Wheel Diameter

0°: 57 mm (2-1/4") 45°: 41 mm (1-5/8") 5,200 w/BL4020/BL4025: 352 x 157 x 246 mm (13-7/8 x 6-3/16 x 9-11/16") w/BL4040: 359 x 157 x 246 mm (14-9/64 x 6-3/16 x 9-11/16") w/ BL4080F: 406 x 157 w/ bL4060r. 406 x 13/ x 246 mm (15-63/64 x 6-3/16 x 9-11/16") 3.2 - 4.4 kg (7.1 - 9.7 lbs.)

165 mm (6-1/2") 20 mm (13/16")

(LxWxH)



TCT saw blade, Guide rule, Dust nozzle, Hex wrench, Battery, Charger,

makita **UT001G Cordless Mixer** Maximum **Work Speed Blade Diameter** mm

- 2-speed gearing and variable speed control
- BL motor provides output power similar or superior to corded models in the same class
- Mixing speed selectable according to a variety of material
- Battery cover minimizes the chance that spattered material might adhere to battery
- Screw-in type shaft holder
- Switch cover and Battery cover







UT001GZ Cordless Mixer

Li-ion Ah 8.0 5.0 4.0 2.5 2.0

40Vmax XGT BL Cordless 240 mm (9-1/2") Variable 2-Speed Mixer Blade Diameter 240 mm (9-1/2") High / Low: 0 - 920 / 0 - 500 No Load Speed (RPM) Max Output 1,200 W w/Cover S, w/BL4020/ Dimensions (L x W x H) BL4025 / BL4040: 373 x 458 x 235 mm (14-3/4 x 18 x 9-1/4") 5.7 - 7.0 kg (12.6 - 15.4 lbs.)

Net Weiaht

M Q A A APT

Mixing blade, Shaft (country-specific), Shaft holder (country-specific), Wrenches (country-specific), Battery, Charger, Z: Battery and Charger are sold separately

40Vmax



- 40Vmax XGT Li-Ion battery (two in parallel or one)
- 3 spraying speed modes for a wider range of applications
- Switch Interlocking Valve
- Continuous run time on a full battery charge: 22 minutes (Battery: BL4080F x2 High spraying speed mode)
- ULV compatibility
- Wet Guard/IPX4-compatible









- Loop handle with good tool weight balance
- As easy-to-use as 23 mL class engine grass trimmers
- Single speed trigger switch + Electric 3 speed settings by button
- ADT (Automatic torque Drive Technology)
- Active Feedback sensing Technology (AFT) for kickback brake
- Grass tangle removing function
- Operation mode can be selected to suit the type of blade













- Powered by 40Vmax XGT Li-lon battery (two in parallel or one) or Portable power pack PDC1200
- Excellent portability
- Can heat food at 500 W* as well as corded domestic microwave
- Tempered door glass
- Reminder beep for items left in the microwave
- Popular size food container can be heated







MW001GZ Cordless Microwave

Excellent portability

Li-ion Ah 8.0 5.0 4.0 2.5 2.0



X

Z: Battery and Charger are sold separately

Useful cavity dimensions (WxDxH) (10 x 9-1/2 x 4-3/4") Cavity capacity High / Low: 500 / 350 W Microwave power Operating frequency
Continuous run time on 2,450 MHz w/BL4020 x2: 11 / 6 min., full battery charge (350/500 W) w/BL4025 x2: 14 / 8 min., w/BL4040 x2: 21 / 15 min., w/BL4050Fx2:30/22 min., w/BL4080F x2: 48 / 35 min., w/PDC1200: 113/84 min. Dimensions (LxWxH) w/o Battery: 318 x 343 x 338 mm (12-1/2 x 13-1/2 x 13-1/4") Net weight w/o Battery: 8.9 kg (19.6 lbs.)



- 76mm (3") cutter suitable for small cutting jobs
- Developed mainly for automotive repair shops, plumbing traders and air conditioning equipment suppliers
- Single LED job light with afterglow function
- BL motor with high power to weight and size ratio
- Active Feedback sensing Technology for kickback reduction
- Lock-off function prevents accidental start up
- Reversing switch is conveniently located







DMC300RTJ / Z Cordless Compact Cut Off

18V LXT BL AFT Cordless 76 mm (3") Compact Cut Off

Li-ion Ah 6.0 5.0 3.0 1.5



Blade Diameter No Load Speed (RPM) Max cutting capacity

Dimensions

271 x 104 x 182 mm (10-5/8 x 4-1/8 x 7-1/8") Net weight 1.2 - 1.7 kg (2.6 - 3.7 lbs.)

76 mm (3")

BL1860B:

13.5 mm (1/2") w/o Dust cover attach-ment: 16.0 mm (5/8")

w/Dust cover attachment:

w/BL1830B/BL1850B/

20,000

© \\ \text{\tin\text{\texi}\tint{\text{\text{\text{\text{\text{\text{\text{\text{\text{\text{\text{\text{\t





Dust Collection Cover, Diamond Wheel, Hex Wrench, Battery, Charger Z: Battery and Charger are sold separately





ML107 Cordless Worklight

ML107 92 mm ML011G/DML817 107 mm





- Compact light with USB output port for a variety of
- 3 lighting modes can be selected: Sidelighting + Uplighting / Sidelighting only / Uplighting only
- Supplied with Warm white lamp shade
- USB output port: 1 port (Type A for DC5V/2.4A)
- With mode memory function
- Also can be used for downlighting

ML011G Cordless Worklight

40Vmax XGT Li-lon Cordless Worklight, 300 Lumens

Li-ion Ah 5.0 4.0 2.5 2.0



Illuminance (at 0.5 m from the light source)

Luminous flux

Sidelighting + Uplighting / Sidelighting only / Uplighting only: 240 / 190 / 190 lx Sidelighting + Uplighting / Sidelighting only / Uplighting only 300 / 150 / 150 lm w/BL4040, at 300 lm: 37, w/BL4040,

New

Run time (hrs) Dimensions

(LxWxH) Net weight

at 150 lm: 64 w/o Battery: 107 x 77 x 50 mm 0.19 kg (0.42 lbs.)

40Vmax

New

€X∰ USB

Warm color cover, Battery and Charger are sold separately

DML817 Cordless Worklight

18V/14.4V LXT Li-lon Cordless Worklight, 300 Lumens



Li-ion Ah 6.0 5.0 3.0 1.5



Sidelighting + Uplighting / Sidelighting Illuminance (at 0.5 m from the light only/Uplighting only: 240/190/190 lx source) Luminous flux

Net weight

240/190/1901X Sidelighting + Uplighting / Sidelighting only / Uplighting only: 300/150/150 lm w/BL1860B, at 300 lm: Run time (hrs) 28, w/BL1860B, at 150 lm: 49 w/o Battery: 107 x 77 x 50 mm (LxWxH)

0.21 kg (0.46 lbs.)

18V 14.4V

LXT USB

Warm color cover, Battery and Charger are sold separately

ML107 Cordless Worklight

12Vmax CXT Li-lon Cordless Worklight, 200 Lumens

Li-ion Ah 4.0 2.0 1.5



Illuminance (at 0.5 m from the light source)

Luminous flux

Run time (hrs)

only/Uplighting only: 175/130/130 lx 1737 1307 1301X Sidelighting + Uplighting / Sidelighting only / Uplighting only: 200 / 100 / 100 lm w/BL1041B, at 300lm: 17, w/BL1041B, at 150lm: 29

Sidelighting + Uplighting / Sidelighting

Dimensions (LxWxH)

w/o Battery: 92 x 54 x 47 mm 0.29 kg (0.13 lbs.)

CXT USB

Warm color cover, Battery and Charger are sold separately





DCL286FRTB / FZB Cordless Cleaner

New

18V LXT BL Cordless 4-Speed Cleaner with LED Light



Dust collecting type	Cyclone
Capacity	250 mL
Max Air Flow	1.0 m³/min
Max Sealed Suction	18 kPa
Suction power	w/High performance
	filter, Mode 1/2/3/4:
	15W/35W/60W/100W
Dimensions	543 x 113 x 177 mm
(LxWxH)	(21-3/8 x 4-7/16 x 7")
Net weight	1.6 - 1.9 kg (3.5 - 4.2 lbs.)
-	-

4 ID LXT BL

Floor nozzle, Sash nozzle, Sash nozzle holder, Pipe, Battery, Charger, High performance filter (country-specific), Z: Battery and Charger are sold separately

DCL283FRTB / FZB Cordless Cleaner

18V LXT BL Cordless Cleaner with LED Light



	Capacity	730 mL
	Max Air Flow	1.1 m³/min
	Max Sealed Suction	17.5 kPa
	Suction power	90 W
	Dimensions	503 x 113 x 154 mm
	(LxWxH)	(19-3/4 x 4-7/16 x 6-1/8'
	Net weight	1.3 - 1.6 kg (2.9 - 3.5 lbs.)





Floor nozzle, Sash nozzle, Sash nozzle holder, Pipe, High performance dust bag, Battery, Charger, Z: Battery and Charger are sold separately

DCL284FRTB / FZB Cordless Cleaner

18V LXT BL Cordless 4-Speed Cleaner with LED Light



•	
Capacity	730 mL
Max Air Flow	1.2 m³/min
Max Sealed Suction	18 kPa
Suction power	w/ High performance
	filter, Mode 1/2/3/4:
	20W/45W/70W/125W
Dimensions	503 x 113 x 153 mm
(LxWxH)	(19-3/4 x 4-7/16 x
	6-1/16")
Net weight	1.3 - 1.6 kg (2.9 - 3.5 lbs.)

4 D LXT BL

Floor nozzle, Sash nozzle, Sash nozzle holder, Pipe, High performance filter, Battery, Charger, Z: Battery and Charger are sold separately








- Powered by 18V battery
- Quiet cleaning achieved by redesigning the exhaust air flow path of the motor to reduce wind noise
- High-speed BL motor optimal for cordless handy cleaner
- Pipe is fixed by the locking mechanism to minimize it from accidentally coming off
- Cleaning of tight places can be done without nozzle by using the beveled end of pipe as a nozzle
- Sash nozzle for cleaning corners and crevices of a car or furniture



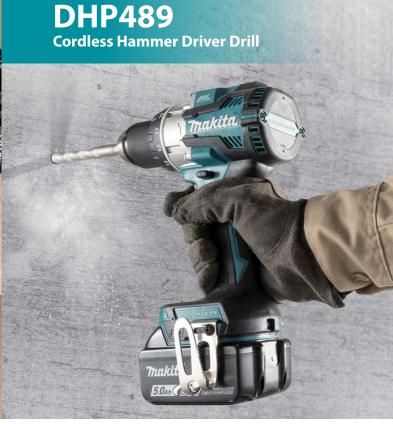

Excellent drilling capacity with up to 1" ship auger bit in high speed mode

Mechanical 2-speed



Max Lock Torque

80 N·m



Twin LED job light



with preglow and afterglow functions

Variable speed control by trigger



- 13 mm (1/2") 110 N·m (970 in.lbs.)
- Excellent drilling capacity: Drilling in 2x lumber with up to 1" ship auger bit in high speed mode
- Metal gear housing
- Convenient 13 mm (1/2") keyless chuck for quick bit changes
- 21 clutch settings and drill mode for added fastening control
- Mechanical 2-speed gearing
- 0 27,000 IPM for fast hammer drilling in masonry materials (DHP489 only)

DDF489RTJ / Z 13mm (1/2") Cordless Driver Drill

New

18V LXT BL Cordless 13 mm (1/2") 110 N·m (970 in.lbs.) Driver Drill



Capacity

Chuck capacity
No Load Speed (RPM)

Max Fastening Torque Max lock torque Dimensions (L×W×H) Net weight Steel: 13 mm (1/2"), Wood Wood (Auger-Bit): 38 mm (1-1/2"), Wood (Self-Feed Bit): 51 mm (2"), Wood (Hole Saw): 51 mm (2"), Siding Board: 70 mm (2-3/4") 1.5-13 mm (1/16-1/2") High/Low: 0-1,800/0-550 Hard/ Soft: 73/40 N-m 80 N-m (700 in.lbs.)w/ BL 1830B / BL 1850B /

BL 1860B: 174 x 81 x 261 mm 1.8 - 2.5 kg (4.0 - 5.5 lbs.)

Belt clip, (+)(-) Bit, Battery, Charger, Z: Battery and Charger are sold separately

DHP489RTJ / Z 13mm (1/2") Cordless Hammer Driver Drill

New

18V LXT BL Cordless 13 mm (1/2") 110 N·m (970 in.lbs.) Hammer Driver Drill



Capacity

Chuck capacity Impacts Per Minute (IPM) No Load Speed (RPM)

Max Fastening Torque Max lock torque Dimensions (L x W x H) Net weight (Auger-Bith: 38 mm (1-1/2"), Masonry: 16 mm (5/8"), Siding Board: 70 mm (2-3/4")
1.5 - 13 mm (1/16 - 1/2")
) High/Low:
0 - 27,000/0 - 8,250
High / Low:

Steel: 13 mm (1/2"), Wood

0-27,000/0-8,250 High/Low: 0-1,800/0-550 Hard/Soft: 73/40 N-m 80 N-m (700 in.lbs.)w/ w/BL1830B BL1850B / BL1860B: 175 x 81 x 261 mm 1.8 - 2.5 kg (4.0 - 5.5 lbs.)

MONTH IN INTELL XPT

Belt clip, (+)(-) Bit, Battery, Charger, Z: Battery and Charger are sold separately



- 64Vmax Li-lon battery and new Outer Rotor BL motor enable high-power operation New steel cutting deck
- 3 Cutting mode selection
- Cutting/Collecting/Mulching/Rear discharge/Side discharge*1 (*1 Country-specific)
- Self-propelled function with a speed range of 1.5-6.5 km/h
- IPX4-rated water-resistance
- One hand cutting height adjustment (20-100 mm (10 stages))







LM004JZ 530mm (21") Cordless Lawn Mower

3 cutting modes (Normal/ Soft no-load/ Noise reduction)



Cutting Height Grass Box Capacity No Load Speed (RPM) Propelling speed Wheel diameter Dimensions (L x W x H)

Cutting Width

Net weight

534 mm (21") 20 - 100 mm (13/16 - 3-15/16") 70 L 2,300 - 2,800 2,500 - 2,800 1.5 - 6.5 km/h39 230 / 230 mm (9 / 9") 1,740 - 1,810 x 595 x 970 - 1,080 mm (68-1/2 -71-1/4 x 23-1/2 x 38-1/4

- 42-1/2") 31.5 - 34.6 kg (69.5 - 76.3 lbs.)

2 1 SOLAT XPT 1 Blade, Mulching plug, Socket wrench, Rod, Discharge chute, Battery, Charger, Z: Battery and Charger are sold separately



- 12Vmax CXT BL Cordless Pruning Shears
- Shear blade control is interlocked with Trigger for easier control of the blade
- Two control buttons on the tool body
- The use of BL Coreless motor allows for reduction in the grip diameter and weight to reduce user's fatigue from pruning
- Adjustment of blade overlap when closed
- External oil port







UP100DZ Cordless Pruning Shears

Shear blade control is interlocked with Trigger for easier control of the blade

Li-ion _{Ab} 4.0 2.0 1.5



Capacity Vibration level Sound pressure leve Dimension (LxWxH)

Max cuttina: 25 mm (1") 2.5 m/s2 or less 70 dB(A) or less w/o Battery: 259 x 53 x 98 mm (10-1/4 x 2-1/16 x3-7/8") w/BL1016/BL1021B: 285 x 64 x 98 mm (11-1/4 x 2-1/2 x 3-7/8") w/BL1041B: 308 x 64 x 98 mm (12-1/8 x 2-1/2 x 3-7/8")

Net weiaht 0.89 - 1.1 ka (2.0 - 2.4 lbs.)



Oil spray, Hex wrench, Socket wrench, Dressing stone, Holster, Battery, Charger, DZ: Battery and Charger are sold separately





- Pump attachment designed to be compatible with cordless multi function power heads
- Can be used for water pumping-up, draining or sprinkling at a wide range of work sites including irrigation, construction and more
- Lowest water level for starting operation: 20 mm
- Lowest residual water level: 10 mm
- Max flow rate: 135 L/min





- Use of hedge trimmer type blade reduces the flying distance and speed of stones and debris
- Trimming can be done without swinging blade.
 Curved tooth with 3 sharpened edges
- Metal under plate allows user to do trimming while sliding
- this attachment on the ground because it is made of sheet metal, which is more resistant to abrasion than the plastic one of Competitor E






- Compact and lightweight, making it easy for even senior citizens or women to use.
- Nozzle mounting diameter: ø75mm
- Nozzle tip diameter: ø58mm is reduced to provide enough air speed to blowdry fallen leaves or grass clippings.
- With Telescopic nozzle, length can be adjusted in 3 stages by 50mm according to user's operating environment

E-19788

T.C.T Efficut Metal Saw Blade



- Faster cutting compared to standard blades
- High efficiency and long life for stationary metal cutting saw
- Mainly for metal and stainless steel with an enhanced tip shape to improve cutting and durability for 12" Metal Cutter





D-77257

Wood Brad Point Drill Bit

- Available size 3mm, 4mm, 5mm, 6mm, 7mm, 8mm, 9mm, 10mm
- Brad point drill bit is the most popular drill in wood drill
- Suitable for drilling small to medium diameter
- Able to drill soft plastics other than general wood





Visit us at: www.makita.com.sg

IDEMCO

W: www.idemcosb.com.my

E: idemco@idemcosb.com.my

T: +6 03-7781 7973

