




IDEMCO

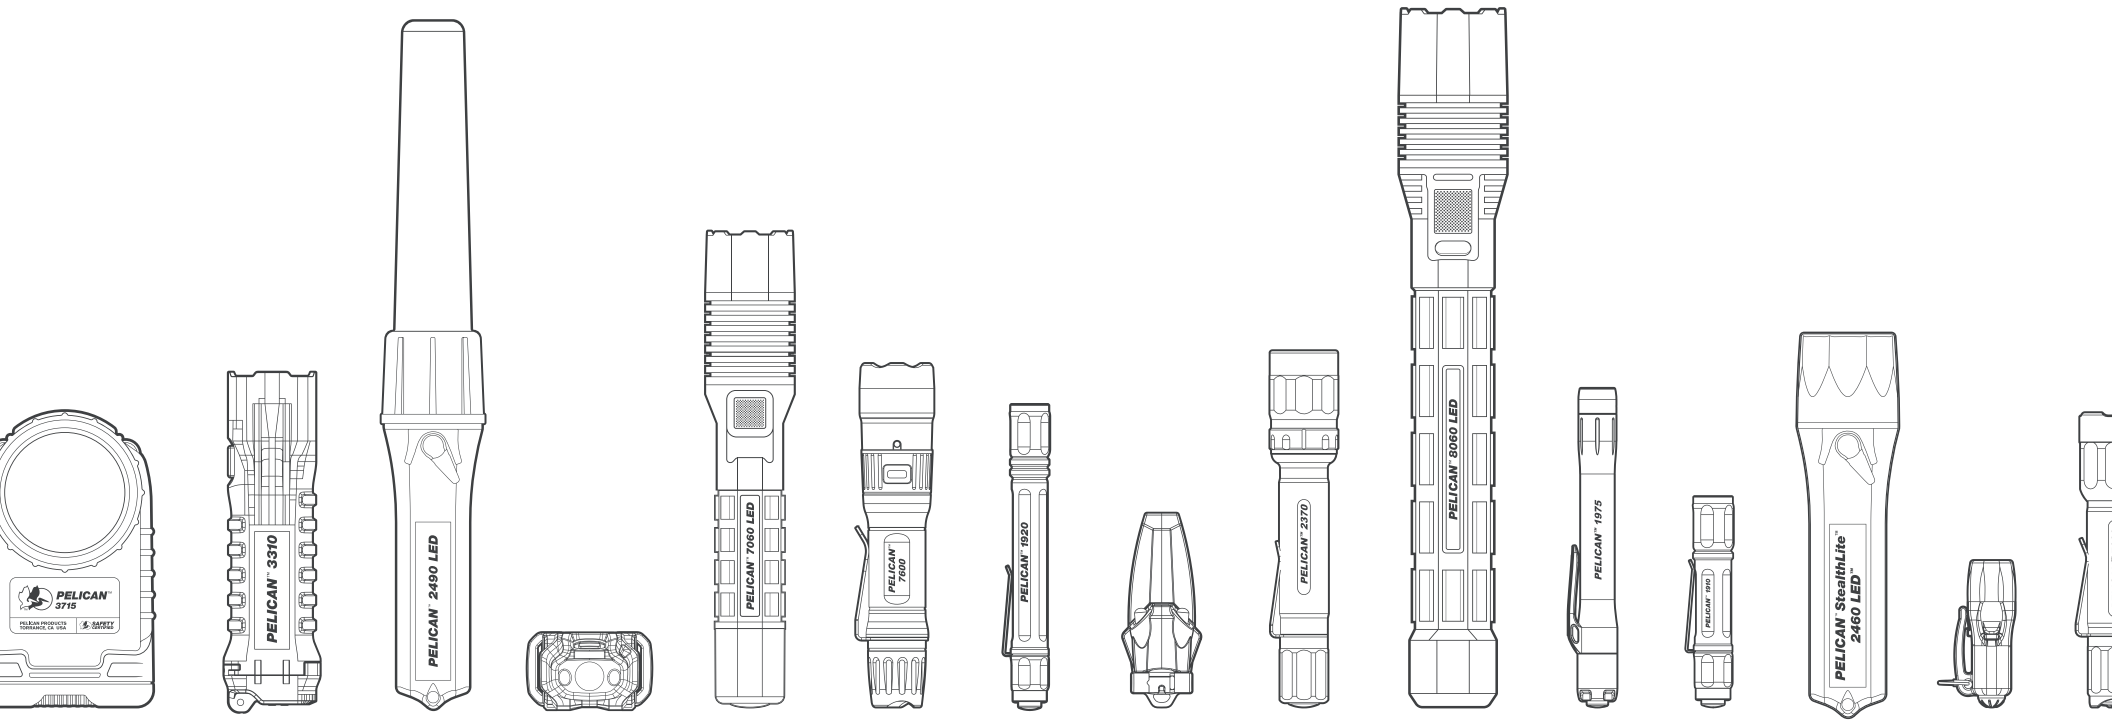

2022 PELICAN™ LIGHTS CATALOG

PELICAN LIGHTS

SAFETY CERTIFIED LIGHTS <small>PGS 3 - 6</small>																				
1930	2220	1830	1965	1975 NEW	1975i NEW	2010	2010PL	2315 NEW	2410	2410PL	2460	3315	3315PL	3325	3345	9415	9415i			
SAFETY CERTIFIED RIGHT ANGLE & ARTICULATING LIGHTS <small>PGS 7 - 8</small>										SAFETY CERTIFIED HEADLAMPS <small>PGS 9 - 10</small>										
3415	3415M	3610	3610PL	3715	3715PL	3765	3765PL			2610	2690	2745	2755	2765	2785					
	 <small>Magnetic Clip</small>																			
HIGH PERFORMANCE LIGHTS <small>PGS 11 - 12</small>										HIGH PERFORMANCE TACTCAL LIGHTS <small>PGS 13 - 14</small>										
1810	1910	1920	1970 NEW	2310 NEW	3310PL	3310ELS	3410	3410M	9410L	2350	2360	2370	7000	7060	7100	7110	7600	7610	7620	8060
								 <small>Magnetic Clip</small>												
HIGH PERFORMANCE HEADLAMPS <small>PGS 15 - 16</small>						CORRECT COLOR LIGHTS <small>PGS 19 - 20</small>						5 SERIES LIGHTS <small>PGS 21 - 22</small>								
2720	2740	2750	2760	2780	2780R	2750CC	2755CC	3310CC	3315CC	3410CC	3415CC	5000	5010	5020	5050R					
SPECIALTY LIGHTS <small>PGS 23 - 24</small>					REMOTE AREA LIGHTING SYSTEMS <small>PGS 25 - 28</small>															
2130	2130IR	2365	2490	9430	9430SL	9440	9455	9460	9460M	9470	9470M	9480	9490	9500	9600					



DEAR PELICAN CUSTOMER,

After over 45 years in business, Pelican Products, Inc. understands the critical importance of lighting tools. As an avid diver since age 11, our founder recognized the need for rugged flashlights that would work underwater and would not fail. Pelican has since grown to provide a wide range of advanced lighting systems to support professionals and outdoor enthusiasts alike.

Our lighting products lead the industry in LED light output performance, and we offer more safety approved industrial lights certified for Class I, II, III Div 1 and groups ABCDEFG than any of our competitors. With a lighting product line ranging from compact to large, headlamps to right angle lights, tactical to remote area lighting, dive lights and everything in between, we are confident you will find the perfect model to fit your needs. Our lighting tools are unbeatable in lumens, longevity, and energy efficiency, plus every Pelican light boasts our world-famous Guarantee of Excellence.

We take great pride in the products we've created over the years for law enforcement, firefighters, military personnel, photographers and many others who have counted on the Pelican name. We would not be the global brand that we are today without the consistent support of our loyal customers.

On behalf of myself and my fellow Pelican employees around the world, we thank you for your business.

Sincerely,

Phil Gyor
Chief Executive Officer

MARKETS SERVED //

**FIRE
MILITARY
INDUSTRIAL
LAW ENFORCEMENT
OUTDOOR
CONSUMER**



TABLE OF CONTENTS

■ PERFORMANCE & SAFETY	1
■ SAFETY CERTIFIED LIGHTS	3
Right Angle & Articulating Lights	7
Headlamps	9
■ HIGH PERFORMANCE LIGHTS	11
Tactical Lights	13
Headlamps	15
■ PHOTOLUMINESCENT LIGHTS	17
■ CORRECT COLOR™ LIGHTS	19
■ 5 SERIES LIGHTS	21
■ SPECIALTY LIGHTS	23
■ REMOTE AREA LIGHTING SYSTEMS	25
■ HOLSTERS & WAND ACCESSORIES	29
■ SPECIFICATIONS	31
■ CUSTOM LABEL LIGHTING FEATURES	35

PERFORMANCE

ANSI STANDARDS (AMERICAN NATIONAL STANDARDS INSTITUTE)

Why create standards? While Pelican was one of the first manufacturers to use quantifiable test procedures, the need was recognized to develop a common language that customers could use to select the right flashlight for their specific needs. As a result, the American National Standards Institute (ANSI), with input from the

flashlight industry, developed performance standards and symbols to effectively communicate a flashlight's features and benefits.

The resulting ANSI/NEMA FL 1 Standards include the following six criteria:

STANDARDS AND RATINGS (APPLICABLE TO FLASHLIGHTS ONLY)

LIGHT OUTPUT

Light Output is the total luminous flux. It is the total quantity of emitted overall light energy as measured by integrating the entire angular output of the portable light source. Light output in this standard is expressed in units of lumens.

BEAM DISTANCE

Beam Distance is defined as the distance from the device at which the light beam is 0.25 lux (0.25 lux is approximately the equivalent of the light emitted from the full moon "on a clear night in an open field").

WATER RESISTANT

Water Resistant // IPX4 - Water splashed against the device from any direction shall have no harmful effects.

WATERPROOF/SUBMERSIBLE


Waterproof // IPX7 - Ingress of water in quantities causing harmful effects shall not be possible when the enclosure is temporarily immersed in water under standardized conditions of pressure and time. Submersible // IPX8 - Ingress of water in quantities causing harmful effects shall not be possible when the enclosure is continuously immersed in water under conditions which shall be stated by manufacturer, but which are more severe than for IPX7.

RUN TIME

Run Time is defined as the duration of time from the initial light output value - defined as 30 seconds after the point the device is first turned on - using fresh batteries, until the light output reaches 10% of the initial value.

PEAK BEAM INTENSITY

Peak Beam Intensity is the maximum luminous intensity typically along the central axis of a cone of light. The value is reported in candela and does not change with distance.

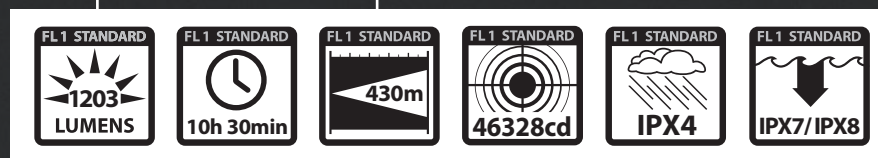

GLOSSARY OF TERMS

Candela A unit of measurement of the intensity of light that is emitted by a light source in a particular direction.


Lux The unit of luminous flux in the International System, equal to the amount of light given out through a solid angle by a source of one candela intensity radiating equally in all directions.

Lumen A unit of measurement of the amount of brightness that comes from a light source. Lumens define "luminous flux," which is energy within the range of frequencies we perceive as light.

Integrating Sphere An integrating sphere is a measurement device with an entrance port that can accept all the directional light output of the device under test, or can totally enclose the device itself. The walls of the sphere should be highly diffused with high reflectivity (>80%) and the spectroradiometer should be shielded from direct view of the device under test by a baffle system.

Rechargeable Denotes a flashlight which contains rechargeable batteries and charging station. These models are shown with the rechargeable icon.

IP (Ingress Protection) - These ratings specify the environmental protection the enclosure provides. The IP rating normally has two numbers (IPXX). The first number represents protection from solid objects or materials (dust) whereas the second number represents protection from liquids (water). With the IP rating IP 54, 5 describes the level of protection from solid objects and 4 describes the level of protection from liquids as described by the IP Rating System (Solids vary from 0-6 IP rating, Liquids vary from 0-8 IP rating).

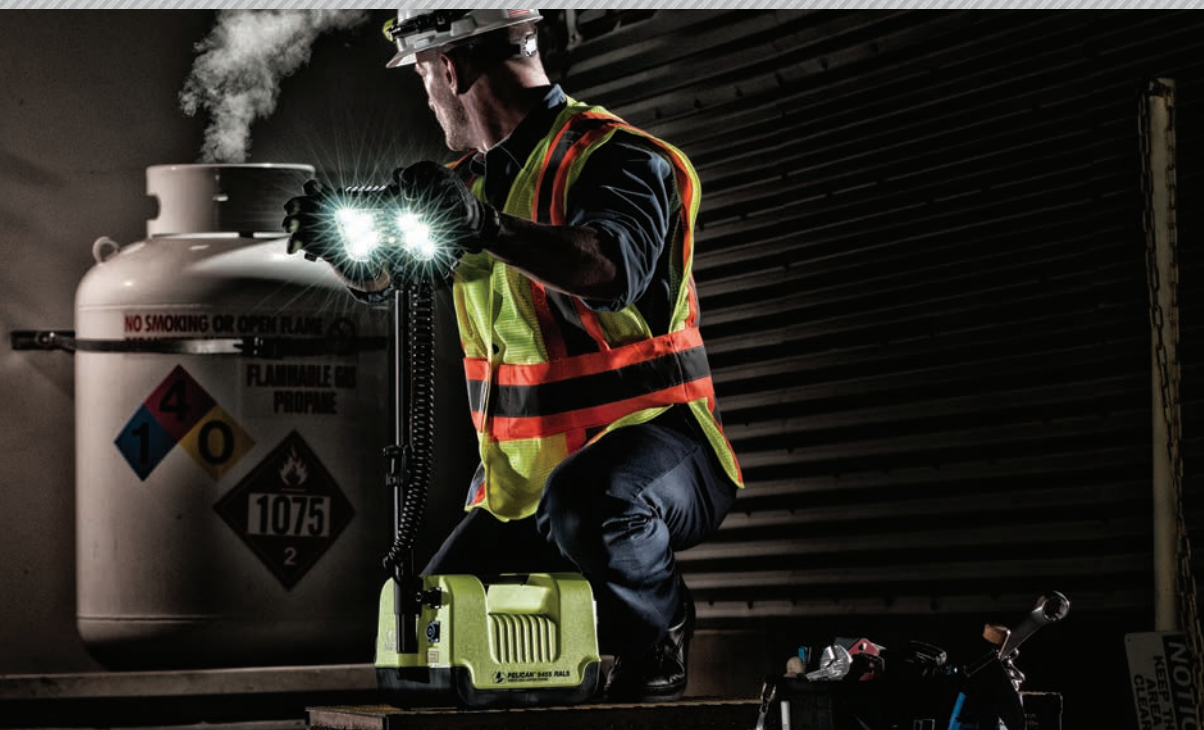

INTRINSICALLY SAFE.

YOUR PASSPORT THROUGH HAZARDOUS LOCATIONS



SAFETY CERTIFIED


Whether working in a Class I Oil Refinery or in the silo of a **Class III** Textile Mill, safety is always a concern and your lighting tool shouldn't add to your worries. Pelican builds lighting tools certified for hazardous work environments. In fact we make more safety approved lights certified for **Class I II III Div. 1** and groups **ABCDEFGH** than anyone else.

HAZARDOUS AREA ELECTRICAL GUIDELINES

CLASSIFICATIONS	SUBSTANCE	TYPICAL ENVIRONMENTS
CLASS I	DIVISION 1 DIVISION 2	Flammable Gases, Vapors, or Liquids Oil Refinery, Paint Warehouse Spray Booth, Offshore Oil Rig
CLASS II	DIVISION 1 DIVISION 2	Combustible Dusts Coal Mine, Munitions Factory, Grain Silo, Hay Storage Facility
CLASS III	DIVISION 1 DIVISION 2	Ignitable Fibers & Flyings Paper Mill, Woodworking Facility, Textile Mill, Cotton Gin

Division 1 (hazard likely): Where volatile substances can exist all of the time or some of the time under normal operating conditions.

Division 2 (hazard not likely): Where volatile substances are not likely to exist under normal operating conditions.

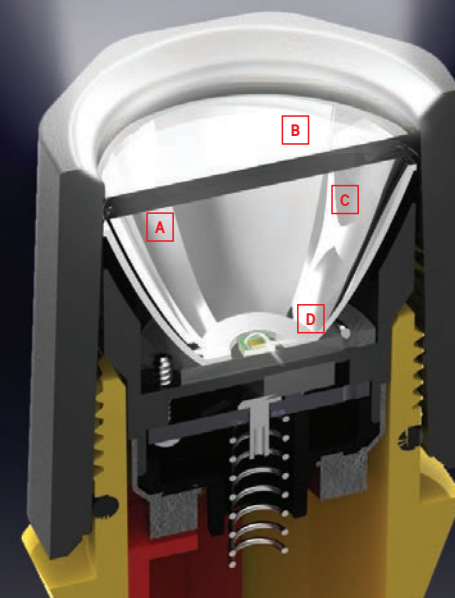

NEW DEEP MOUNT LED TECHNOLOGY

Our engineering team has designed a new high performance LED lamp module (Deep Mount LED Module). These lights are now brighter, with close to 100% increase in lumens and a 2.5 times increase in lux value over previous versions (as well as offering a more robust design).

- A** New deep dish reflector provides up to 2.5 times lux increase, and 100% lumen increase
- B** Robust, over-molded polycarbonate lens won't yellow
- C** Opti-mechanical design gathers and focuses 100% of the light
- D** LED is mounted directly to the PCB board, creating a strong and efficient design solution

A close-up photograph of a man with a beard, wearing a red hard hat and safety glasses, holding a bright green Pelican 2315 flashlight. The background is dark and industrial, with a blue wheel visible. The flashlight has "PELICAN 2315" printed on it.

SAFETY CERTIFIED LIGHTS

When hazardous areas are present, you can count on Pelican's line of safety certified lighting tools. From hand-held lights to headlamps to right angle lights, there is a safety certified light that has the features you need. Features include multiple light modes, photoluminescent bodies, dual beams, integrated battery level indicators and more. With a Pelican™ light, you can feel safe illuminating hazardous environments without being a source of ignition.

L4™ 1830

LIGHT SOURCE //
LED
BATTERIES //
3 AAAA Alkaline (included)
LENGTH //
6.2" (15.7cm)
CERTIFICATIONS //
CI, D1



5
LUMENS

32h
RUN TIME

L1™ 1930

LIGHT SOURCE //
LED
BATTERIES //
4 LR 44 Alkaline (included)
LENGTH //
2.64" (6.7cm)
CERTIFICATIONS //
CI, D1/CI II, D2, IECEx ia



12
LUMENS

4h 15m
RUN TIME

MITYLITE™ 1965

LIGHT SOURCE //
LED
BATTERIES //
2 AAA Alkaline (included)
LENGTH //
5.48" (13.9cm)
CERTIFICATIONS //
CI II III, D1



87
LUMENS

2h 30m
RUN TIME

1975

NEW

LIGHT SOURCE //
LED
BATTERIES //
2 AAA Alkaline (included)
LENGTH //
5.75" (14.6cm)
CERTIFICATIONS //
CI II III, D1



117
LUMENS

2h 15m
RUN TIME

1975i

NEW

LIGHT SOURCE //
LED
BATTERIES //
2 AAA Alkaline (included)
LENGTH //
5.75" (14.6cm)
CERTIFICATIONS //
IECEx ia



117
LUMENS

2h 15m
RUN TIME

SABRELITE™ 2010

LIGHT SOURCE //
LED
BATTERIES //
3 C Alkaline (not included)
LENGTH //
8.11" (20.6cm)
CERTIFICATIONS //
CI II III, D1



161
LUMENS

22h
RUN TIME

SABRELITE™ 2010PL PHOTOLUMINESCENT SHROUD

LIGHT SOURCE //
LED
BATTERIES //
3 C Alkaline (not included)
LENGTH //
8.11" (20.6cm)
CERTIFICATIONS //
CI II III, D1



161
LUMENS

22h
RUN TIME

VB3™ 2220

LIGHT SOURCE //
LED
BATTERIES //
2 CR2032 Lithium (included)
LENGTH //
3.5" (8.9cm)
CERTIFICATIONS //
CI, D1



9
LUMENS

34h
RUN TIME

2315

NEW

LIGHT SOURCE //
LED
BATTERIES //
2 AA Alkaline (included)
LENGTH //
6.22" (15.8cm)
MODES //
High / Low
CERTIFICATIONS //
CI II III, D1, IECEx ia



115
LUMENS

6h
RUN TIME

STEALTHLITE™ 2410

LIGHT SOURCE //
LED
BATTERIES //
4 AA Alkaline (included)
LENGTH //
7" (17.8cm)
CERTIFICATIONS //
CI II III, D1, IECEx ia



183
LUMENS

5h 45m
RUN TIME

STEALTHLITE™ 2410PL
PHOTOLUMINESCENT SHROUD

LIGHT SOURCE //
LED
BATTERIES //
4 AA Alkaline (included)
LENGTH //
7" (17.8cm)
CERTIFICATIONS //
CI, II, III D1, IECEx ia



183
LUMENS

5h 45m
RUN TIME

STEALTHLITE™ 2460

LIGHT SOURCE //
LED
BATTERIES //
NiMH (included)
LENGTH //
7" (17.8cm)
CERTIFICATIONS //
CI II, D2



183
LUMENS

5h
RUN TIME

3315

LIGHT SOURCE //
LED
BATTERIES //
3 AA Alkaline (included)
LENGTH //
6.14" (11.8cm)
CERTIFICATIONS //
CI II III, D1



160
LUMENS

19h
RUN TIME

3315PL

LIGHT SOURCE //
LED
BATTERIES //
3 AA Alkaline (included)
LENGTH //
6.14" (11.8cm)
CERTIFICATIONS //
CI II III, D1



160
LUMENS

19h
RUN TIME

3325

LIGHT SOURCE //
LED
BATTERIES //
3 AA Alkaline (included)
LENGTH //
6.06" (15.4cm)
CERTIFICATIONS //
CI II III, D1, IECEx ia



171
LUMENS

16h
RUN TIME

3345

LIGHT SOURCE //
LED
BATTERIES //
3 AA Alkaline (not included)
LENGTH //
7.25" (18.4cm)
CERTIFICATIONS //
CI II III, D1, IECEx ia



280
LUMENS

14h
RUN TIME

UP TO

9415 LANTERN

LIGHT SOURCE //
LED
BATTERIES //
NiMH (included)
LENGTH //
8.75" (22.2cm)
MODES //
High / Low / Flashing
Full Time Battery Indicator
CERTIFICATIONS //
CI, D1



588
LUMENS

11h 30m
RUN TIME

UP TO

9415i LANTERN

LIGHT SOURCE //
LED
BATTERIES //
NiMH (included)
LENGTH //
8.75" (22.2cm)
MODES //
High / Low / Flashing
Full Time Battery Indicator
CERTIFICATIONS //
IECEx ia, ATEX Zone 0



392
LUMENS

11h
RUN TIME

UP TO





SAFETY CERTIFIED RIGHT ANGLE & ARTICULATING LIGHTS

Firefighters put everything on the line and having the correct lighting tool is critical to their safety. Right angle (90°) and articulating flashlights, often worn on turnout coats, offer hands-free performance when it's needed the most. With extreme peak beam intensity and smoke-cutting penetration, these lights will get you in and out of tough situations safely.

3415 / 3415M

LIGHT SOURCE //
LED
BATTERIES //
3 AA (not included)
LENGTH //
7.44" (18.9cm)
MODES //
High
Spot / Flood / Both
CERTIFICATIONS //
CI II III, D1, IECEx ia



3415M Includes
Magnetic Clip



336
LUMENS

15h
RUN TIME

LITTLE ED™ 3610

LIGHT SOURCE //
LED
BATTERIES //
4 AA Alkaline (included)
LENGTH //
7.51" (19.1cm)
CERTIFICATIONS //
CI II III, D1



183
LUMENS

5h 45m
RUN TIME

LITTLE ED™ 3610PL PHOTOLUMINESCENT SHROUD

LIGHT SOURCE //
LED
BATTERIES //
4 AA Alkaline (included)
LENGTH //
7.51" (19.1cm)
CERTIFICATIONS //
CI II III, D1



183
LUMENS

5h 45m
RUN TIME

3715

LIGHT SOURCE //
LED
BATTERIES //
4 AA Alkaline (not included)
LENGTH //
5.36" (13.6cm)
MODES //
High / Low / Flashing / Downcast
CERTIFICATIONS //
CI, D1



233
LUMENS

31h
RUN TIME

UP TO

3715PL PHOTOLUMINESCENT SHROUD

LIGHT SOURCE //
LED
BATTERIES //
4 AA Alkaline (not included)
LENGTH //
5.36" (13.6cm)
MODES //
High / Low / Flashing / Downcast
CERTIFICATIONS //
CI, D1



233
LUMENS

31h
RUN TIME

UP TO

3765

LIGHT SOURCE //
LED
BATTERIES //
NiMH (included)
LENGTH //
5.36" (13.6cm)
MODES //
High / Low / Flashing / Downcast
CERTIFICATIONS //
CI, D1



237
LUMENS

14h
RUN TIME

UP TO



3765PL PHOTOLUMINESCENT SHROUD

LIGHT SOURCE //
LED
BATTERIES //
NiMH (included)
LENGTH //
5.36" (13.6cm)
MODES //
High / Low / Flashing / Downcast
CERTIFICATIONS //
CI, D1



237
LUMENS

14h
RUN TIME

UP TO



A full-page background image showing a male worker in profile, facing right. He is wearing a yellow hard hat with a black and yellow headlamp mounted on it. The headlamp has the number '2765' on it. He is also wearing safety glasses and a blue long-sleeved shirt with an orange and green high-visibility safety vest. He is reaching out with his right hand, wearing a yellow work glove, towards a grey electrical control box. The background is a dark, industrial environment with various pipes and machinery.

SAFETY CERTIFIED HEADLAMPS

With up to 215 lumens, multiple light modes and revolutionary downcast lighting, Pelican™ safety certified headlamps will give you the confidence to stare danger right in the face. And with the ability to easily mount your headlamp to any helmet, you will never have any issues lighting up the workspace.

HEADSUP LITE™ 2610

LIGHT SOURCE //
LED
BATTERIES //
3 AAA Alkaline (included)
LENGTH //
1.49" (3.8cm)
MODES //
High / Low
CERTIFICATIONS //
CI, D1, IECEx ia



30
LUMENS

47h
RUN TIME

UP TO

HEADSUP LITE™ 2690

LIGHT SOURCE //
LED
BATTERIES //
3 AAA Alkaline (included)
LENGTH //
2.81" (7.1 cm)
CERTIFICATIONS //
CI II III, D1, IECEx ia



74
LUMENS

11h
RUN TIME

UP TO

2745 HEADLAMP

LIGHT SOURCE //
LED
BATTERIES //
3 AAA Alkaline (included)
LENGTH //
2.25" (5.7 cm)
MODES //
High / Low / Flashing
CERTIFICATIONS //
CI, D1, IECEx ia



33
LUMENS

40h
RUN TIME

UP TO

2755 HEADLAMP

LIGHT SOURCE //
LED
BATTERIES //
3 AAA Alkaline (included)
LENGTH //
2.25" (5.7 cm)
MODES //
High / Low / Flashing /
Low Battery Warning
CERTIFICATIONS //
CI, D1, IECEx ia



118
LUMENS

16h
RUN TIME

UP TO

2765 HEADLAMP

LIGHT SOURCE //
LED
BATTERIES //
3 AAA Alkaline (included)
LENGTH //
2.25" (5.7 cm)
MODES //
High / Low / Flashing / Downcast
CERTIFICATIONS //
CI, D1, IECEx ia



155
LUMENS

14h
RUN TIME

UP TO

2785 HEADLAMP

LIGHT SOURCE //
LED
BATTERIES //
4 AA Alkaline (included)
LENGTH //
3.00" (7.6 cm)
MODES //
High / Medium / Low /
Flashing / Downcast
CERTIFICATIONS //
CI D1



215
LUMENS

98h
RUN TIME

UP TO



HIGH PERFORMANCE LIGHTS

Whether power is a must or just a convenience, choose from Pelican's range of powerful lights. From small lights to large lights, handheld or mountable, you'll be able to find the perfect model for your next job.

1810**LIGHT SOURCE //**

LED

BATTERIES //

4 LR 41 Alkaline (included)

LENGTH //

1.50" (3.8 cm)



16	8h 30m
LUMENS	RUN TIME

1910**LIGHT SOURCE //**

LED

BATTERIES //

1 AAA Alkaline (included)

LENGTH //

3.8" (9.7cm)

MODES //

High / Low



106	4h	UP TO
LUMENS	RUN TIME	

1920**LIGHT SOURCE //**

LED

BATTERIES //

2 AAA Alkaline (included)

LENGTH //

5.5" (14.0cm)

MODES //

High / Low



224	8h 45m	UP TO
LUMENS	RUN TIME	

1970

NEW

LIGHT SOURCE //

LED

BATTERIES //

2 AAA Alkaline (included)

LENGTH //

5.75" (14.6cm)

MODES //

High



139	4h 15m
LUMENS	RUN TIME

2310

NEW

LIGHT SOURCE //

LED

BATTERIES //

2 AA Alkaline (included)

LENGTH //

6.22" (15.8cm)

MODES //

High / Low



350	27h	UP TO
LUMENS	RUN TIME	

3310PL
PHOTOLUMINESCENT**LIGHT SOURCE //**

LED

BATTERIES //

3 AA Alkaline (included)

LENGTH //

6.14" (15.6cm)

MODES //High / Low / Flashing
(flashlight body glows in the dark)

(Photo Luminescent)



378	202h	UP TO
LUMENS	RUN TIME	

3310ELS
(EMERGENCY LIGHTING SYSTEM)**LIGHT SOURCE //**

LED

BATTERIES //

3 AA Alkaline (included)

LENGTH //

6.14" (15.6cm)

INCLUDES //3310PL and Wall Mountable Case
(flashlight body glows in the dark)

(Photo Luminescent)



378	202h	UP TO
LUMENS	RUN TIME	

3410 / 3410M**LIGHT SOURCE //**

LED

BATTERIES //

3 AA (not included)

LENGTH //

7.44" (18.9cm)

MODES //High / Medium / Low
Spot / Flood / Both

(Photo Luminescent)

3410M Includes
Magnetic Clip

635	61h	UP TO
LUMENS	RUN TIME	

9410L LED LANTERN**LIGHT SOURCE //**

LED

BATTERIES //

Lithium-Ion (included)

LENGTH //

8.75" (22.2 cm)

MODES //High / Low / Flashing
Full Time Battery Indicator



2207	11h	UP TO
LUMENS	RUN TIME	

HIGH PERFORMANCE TACTICAL LIGHTS

Pelican's tactical lights are field ready, built to withstand the hard knocks that come with the job. Each intense, focused beam provides downrange visibility and peripheral lighting aids in situational awareness.

2350

LIGHT SOURCE //
LED
BATTERIES //
1 AA Alkaline (included)
LENGTH //
4.23" (10.7 cm)
MODES //
High/ Strobe / Low



178 LUMENS	21h RUN TIME	UP TO
----------------------	------------------------	-------

7000

LIGHT SOURCE //
LED
BATTERIES //
2 CR123 Lithium-Ion
LENGTH //
5.31" (13.5 cm)
MODES //
High / Strobe / Medium / Low
Self Programmable



774 LUMENS	13h RUN TIME	UP TO
----------------------	------------------------	-------

7600

LIGHT SOURCE //
LED
BATTERIES //
Lithium-Ion (included)
LENGTH //
6.19" (15.7cm)
MODES //
High / Strobe / Medium / Low
LED COLORS //
White / Red / Green
PROGRAMMABLE //
5 Selectable Programs



994 LUMENS	29h RUN TIME	UP TO
----------------------	------------------------	-------

2360

LIGHT SOURCE //
LED
BATTERIES //
2 AA Alkaline (included)
LENGTH //
6.2" (15.7cm)
MODES //
High/ Strobe/ Low



375 **13h**
LUMENS RUN TIME

2370

LIGHT SOURCE //
LED
BATTERIES //
2 AA Alkaline (included)
LENGTH //
6.43" (16.3cm)
MODES //
High / Low / Red / Blue
LIGHT COLORS //
White / Red / Blue



358 **11h**
LUMENS RUN TIME

**7060**

LIGHT SOURCE //
LED
BATTERIES //
Lithium-Ion (included)
LENGTH //
8.65" (22cm)
MODES //
High / Strobe / Medium / Low
Self Programmable



535 **68h**
LUMENS RUN TIME

7100

LIGHT SOURCE //
LED
BATTERIES //
Lithium-Ion (included)
LENGTH //
5.12" (13cm)
MODES //
High / Strobe / Medium / Low
PROGRAMMABLE //
5 Selectable Programs



695 **9h 15m**
LUMENS RUN TIME

7110

LIGHT SOURCE //
LED
BATTERIES //
1 AA (included) or 1 CR123
LENGTH //
4.63" (11.8cm)
MODES //
High / Strobe / Medium / Low
PROGRAMMABLE //
5 Selectable Programs



445 **13h**
LUMENS RUN TIME

7610

LIGHT SOURCE //
LED
BATTERIES //
1 AA (included) or 2 CR123
LENGTH //
5.44" (13.8cm)
MODES //
High / Strobe / Medium / Low
PROGRAMMABLE //
5 Selectable Programs



1018 **33h**
LUMENS RUN TIME

7620

LIGHT SOURCE //
LED
BATTERIES //
2 AA (included), 2 CR123 or 3 CR123
LENGTH //
6.75" (17.15cm)
MODES //
High / Strobe / Medium / Low
PROGRAMMABLE //
5 Selectable Programs



1124 **37h**
LUMENS RUN TIME

8060

LIGHT SOURCE //
LED
BATTERIES //
NiMH (included)
LENGTH //
12.67" (32.2cm)
MODES //
High / Strobe / Medium / Low
Flashing / Self Programmable



1072 **60h**
LUMENS RUN TIME

2720 HEADLAMP

LIGHT SOURCE //

LED

BATTERIES //

3 AAA Alkaline (included)

LENGTH //

2.48" (6.3 cm)

MODES //

Variable Light Output /
Spot to Flood / Red Night Vision
Friendly LEDs**200**

LUMENS

103h

RUN TIME

UP TO

GESTURE
ACTIVATION
CONTROL

2740 HEADLAMP

LIGHT SOURCE //

LED

BATTERIES //

3 AAA Alkaline (included)

LENGTH //

2.25" (5.7 cm)

MODES //

High / Low /
Flashing / Red LED**66**

LUMENS

21h

RUN TIME

UP TO

2750 HEADLAMP

LIGHT SOURCE //

LED

BATTERIES //

3 AAA Alkaline (included)

LENGTH //

2.25" (5.7 cm)

MODES //

High / Low / Flashing / Red LED /
Low Battery Warning

(Photoluminescent)

**259**

LUMENS

11h

RUN TIME

UP TO

2760 HEADLAMP

LIGHT SOURCE //

LED

BATTERIES //

3 AAA Alkaline (included)

LENGTH //

2.25" (5.7 cm)

MODES //

High / Medium / Low /
Downcast / Flashing/
Red LED / Full-time Battery
Level Indicator**289**

LUMENS

11h

RUN TIME

UP TO

2780 HEADLAMP

LIGHT SOURCE //

LED

BATTERIES //

4 AA Alkaline (included)

LENGTH //

3.00" (7.6 cm)

MODES //

High / Medium /
Low / Flashing / Downcast/
Full-time Battery
Level Indicator

(Photoluminescent)

3 Interchangeable Covers Included

**430**

LUMENS

12h

RUN TIME

UP TO

2780R HEADLAMP



LIGHT SOURCE //

LED

BATTERIES //

Lithium-Ion (included)

LENGTH //

3.00" (7.6 cm)

MODES //

High / Medium / Low /
Flashing / Downcast /
Full-time Battery
Level Indicator

(Photoluminescent)

3 Interchangeable Covers Included

**558**

LUMENS

7h 30m

RUN TIME

UP TO

A soldier in camouflage gear is shown at night, wearing a Pelican headlamp. The headlamp is illuminated, casting a bright beam of light. The soldier is holding a metal rod or tool. In the background, there are military vehicles and equipment, all in a dark, nighttime setting.

HIGH PERFORMANCE HEADLAMPS

With up to 500 lumens, revolutionary downcast lighting, USB charging and battery level indication, these headlamps are packed with features. Other options, including night vision friendly red illumination, interchangeable body colors and multiple settings, make these headlamps your best partner for the dark.

PHOTOLUMINESCENT LIGHTS

When the power goes out, these flashlights glow the brightest. Pelican's photoluminescent models are made with "glow-in-the-dark" material to help you find your flashlight in an emergency.

PELICAN™ 3310

3325

LIGHT SOURCE //
LED
BATTERIES //
3 AA Alkaline (included)
LENGTH //
6.06" (15.4cm)
CERTIFICATIONS //
CI, D1, IECEx ia



171
LUMENS

16h
RUN TIME

SABRELITE™ 2010PL PHOTOLUMINESCENT SHROUD

LIGHT SOURCE //
LED
BATTERIES //
3 C Alkaline (not included)
LENGTH //
8.11" (20.6cm)
CERTIFICATIONS //
CI II III, D1



161
LUMENS

22h
RUN TIME

2780R HEADLAMP



LIGHT SOURCE //
LED
BATTERIES //
Lithium-Ion (included)
LENGTH //
3.00" (7.6 cm)
MODES //
High / Medium / Low /
Flashing / Downcast /
Full-time Battery
Level Indicator

■ ■ ■ (Photoluminescent)
3 Interchangeable Covers Included



558
LUMENS

7h 30m
RUN TIME

UP TO

3410 / 3410M

LIGHT SOURCE //
LED
BATTERIES //
3 AA (not included)
LENGTH //
7.44" (18.9cm)
MODES //
High / Medium / Low
Spot / Flood / Both
■ (Photoluminescent)



3410M Includes
Magnetic Clip



635
LUMENS

61h
RUN TIME

UP TO

STEALTHLITE™ 2410PL

PHOTOLUMINESCENT SHROUD

LIGHT SOURCE //
LED
BATTERIES //
4 AA Alkaline (included)
LENGTH //
7" (17.8cm)
CERTIFICATIONS //
CI, II, III D1



183
LUMENS

5h 45m
RUN TIME

2750 HEADLAMP

LIGHT SOURCE //
LED
BATTERIES //
3 AAA Alkaline (included)
LENGTH //
2.25" (5.7 cm)
MODES //
High / Low / Flashing / Red LED /
Low Battery Warning
■ ■ (Photoluminescent)



259
LUMENS

11h
RUN TIME

UP TO

2780 HEADLAMP

LIGHT SOURCE //
LED
BATTERIES //
4 AA Alkaline (included)
LENGTH //
3.00" (7.6 cm)
MODES //
High / Medium /
Low / Flashing / Downcast/
Full-time Battery
Level Indicator
■ ■ ■ (Photoluminescent)
3 Interchangeable Covers Included



430
LUMENS

12h
RUN TIME

UP TO

3310PL

PHOTOLUMINESCENT

LIGHT SOURCE //
LED
BATTERIES //
3 AA Alkaline (included)
LENGTH //
6.14" (15.6cm)
MODES //
High / Low / Flashing
(flashlight body glows in the dark)
■ (Photoluminescent)



378
LUMENS

202h
RUN TIME

UP TO

3310ELS

(EMERGENCY LIGHTING SYSTEM)

LIGHT SOURCE //
LED
BATTERIES //
3 AA Alkaline (included)
LENGTH //
6.14" (15.6cm)
INCLUDES //
3310PL and Wall Mountable Case
(flashlight body glows in the dark)
■ (Photoluminescent)



378
LUMENS

202h
RUN TIME

UP TO

3315PL

PHOTOLUMINESCENT

LIGHT SOURCE //
LED
BATTERIES //
3 AA Alkaline (included)
LENGTH //
6.14" (11.8cm)
CERTIFICATIONS //
CI II III, D1
■ (Photoluminescent)



160
LUMENS

19h
RUN TIME

LITTLE ED™ 3610PL

PHOTOLUMINESCENT SHROUD

LIGHT SOURCE //
LED
BATTERIES //
4 AA Alkaline (included)
LENGTH //
7.51" (19.1cm)
CERTIFICATIONS //
CI II III, D1



183
LUMENS

5h 45m
RUN TIME

3715PL

PHOTOLUMINESCENT SHROUD

LIGHT SOURCE //
LED
BATTERIES //
4 AA Alkaline (not included)
LENGTH //
5.36" (13.6cm)
MODES //
High / Low / Flashing / Downcast
CERTIFICATIONS //
CI, D1



233
LUMENS

31h
RUN TIME

UP TO

3765PL

PHOTOLUMINESCENT SHROUD

LIGHT SOURCE //
LED
BATTERIES //
NiMH (included)
LENGTH //
5.36" (13.6cm)
MODES //
High / Low / Flashing / Downcast
CERTIFICATIONS //
CI, D1




237
LUMENS

14h
RUN TIME

UP TO

CORRECT COLOR™ LIGHTS

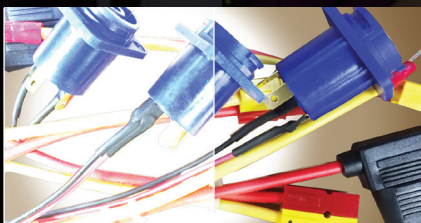


70 CRI
CONVENTIONAL
FLASHLIGHTS

90+ CRI
CORRECT
COLOR TECHNOLOGY

When you can't see the difference between one color cable and another, the job may be compromised. Now you can trust our select flashlights with new Correct Color™ technology to work in confidence.


2750CC HEADLAMP

LIGHT SOURCE //
LED
BATTERIES //
3 AAA Alkaline (included)
LENGTH //
2.25" (5.7cm)
MODES //
High / Low / Flashing
 (Photoluminescent)



183	11h	UP TO
LUMENS	RUN TIME	


3310CC

LIGHT SOURCE //
LED
BATTERIES //
3 AA Alkaline (included)
LENGTH //
6.14" (15.6 cm)
MODES //
High / Low / Flashing
 (Photoluminescent)



238	175h	UP TO
LUMENS	RUN TIME	

3410MCC


LIGHT SOURCE //
LED
BATTERIES //
3 AA Alkaline (not included)
LENGTH //
7.44" (18.9 cm)
MODES //
High / Medium / Low / Flashing
Spot / Flood / Both
 (Photoluminescent)



3410MCC Includes
Magnetic Clip

484	67h	UP TO
LUMENS	RUN TIME	


2755CC HEADLAMP

LIGHT SOURCE //
LED
BATTERIES //
3 AAA Alkaline (included)
LENGTH //
2.25" (5.7 cm)
MODES //
High / Low / Flashing
CERTIFICATIONS //
CI, D1, IECEx ia




72	15h	UP TO
LUMENS	RUN TIME	


3315CC

LIGHT SOURCE //
LED
BATTERIES //
3 AA Alkaline (included)
LENGTH //
6.14" (15.6 cm)
MODES //
On / Off
CERTIFICATIONS //
CI II II, D1, IECEx ia




130	16h 30m	UP TO
LUMENS	RUN TIME	

3415MCC

LIGHT SOURCE //
LED
BATTERIES //
3 AA Alkaline (not included)
LENGTH //
7.44" (18.9 cm)
MODES //
High / Flashing
Spot / Flood / Both
CERTIFICATIONS //
CI II II, D1, IECEx ia




3415MCC Includes
Magnetic Clip




258	13h	UP TO
LUMENS	RUN TIME	

A full-page photograph of a male worker in profile, wearing a yellow hard hat and a high-visibility safety vest over a dark blue shirt. He is holding a black flashlight in his right hand, pointing it towards a complex industrial machine. The machine is dark grey or black with numerous red and blue hoses and pipes connected to it. The background is dark and industrial. The text '5 SERIES LIGHTS' is overlaid in white on the right side of the image.

5 SERIES LIGHTS

Our 5 Series flashlights feature slide beam technology:
The flood position projects a wide beam to illuminate your work
area or use the spot beam for a long distance focused beam.

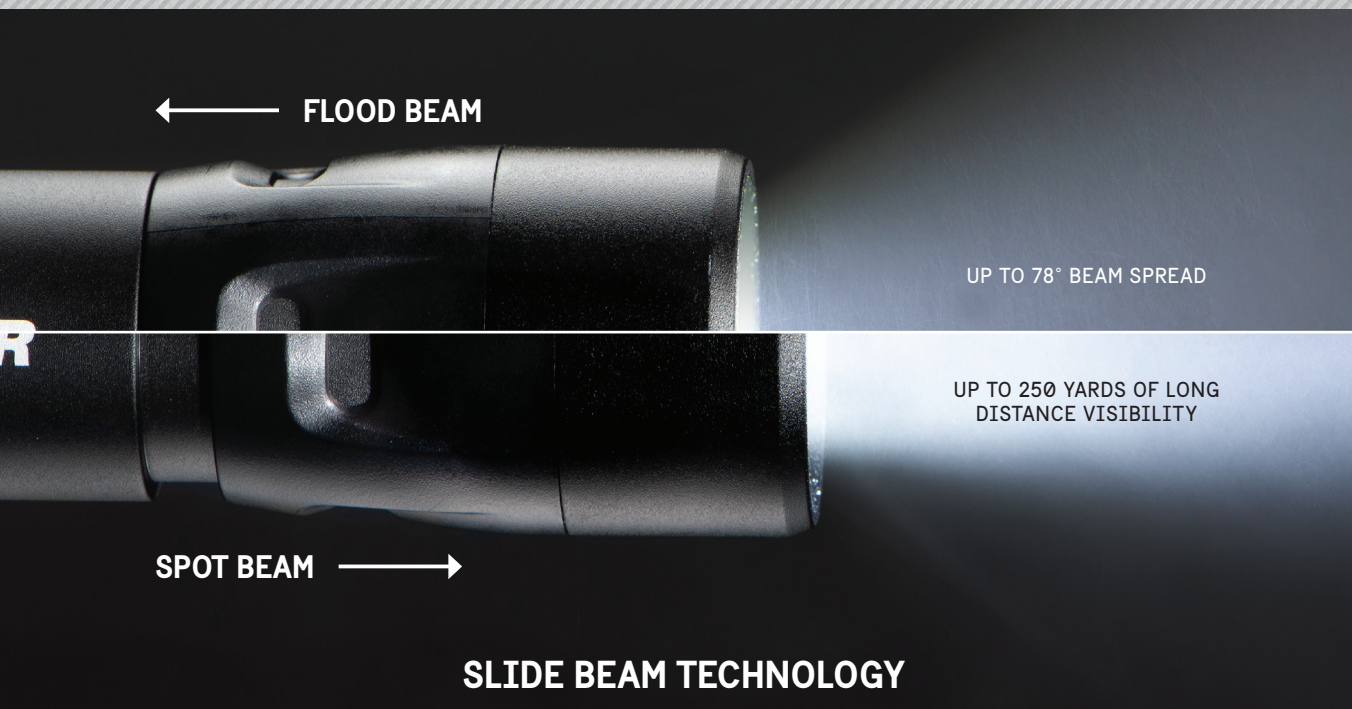**5000**

LIGHT SOURCE //
LED

BATTERIES //
2 AAA Alkaline (included)

LENGTH //
5.59" (14.2 cm)

MODES //
High / Low / Flashing



202
LUMENS

7h
RUN TIME

UP TO

5010

LIGHT SOURCE //
LED

BATTERIES //
2 AA Alkaline (included)

LENGTH //
6.26" (15.9 cm)

MODES //
High / Low / Flashing



392
LUMENS

26h
RUN TIME

UP TO

5020

LIGHT SOURCE //
LED

BATTERIES //
4 AAA Alkaline (included)

LENGTH //
5.87" (14.9 cm)

MODES //
High / Medium / Low / Flashing



586
LUMENS

27h
RUN TIME

UP TO

5050R

LIGHT SOURCE //
LED

BATTERIES //
Lithium-Ion (included)

LENGTH //
6.16" (15.6 cm)

MODES //
Boost / High / Low / Flashing



883
LUMENS

40h
RUN TIME

UP TO



Includes USB power output to charge devices.



SPECIALTY LIGHTS

Whether directing fighter jets on the deck of aircraft carrier or protecting our troops with friend-or-foe infrared beacons, Pelican manufactures quality lighting tools for many unique military applications. Also available: magnetically secured flexible neck designs for mechanics and red LED flashers that are helpful in keeping workers safe.

MINI FLASHER™ 2130

LIGHT SOURCE //
LED
BATTERIES //
2 L1154 Alkaline (included)
LENGTH //
1.73" (4.4 cm)



MINI FLASHER™ 2130IR

LIGHT SOURCE //
LED (Infrared)
BATTERIES //
2 L1154 Alkaline (included)
LENGTH //
1.73" (4.4 cm)



2490 (WITH TRAFFIC WAND)

LIGHT SOURCE //
Recoil™ LED
BATTERIES //
4 AA Alkaline (not included)
LENGTH //
12.5" (31.7 cm)



64
LUMENS

12h
RUN TIME


2365 FLEX NECK

LIGHT SOURCE //
LED
BATTERIES //
2 AA Alkaline (not included)
LENGTH //
21.92" (55.7cm)



65
LUMENS

7h
RUN TIME



RALS

REMOTE AREA LIGHTING SYSTEMS

Providing increased performance, safer working conditions, emergency preparedness and greater flexibility, Pelican's RALS line is the modern alternative to generator based lighting:

- Silent performance
- No flammable fuel
- Eliminated trip hazards
- No exhaust fumes
- Remote activation
- Little to no heat

9430 RALS



LIGHT SOURCE // LED
BATTERIES // Sealed Lead Acid
DIMENSIONS // 15.75" (40 cm) Closed,
 32.28" (82 cm) Extended
MODES // High / Low
BEAM SPREAD // 125°, 6 LEDs



1600
LUMENS

15h
RUN TIME

UP TO

9430SL SPOT LIGHT RALS



LIGHT SOURCE // LED
BATTERIES // Sealed Lead Acid
DIMENSIONS // 15.75" (40 cm) Closed,
 32.28" (82 cm) Extended
MODES // High / Low
BEAM SPREAD // 10°, 24 LEDs



2000
LUMENS

15h
RUN TIME


UP TO

9600 RALS

LIGHT SOURCE // LED
INPUT VOLTAGE // 110v - 240v
DIMENSIONS //
 Light Head - 18.31" x 8.27" x 4.72" (46.5 x 21 x 12 cm)
 Extended - 120" (304.8 cm) [with base & pole]
BEAM SPREAD // 125°, 14 LEDs



* Shown with base & pole accessories

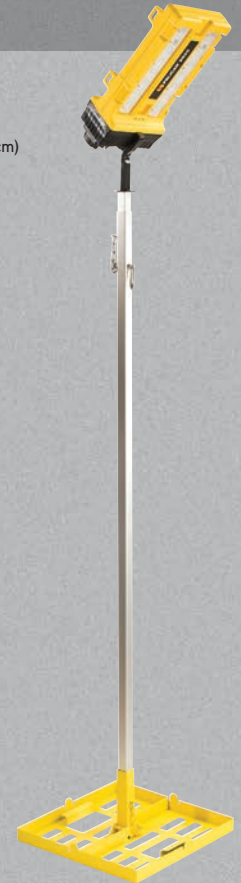

9440 RALS



LIGHT SOURCE // LED
BATTERIES // Lithium-Ion
DIMENSIONS // 37.4" (95 cm) Closed,
 85" (215.8 cm) Extended
MODES // High / Medium / Low
BEAM SPREAD // 120°, 10 LEDs



5300
LUMENS

8h
RUN TIME

UP TO

9455 SAFETY LIGHT RALS



LIGHT SOURCE // LED
BATTERIES // NiMH
DIMENSIONS // 15.35" (39 cm) Closed,
 31.50" (80 cm) Extended
MODES // High / Low / Flashing
BEAM SPREAD // 125°, 10 LEDs
CERTIFICATIONS // CI, D1, IECEx ia,
 ATEX Zone 0



1600
LUMENS


10h
RUN TIME

UP TO

9500 SHELTER LIGHTING SYSTEM

LIGHT SOURCE // LED
INPUT VOLTAGE // 110-240vac
DIMENSIONS // 20.62" (52.4 cm) Closed, 157.5" (399.9 cm) Extended
LIGHT OUTPUT // 6000 (White LED) Per Head, 1200 (Red LED) Per Head
BEAM SPREAD // 210° Diffused, 36 LEDs per head (24 White/12 Red),
 3 lamp heads
PELICAN CASE // Included

Select between white light or red night vision mode

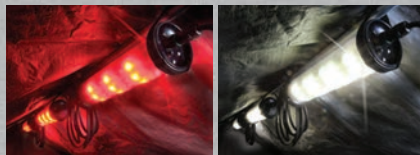

6000
LUMENS

UP TO



Chain up to 34 Pelican™ 9600 LED
 Modular Light heads together.



9460/9460M RALS



LIGHT SOURCE // LED

BATTERIES // Sealed Lead Acid

DIMENSIONS // 23.25" (59.1 cm) Closed,
79.50" (201.9 cm) Deployed

MODES // Variable Light Output / Flashing / 3 Preset Levels

BEAM SPREAD // 120°, 10 LEDs per head, 2 lamp heads



INTELLIGENT CONTROL SYSTEM

calculates and displays current battery life, allowing the user to regulate the intensity of the light and choose the desired run time.

12000
LUMENS

24h
RUN TIME

UP TO




9460




9460M

9460, 9460M, 9470, 9470M RALS FEATURES



12V POWER SUPPLY WITH DUAL USB ADAPTER

12 volt power supply port can be used to power any electrical product that utilizes a standard 12v vehicle style connector (up to 4 amps) or a variety of USB connections.



MULTI-TERRAIN TROLLEY (ONLY ON 9460M, 9470M RALS)

Large 1.5 inch polyurethane wheels allow for easier transport across rough surfaces. Molded feet level and stabilize case.

9470/9470M RALS



LIGHT SOURCE // LED

BATTERIES // Sealed Lead Acid

DIMENSIONS // 24.75" (62.9 cm) Closed,
80.00" (208.3 cm) Deployed

MODES // Variable Light Output / Flashing / 3 Preset Levels

BEAM SPREAD // 120°, 10 LEDs per head, 4 lamp heads



INTELLIGENT CONTROL SYSTEM

calculates and displays current battery life, allowing the user to regulate the intensity of the light and choose the desired run time.

24000
LUMENS

24h
RUN TIME

UP TO



9470



9470M

9480 RALS

LIGHT SOURCE // LED

BATTERIES // Sealed Lead Acid

DIMENSIONS // 15.50" (39.4 cm) Closed,
23.75" (60.3 cm) Deployed

MODES // High / Medium / Low / Flashing

BEAM SPREAD // 125°, 8 LEDs



4000

LUMENS

28h

RUN TIME

UP TO



SWAPPABLE POWER PACK

Swappable power pack
w/12v aux. port adapter
powers smartphones,
laptops, etc.

9490 RALS

LIGHT SOURCE // LED

BATTERIES // Sealed Lead Acid

DIMENSIONS // 20" (50.8 cm) Closed,
72" (182.9 cm) Deployed

MODES // High / Medium / Low / Flashing / (6000-Variable)

BEAM SPREAD // 125°, 10 LEDs



INTELLIGENT CONTROL SYSTEM

calculates and displays current battery life,
allowing the user to regulate the intensity of
the light and choose the desired run time.

6000

LUMENS

24h

RUN TIME

UP TO



BATTERY LEVEL INDICATOR

Full time battery
level indication.



HOLSTERS & WAND ACCESSORIES

						
CAT. NO. (Description)	2407 Nylon Holster	7077 Plain Leather Holster	7078 Nylon Holster	7106 Nylon Holster	7108 Composite Holster	7116 Nylon Holster
COMPATIBLE LIGHTS	2410 2410PL 2460	7060	7060	7100	7100 7110	7110

							
CAT. NO. (Description)	7606 Nylon Holster	7607 Nylon Holster / Wand Kit	7608 Composite Holster	7616 Nylon Holster	7617 Nylon Holster / Wand Kit	7627 Nylon Holster / Wand Kit	8057 Nylon Holster
COMPATIBLE LIGHTS	7600	7600	7600 7610 7620	7610	7610	7620	8050



SPECIFICATIONS

	CAT NO.	BATTERIES (included unless noted)	WEIGHT W/ BATTERIES (KG)	LENGTH (CM)	ANSI LIGHT OUTPUT	ANSI RUN TIME	ANSI BEAM DISTANCE (meters)	ANSI PEAK BEAM INTENSITY (candela)	ANSI IPX RATING	CERTIFICATIONS	COLORS
SAFETY CERTIFIED LIGHTS	1830	3 AAAA Alkaline	1.2 oz. (0.03)	6.2" (15.7)	5	32h	13	44	IPX4	CI, D1	■
	1930	4 LR 44 Alkaline	0.9 oz. (0.03)	2.64" (6.7)	12	4h 15m	17	70	IPX4	CI, D1/CI II, D2 IECEX ia	■ ■
	1965	2 AAA Alkaline	1.9 oz. (0.05)	5.48" (13.9)	87	2h 30m	41	429	IPX7	CI II III, D1	■ ■
	1975	2 AAA Alkaline	1.9 oz. (0.05)	5.75" (14.6)	117	2h 15m	24	141	IP68	CI II III, D1	■
	1975i	2 AAA Alkaline	1.9 oz. (0.05)	5.75" (14.6)	117	2h 15m	24	141	IP68	IECEX ia	■
	2010	3 C Alkaline (not included)	13.4 oz. (0.38)	8.11" (20.6)	161	22h	160	6398	IPX7	CI II III, D1	■ ■
	2010PL	3 C Alkaline (not included)	13.4 oz. (0.38)	8.11" (20.6)	161	22h	160	6398	IPX7	CI II III, D1	■
	2220	2 CR2032 Lithium	1 oz. (0.03)	3.5" (8.9)	9	34h	12	38	IPX4	CI, D1	■
	2315	2 AA Alkaline	4.6 oz. (0.13)	6.22" (15.8)	115	6h	75	1403	IPX8	CI II III, D1, IECEX ia	■
	2410	4 AA Alkaline	7.3 oz. (0.21)	7" (17.8)	183	5h 45m	184	8480	IPX7	CI II III, D1 IECEX ia	■ ■
	2410PL	4 AA Alkaline	7.3 oz. (0.21)	7" (17.8)	183	5h 45m	184	8480	IPX7	CI II III, D1 IECEX ia	■
	2460	4 Rechargeable NiMH	7.8 oz. (0.22)	7" (17.8)	183	5h	179	8050	IPX7	CI II, D2	■
	3315	3 AA Alkaline	6.2 oz. (0.18)	6.14" (15.6)	160	19h	144	5153	IP67	CI II III, D1 IECEX ia	■ ■
	3315PL	3 AA Alkaline	6.2 oz. (0.18)	6.14" (15.6)	160	19h	144	5153	IP67	CI II III, D1 IECEX ia	■ (photoluminescent)
	3325	3 AA Alkaline	6.1 oz. (0.17)	6.06" (15.4)	171	16h	136	4558	IPX7	CI II II, D1 IECEX ia	■
	3345	3 AA Alkaline (not included)	7.5 oz. (0.21)	7.25" (18.4)	280 ^{S/F} , 117 ^F , 219 ^S	7h ^{S/F} , 14h ^F , 12h ^S	126 ^{S/F} , 16 ^F , 137 ^S	3990 ^{S/F} , 60 ^F , 4724 ^S	IPX7	CI II III, D1 IECEX ia	■
	9415	4 Rechargeable NiMH	49.3 oz. (1.4)	8.75" (22.2)	588*, 224***	4h 30m*, 11h 30m***	288*, 176***	20792*, 7787***	IPX4	CI, D1	■
	9415i	4 Rechargeable NiMH	58.2 oz. (1.65)	8.75" (22.2)	392*, 144***	4h 30m*, 11h***	392*, 234***	32767*, 13747***	IPX4	IECEX ia, ATEX Zone 0	■

*High | ***Low | ^S Spot | ^F Flood | Additional approvals may apply. For details go to www.pelican.com

	CAT NO.	BATTERIES (included unless noted)	WEIGHT W/ BATTERIES (KG)	LENGTH (CM)	ANSI LIGHT OUTPUT	ANSI RUN TIME	ANSI BEAM DISTANCE (meters)	ANSI PEAK BEAM INTENSITY (candela)	ANSI IPX RATING	CERTIFICATIONS	COLORS
SAFETY CERTIFIED RIGHT ANGLE & ARTICULATING LIGHTS	3415 / 3415M	3 AA Alkaline (not included)	9.0 oz. (0.25)	7.44" (18.9)	336 ^{S/F} , 177 ^F , 186 ^S	6h ^{S/F} , 15h ^F , 14h ^S	133 ^{S/F} , 37 ^F , 135 ^S	4418 ^{S/F} , 336 ^F , 4544 ^S	IPX8	CI II III, D1, IECEx ia	■
	3610	4 AA Alkaline	10.5 oz. (0.3)	7.51" (19.1)	183	5h 45m	184	8480	IPX7	CI II III, D1, IECEx ia	■
	3610PL	4 AA Alkaline	10.5 oz. (0.3)	7.51" (19.1)	183	5h 45m	184	8480	IPX7	CI II III, D1, IECEx ia	■
	3715	4 AA Alkaline (not included)	14.4 oz. (0.41)	5.36" (13.6)	233*, 113***, 31****	4h*, 7h***, 31h****	293*, 187***, 30****	21440*, 8775***, 220****	IPX4	CI, D1, IECEx ia	■
	3715PL	4 AA Alkaline (not included)	14.4 oz. (0.41)	5.36" (13.6)	233*, 113***, 31****	4h*, 7h***, 31h****	293*, 187***, 30****	21440*, 8775***, 220****	IPX4	CI, D1, IECEx ia	■
	3765	4 Rechargeable NiMH	14.6 oz. (0.41)	5.36" (13.6)	237*, 113***, 32****	3h*, 6h 30m***, 14h****	301*, 193***, 28****	22720*, 9354***, 192****	IPX4	CI, D1	■
	3765PL	4 Rechargeable NiMH	14.6 oz. (0.41)	5.36" (13.6)	237*, 113***, 32****	3h*, 6h 30m***, 14h****	301*, 193***, 28****	22720*, 9354***, 192****	IPX4	CI, D1	■
SAFETY CERTIFIED HEADLAMPS	2610	3 AAA Alkaline	3.2 oz. (0.09)	1.49" (3.8)	30*, 14***	19h*, 47h***	28*, 19***	194*, 91***	IPX4	CI, D1, IECEx ia	■
	2690	3 AAA Alkaline	4.1 oz. (0.12)	2.81" (7.1)	74	11h	92	2124cd	IPX7	CI II III, D1, IECEx ia	■
	2745	3 AAA Alkaline	3.3 oz. (0.09)	2.25" (5.7)	33*, 17***	20h*, 40h***	35*, 25***	309*, 155***	IP54	CI, D1, IECEx ia	■ ■
	2755	3 AAA Alkaline	3.4 oz. (0.1)	2.25" (5.7)	118*, 60***	7h 30m*, 16**	60*, 43***	910*, 454***	IP54	CI, D1, IECEx ia	■ ■
	2765	3 AAA Alkaline	3.4 oz. (0.1)	2.25" (5.7)	155*, 132**, 78***, 34****	6h 15m*, 5h 30m**, 8h***, 14h****	107*, 93**, 63***, 9****	2876*, 2163**, 978***, 18****	IP54	CI, D1, IECEx ia	■ ■
	2785	4 AA Alkaline	8.8 oz. (0.25)	3" (7.6)	215*, 106**, 22***	5h*, 13h**, 98h***	108*, 76**, 34***	2911*, 1445**, 290***	IP54	CI, D1, IECEx ia	■ ■
HIGH PERFORMANCE LIGHTS	1810	4 LR 41 Alkaline	0.5 oz. (0.01)	1.5" (3.8)	16	8h 45m	23	137	IPX4	N/A	■
	1910	1 AAA Alkaline	1.5 oz. (0.04)	3.8" (9.6)	106*, 21***	2h 30m*, 4h***	55*, 24***	765*, 140***	IPX7	N/A	■
	1920	2 AAA Alkaline	2.2 oz. (0.06)	5.5" (14)	224*, 22***	2h 15m*, 8h 45m***	81*, 25***	1640*, 152***	IPX7	N/A	■
	1970	2 AAA Alkaline	1.8 oz. (0.05)	5.75" (14.6)	139	4h 15m	29	205	IPX4	N/A	■
	2310	2 AA Alkaline	4.6 oz. (0.13)	6.22" (15.8)	350*, 25***	2h 15m*, 27h***	134*, 36***	4516*, 324***	IPX8	N/A	■
	3310PL	3 AA Alkaline	6.2 oz. (0.18)	6.14" (15.6)	378*, 39***	8h*, 202h***	196*, 62***	9580*, 961***	IPX8	N/A	■ (photoluminescent)
	3310ELS	3 AA Alkaline	6.2 oz. (0.18)	6.14" (15.6)	378*, 39***	8h*, 202h***	196*, 62***	9580*, 961***	IPX8	N/A	■ (photoluminescent)
	3410 / 3410M	3 AA Alkaline (not included)	9.2 oz. (0.26)	7.44" (18.9)	653*, 97**, 25***	5h*, 19h*, 61h*	184*, 67**, 34***	8504*, 1129**, 292***	IPX8	N/A	■ (photoluminescent)
	9410L	6 Rechargeable Lithium-Ion	44.7 oz. (1.27)	8.75" (22.2)	2207*, 463***	3h 15m*, 11h***	453*, 207***	51304*, 10710***	IPX4	N/A	■ ■

*High | **Medium | ***Low | ****Downcast | ^S Spot | ^F Flood | Additional approvals may apply. For details go to www.pelican.com

SPECIFICATIONS

	CAT NO.	BATTERIES (included unless noted)	WEIGHT W/ BATTERIES (KG)	LENGTH (CM)	ANSI LIGHT OUTPUT	ANSI RUN TIME	ANSI BEAM DISTANCE (meters)	ANSI PEAK BEAM INTENSITY (candela)	ANSI IPX RATING	CERTIFICATIONS	COLORS
HIGH PERFORMANCE TACTICAL LIGHTS	2350	1 AA Alkaline	3.4 oz. (0.1)	4.23" (10.7)	178*, 15***	2h 15m*, 21h***	130*, 37***	4196*, 345***	IPX7	N/A	■
	2360	2 AA Alkaline	5.4 oz. (0.15)	6.2" (15.7)	375*, 29***	2h 30m*, 13h***	192*, 53***	9187*, 705***	IPX8	N/A	■
	2370	2 AA Alkaline	6.5 oz. (0.18)	6.43" (16.3)	358*, 35***	2h*, 11h***	190*, 57***	9000*, 823***	IPX7	N/A	■
	7000	2 CR123 Lithium	5.6 oz. (0.16)	5.31" (13.5)	774*, 457**, 99***	1h 15m*, 1h 45m**, 13h***	246*, 176**, 83***	14768*, 7712**, 1738***	IPX7	N/A	■
	7060	1 Rechargeable Lithium-Ion	10.4 oz. (0.29)	8.65" (22)	535*, 218**, 26***	3h 45m*, 12h**, 68h***	207*, 131**, 44***	10707*, 4297**, 481***	IPX4	N/A	■
	7100	1 Rechargeable Lithium-Ion	4.4 oz. (0.13)	5.12" (13)	695*, 348**, 33***	1h 15m*, 1h 30m**, 9h 15m***	194*, 130**, 38***	9413*, 4247**, 358***	IPX8	N/A	■
	7110	1 AA Alkaline (included) or 1 CR123 (not included)	4.1 oz. (0.12)	4.63" (11.8)	445*, 214**, 23***	1h*, 1h 30m**, 13h***	93*, 62**, 20***	6053*, 2695**, 288***	IPX8	N/A	■
	7600	1 Rechargeable Lithium-Ion	6.9 oz. (0.20)	6.19" (15.7)	944*, 479**, 37***	3h 15m*, 4h 30m**, 29h***	225*, 157**, 44***	12693*, 6172**, 480***	IPX8	N/A	■
	7610	1 AA Alkaline (included) or 2 CR123 (not included)	5.5 oz. (0.16)	5.44" (13.8)	1018*, 531**, 25***	1h 30m*, 2h**, 33h***	227*, 151**, 33***	12856*, 5674**, 273***	IPX8	N/A	■
	7620	2 AA Alkaline (included) or 3 CR123 (not included)	6.9 oz. (0.20)	6.75" (17.1)	1124*, 528**, 28***	2h*, 3h**, 37h***	243*, 155**, 35***	14824*, 5974**, 315***	IPX8	N/A	■
	8060	4 Rechargeable NiMH	23.2 oz. (0.66)	12.67" (32.2)	1072*, 551**, 29***	3h 45m*, 4h 15m**, 60h***	376*, 265**, 60***	35300*, 17520**, 889***	IPX6	N/A	■
HIGH PERFORMANCE HEADLAMPS	2720	3 AAA Alkaline	3.8 oz. (0.11)	2.48" (6.3)	200*, 12***	3h*, 103h***	82*, 20***	1684*, 103***	IPX4	N/A	■
	2740	3 AAA Alkaline	3.3 oz. (0.09)	2.25" (5.7)	66*, 36***	7h 15m*, 21h***	22*, 16***	122*, 68***	IPX4	N/A	■
	2750	3 AAA Alkaline	3.4 oz. (0.1)	2.25" (5.7)	259*, 71***	2h 30m*, 11h***	90*, 48***	2041*, 573***	IPX4	N/A	■ (photoluminescent)
	2760	3 AAA Alkaline	3.4 oz. (0.1)	2.25" (5.7)	289*, 156**, 97***, 42***	1h 30m*, 3h 15m**, 5h 30m***, 11h****	101*, 66**, 48***, 19****	2540*, 1097**, 567***, 88****	IPX4	N/A	■
	2780	4 AA Alkaline	8.8 oz. (0.25)	3" (7.6)	430*, 203**, 53***	1h 30m*, 3h**, 12h***	124*, 81**, 27***	3868*, 1625**, 425***	IPX7	N/A	■ (photoluminescent)
	2780R	1 Rechargeable Lithium-Ion	7.3 oz. (0.21)	3" (7.6)	558*, 213**, 95***	2h*, 3h**, 7h 30m***	127*, 78**, 53***	4060*, 1540**, 695***	IPX7	N/A	■ (photoluminescent)
CORRECT COLOR LIGHTS	2750CC	3 AAA Alkaline	3.4 oz. (0.10)	2.25" (5.7)	183*, 50***	2h 30m*, 11h***	63*, 31***	989*, 240***	IPX4	N/A	■ (photoluminescent)
	2755CC	3 AAA Alkaline	3.4 oz. (0.10)	2.25" (5.7)	72*, 36***	6h 45m*, 15h***	50*, 35***	632*, 302***	IP54	CI D1, IECEx ia	■
	3310CC	3 AA Alkaline	6.2 oz. (0.18)	6.14" (15.6)	283*, 31***	8h*, 175h***	169*, 50***	7150*, 625***	IPX8	N/A	■ (photoluminescent)
	3315CC	3 AA Alkaline	6.2 oz. (0.18)	6.14" (15.6)	130	16h 30m	110	3042	IP67	CI II III, D1, IECEx ia	■
	3410MCC	3 AA Alkaline (not included)	9.2 oz. (0.26)	7.44" (18.9)	484*, 64**, 17***	4h*, 20h**, 67h***	155*, 56**, 29***	5991*, 796**, 205***	IPX8	N/A	■ (photoluminescent)
	3415MCC	3 AA Alkaline (not included)	9.0 oz. (0.25)	7.44" (18.9)	258 ^{S/F} , 127 ^F , 144 ^S	5h ^{S/F} , 13h ^F , 13h ^S	111 ^{S/F} , 30 ^F , 109 ^S	3109 ^{S/F} , 231 ^F , 2998 ^S	IPX8	ETL, CI II III, D1, IECEx ia	■

*High | **Medium | ***Low | ****Downcast | Additional approvals may apply. For details go to www.pelican.com

	CAT NO.	BATTERIES (included unless noted)	WEIGHT W/ BATTERIES (KG)	LENGTH (CM)	ANSI LIGHT OUTPUT	ANSI RUN TIME	ANSI BEAM DISTANCE (meters)	ANSI PEAK BEAM INTENSITY (candela)	ANSI IPX RATING	CERTIFICATIONS	COLORS
5 SERIES LIGHTS	5000	2 AAA Alkaline	2.4 oz. (0.07)	5.59" (14.2)	202*, 21***	1h 15m*, 7h***	69*, 21***	1176*, 111***	IPX8	N/A	■
	5010	2 AA Alkaline	5.1 oz. (0.15)	6.26" (15.9)	392*, 22***	2h 15m*, 26h***	184*, 43***	8507*, 452***	IPX8	N/A	■
	5020	4 AAA Alkaline	7.3 oz. (0.21)	5.87" (14.9)	586*, 217**, 20***	1h*, 2h 30m**, 27h***	250*, 147**, 44***	15672*, 5368**, 480***	IPX8	N/A	■
	5050R	1 Rechargeable Lithium-Ion	5.8 oz. (0.16)	6.16" (15.6)	883 ^B , 393*, 21***	N/A ^B , 2h 30m*, 40h***	201 ^B , 134*, 30***	10093 ^B , 4488*, 224***	IPX8	N/A	■
SPECIALTY LIGHTS	2130	2 L1154 Alkaline	0.5 oz. (0.01)	1.73" (4.4)	4.7 (non ANSI)	130h (non ANSI)	N/A	N/A	IPX7	N/A	■
	2130IR	2 L1154 Alkaline	0.5 oz. (0.01)	1.73" (4.4)	N/A	65h (non ANSI)	N/A	N/A	IPX7	N/A	■
	2365	2 AA Alkaline (not included)	9.3 oz. (0.26)	21.92" (55.7)	65	7h	81	1644	IPX4	N/A	■
	2490	4 AA Alkaline (not included)	8.2 oz. (0.23)	12.5" (31.7)	64	12h	118	3459	IPX7	N/A	□

	CAT. NO.	BATTERIES (included)	WEIGHT W/ BATTERIES (KG)	LENGTH (CM)	LUMENS	RUN TIME	BEAM SPREAD	NUMBER OF LEDs	LAMP HEADS	CERTIFICATIONS	COLORS
REMOTE AREA LIGHTING SYSTEMS	9430	Rechargeable, Sealed Lead Acid	22.65 lbs. (10.27)	32.28" (82) ^A	3000*, 1500***	8h*, 15h***	125°	6	1	N/A	■ ■
	9430SL	Rechargeable, Sealed Lead Acid	22.05 lbs. (10)	32.28" (82) ^A	2000*, 1000***	8h*, 15h***	10°	24	1	N/A	■
	9440	Rechargeable Lithium ion	16.09 lbs. (7.3)	85" (215.8) ^A	5300*, 2800**, 1400***	1h 30m*, 4h** 8h***	125°	12	1	N/A	■ ■
	9455	Rechargeable NiMH	16 lbs. (7.3)	31.50" (80) ^A	1600*, 800***	5h*, 10h***	125°	10	1	CI D1, IECEx ia, ATEX Zone 0	■ High Visibility Yellow
	9460	Rechargeable, Sealed Lead Acid	61 lbs. (27.7)	79.50" (201.9) ^A	12,000 (variable)	3h*, 24h***	120°	10 per head	2	N/A	■ ■
	9460M	Rechargeable, Sealed Lead Acid	64 lbs. (24.95)	79.50" (201.9) ^A	12,000 (variable)	3h*, 24h***	120°	10 per head	2	N/A	■ ■
	9470	Rechargeable, Sealed Lead Acid	105 lbs. (47.6)	82.00" (208.3) ^A	24,000 (variable)	2h 45m*, 24h***	120°	10 per head	4	N/A	■ ■
	9470M	Rechargeable, Sealed Lead Acid	108lbs. (49)	82.00" (208.3) ^A	24,000 (variable)	2h 45m*, 24h***	120°	10 per head	4	N/A	■ ■
	9480	Rechargeable, Sealed Lead Acid	27.5 lbs. (12.47)	23.75" (60.3) ^A	4000*, 3000** 1000***	6h*, 8h** 28h***	125°	8	1	N/A	■ ■
	9490	Rechargeable, Sealed Lead Acid	32 lbs. (14.51)	72" (182.8) ^A	6000 (variable)	3h 30m*, 12h** 24h***	125°	10	1	N/A	■ ■
	9500	N/A	29.8 lbs. (13.52)	20.62" (52.4)	6000 (white LED) 1200 (red LED)	constant	210° (diffused)	36 per head	3	N/A	■
	9600	N/A	9.04 lbs. (4.1)	120" (304.8) ^A	3000	constant	125°	14	1	N/A	■

*High | **Medium | ***Low | ^B Boost | ^S Spot | ^F Flood | ^A Extended Height | Additional approvals may apply. For details go to www.pelican.com

CUSTOM LABELS

Pelican Products offers the ultimate in private labeling. You can put your company name and logo or a special statement on many Pelican™ lights. Our in-house private label molding and production department has complete short and long run capabilities for a variety of custom applications and custom colors. We have the latest hot stamping equipment, utilizing the world's most durable inks and foils in our screening, hot tipping, embossing, and molding programs. Laser etching is also available for many of the metal bodied lights



GRAPHIC DESIGN STUDIO

Our in-house graphics studio will take your logo and size it appropriately to the flashlight of your choice.




HOT STAMPING

Our hot stamping department is equipped with the latest technology in custom imprinting. Minimum quantities apply.



LASER ETCHING

Available only on metal bodied lights.

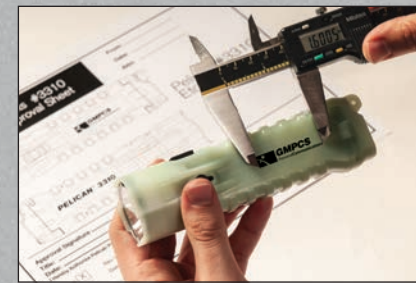

100% ACCURACY

Pelican's strict QA inspection team will check for quality of print and 100% accuracy in color and placement.

PELICAN LIGHTING TOOLS: MORE THAN JUST FLASHLIGHTS.

Here are just a few features that
make our lighting tools shine:



**PHOTOLUMINESCENT
DESIGNS**
(on select models only)




**BATTERY LEVEL
INDICATION**
(on select models only)



**INTELLIGENT
CONTROL**
(on select models only)




SELF-PROGRAMMABLE
(on select models only)



**DOWNCAST
LIGHTING FEATURES**
(on select models only)



**GESTURE
ACTIVATION**
(on select models only)



CONVENTIONAL
FLASHLIGHTS

CORRECT COLOR
TECHNOLOGY

**CORRECT COLOR
(HIGH CRI)**



**LIMITED LIFETIME
WARRANTY**



FLASHLIGHTS/HEADLAMPS

PELICAN LIMITED LIFETIME GUARANTEE OF EXCELLENCE

Pelican Products, Inc. ("Pelican") guarantees its lights for a lifetime against breakage or defects in workmanship. This guarantee does not cover the lamp or batteries. Pelican will either repair or replace any defective product, at our sole option. All warranty claims of any nature are barred if the product has been altered, damaged or in any way physically changed, or subjected to abuse, misuse, negligence or accident.

Lifetime warranty does not cover Remote Area Lighting Systems products.

In Australia: www.pelican.com/warranty/

For complete warranty details: www.pelican.com/warranty/

REMOTE AREA LIGHTING SYSTEMS

1 YEAR LIMITED WARRANTY

Pelican Products, Inc. ("Pelican") guarantees its Remote Area Lighting Systems (RALS) against defects in materials and workmanship under normal use, service, and maintenance for a period of one year from the date of purchase. With valid dated proof of purchase, Pelican will either repair or replace any defective product, at our sole option. All warranty claims of any nature are barred if the product has been altered or in any way physically changed, or subjected to abuse, misuse, negligence or accident.

In Australia: www.pelican.com/warranty/

For complete warranty details: www.pelican.com/warranty/

U.S.A.

CALIFORNIA

23215 Early Avenue
Torrance, CA 90505
Tel: 310.326.4700
800.473.5422
Fax: 310.326.3311
www.pelican.com

MASSACHUSETTS

147 North Main Street
South Deerfield, MA 01373
Tel: 800.542.7344
Fax: 413.665.8330
www.pelican.com

MINNESOTA

Pelican BioThermal Headquarters
10050 89th Ave N
Maple Grove, MN 55369
Tel: 763.412.4800
877.537.9800
www.pelicanbiothermal.com

INTERNATIONAL

AUSTRALIA

Pelican Products Pty Ltd
West Wing, Platinum Building,
Suite 2.33, 4 Ilya Av
Erina NSW 2250
Tel: +612 4367 7022
Fax: +612 4367 7066
www.pelicanaustralia.com

CANADA

Pelican Products ULC
10221-184th Street
Edmonton, Alberta
T5S 2J4 Canada
Tel: +780 481 6076
Fax: +780 481 9586
www.pelican.com/ca

CHINA

Pelican Products China Representative Office
Pine City Building, Room 1026
777 Zhaojiabang Road
Shanghai, China 200032
Tel: +86 21 64189685
Fax: +86 21 64189679
www.pelican.com/cn

EUROPE, MIDDLE EAST AND AFRICA

Peli Products, S.L.U.
c/ Provença, 388, Planta 7
08025 · Barcelona, Spain
Tel: +34 934 674 999
Fax: +34 934 877 393
www.peli.com

KOREA

Pelican Products Korea Ltd
#909 Hyundai 41 Tower, #2616
917-9, Mok-dong, Yangchon-gu,
Seoul, Korea 158-050
Tel: +82 2 6092 4700
Fax: +82 2 6739 4700

JAPAN

Pelican Products K.K.
Nisso 22 Bldg 9F
1-11-10 Azabu Dai
Minato ward Tokyo
106-0041 Japan
Tel: +81 33 585 9100
Fax: +81 33 585 9109
www.pelican.com/jp

LATIN AMERICA

23215 Early Avenue
Torrance, California 90505 USA
Tel: +1 310-326-4700 x 1462
Fax: +1 310-325-5740
www.pelican.com

SE ASIA and Rest of ASIA (Hong Kong, Macau, Taiwan, Pakistan)

19 Tukang Innovation Drive
Greenhub #04-01
Singapore 618301
tel: +65 9298 3322
www.pelican.com

DISTRIBUTED BY:

IDEMCO

W : www.idemcosb.com.my
E : idemco@idemcosb.com.my
T : +6 03-7781 7973



©2022 Pelican Products, Inc.

UNITED is a registered trademark of United Airlines, Inc. NYPD is a trademark of the City of New York. All other trademarks are registered and/or unregistered trademarks of Pelican Products, Inc., its subsidiaries and/or affiliates.