




IDEMCO



2021 PELICAN™ LIGHTS CATALOG

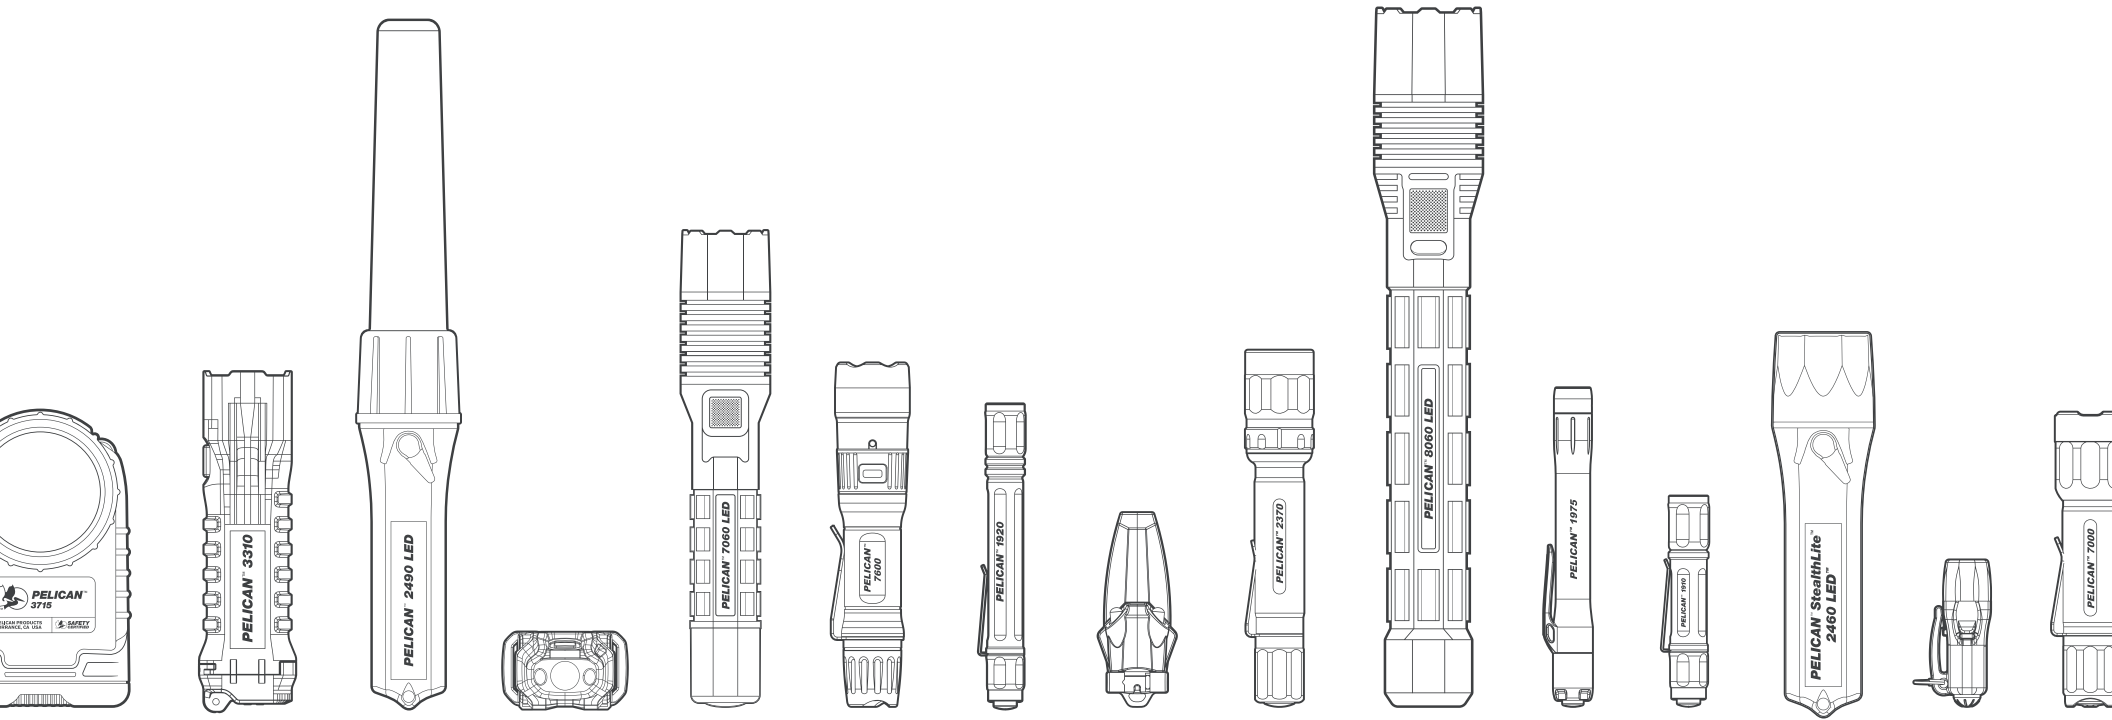

# PELICAN LIGHTS

<b>SAFETY CERTIFIED LIGHTS</b> PGS 3 - 6																										
1930	2220	1830	1965	1975 <b>NEW</b>	1975i <b>NEW</b>	2010	2010PL	2315 <b>NEW</b>	2410	2410PL	2460	3315	3315PL	3325	3345	9415	9415i									
<b>SAFETY CERTIFIED RIGHT ANGLE &amp; ARTICULATING LIGHTS</b> PGS 7 - 8										<b>SAFETY CERTIFIED HEADLAMPS</b> PGS 9 - 10																
3415	3415M	3610	3610PL	3715	3715PL	3765	3765PL									2610	2690	2745	2755	2765	2785					
<b>HIGH PERFORMANCE LIGHTS</b> PGS 11 - 12										<b>HIGH PERFORMANCE TACTICAL LIGHTS</b> PGS 13 - 14																
1810	1910	1920	1970 <b>NEW</b>	2310 <b>NEW</b>	3310PL	3310ELS	3410	3410M	9410L	2350	2360	2370	7000	7060	7100	7110	7600	7610	7620	8060						
<b>HIGH PERFORMANCE HEADLAMPS</b> PGS 15 - 16										<b>CORRECT COLOR LIGHTS</b> PGS 19 - 20					<b>5 SERIES LIGHTS</b> PGS 21 - 22											
2720	2740	2750	2760	2780	2780R	2750CC	2755CC	3310CC	3315CC	3410CC	3415CC	5000	5010	5020	5050R											
<b>SPECIALTY LIGHTS</b> PGS 23 - 24				<b>REMOTE AREA LIGHTING SYSTEMS</b> PGS 25 - 28																						
2130	2130IR	2365	2490	9430	9430SL	9440	9455	9460	9460M	9470	9470M	9480	9490	9500	9600											





DEAR PELICAN CUSTOMER,

After over 45 years in business, Pelican Products, Inc. understands the critical importance of lighting tools. As an avid diver since age 11, our founder recognized the need for rugged flashlights that would work underwater and would not fail. Pelican has since grown to provide a wide range of advanced lighting systems to support professionals and outdoor enthusiasts alike.

Our lighting products lead the industry in LED light output performance, and we offer more safety approved industrial lights certified for Class I, II, III Div 1 and groups ABCDEFG than any of our competitors. With a lighting product line ranging from compact to large, headlamps to right angle lights, tactical to remote area lighting, dive lights and everything in between, we are confident you will find the perfect model to fit your needs. Our lighting tools are unbeatable in lumens, longevity, and energy efficiency, plus every Pelican light boasts our world-famous Guarantee of Excellence.

We take great pride in the products we've created over the years for law enforcement, firefighters, military personnel, photographers and many others who have counted on the Pelican name. We would not be the global brand that we are today without the consistent support of our loyal customers.

On behalf of myself and my fellow Pelican employees around the world, we thank you for your business.

Sincerely,

Phil Gyori  
Chief Executive Officer



1976 - ORIGINAL SABRELITE™

MARKETS SERVED //

**FIRE**  
**MILITARY**  
**INDUSTRIAL**  
**LAW ENFORCEMENT**  
**OUTDOOR**  
**CONSUMER**



# TABLE OF CONTENTS

- PERFORMANCE & SAFETY 1
- SAFETY CERTIFIED LIGHTS 3
  - Right Angle & Articulating Lights 7
  - Headlamps 9
- HIGH PERFORMANCE LIGHTS 11
  - Tactical Lights 13
  - Headlamps 15
- PHOTOLUMINESCENT LIGHTS 17
- CORRECT COLOR™ LIGHTS 19
- 5 SERIES LIGHTS 21
- SPECIALTY LIGHTS 23
- REMOTE AREA LIGHTING SYSTEMS 25
- HOLSTERS & WAND ACCESSORIES 29
- SPECIFICATIONS 31
- CUSTOM LABEL | LIGHTING FEATURES 35



# PERFORMANCE

## ANSI STANDARDS (AMERICAN NATIONAL STANDARDS INSTITUTE)

Why create standards? While Pelican was one of the first manufacturers to use quantifiable test procedures, the need was recognized to develop a common language that customers could use to select the right flashlight for their specific needs. As a result, the American National Standards Institute (ANSI), with input from the


flashlight industry, developed performance standards and symbols to effectively communicate a flashlight's features and benefits.

The resulting ANSI/NEMA FL 1 Standards include the following six criteria:

### STANDARDS AND RATINGS (APPLICABLE TO FLASHLIGHTS ONLY)

#### LIGHT OUTPUT

Light Output is the total luminous flux. It is the total quantity of emitted overall light energy as measured by integrating the entire angular output of the portable light source. Light output in this standard is expressed in units of lumens.

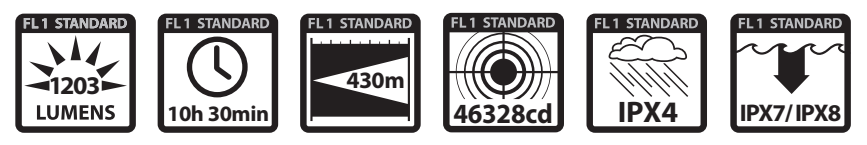

#### RUN TIME

Run Time is defined as the duration of time from the initial light output value – defined as 30 seconds after the point the device is first turned on – using fresh batteries, until the light output reaches 10% of the initial value.

#### BEAM DISTANCE

Beam Distance is defined as the distance from the device at which the light beam is 0.25 lux (0.25 lux is approximately the equivalent of the light emitted from the full moon "on a clear night in an open field").

#### WATER RESISTANT

Water Resistant // IPX4 - Water splashed against the device from any direction shall have no harmful effects.

#### WATERPROOF/SUBMERSIBLE

Waterproof // IPX7 – Ingress of water in quantities causing harmful effects shall not be possible when the enclosure is temporarily immersed in water under standardized conditions of pressure and time. Submersible // IPX8 – Ingress of water in quantities causing harmful effects shall not be possible when the enclosure is continuously immersed in water under conditions which shall be stated by manufacturer, but which are more severe than for IPX7.

#### PEAK BEAM INTENSITY

Peak Beam Intensity is the maximum luminous intensity typically along the central axis of a cone of light. The value is reported in candela and does not change with distance.

### GLOSSARY OF TERMS

**Candela** A unit of measurement of the intensity of light that is emitted by a light source in a particular direction.

**Lux** The unit of luminous flux in the International System, equal to the amount of light given out through a solid angle by a source of one candela intensity radiating equally in all directions.


**Lumen** A unit of measurement of the amount of brightness that comes from a light source. Lumens define "luminous flux," which is energy within the range of frequencies we perceive as light.

**Integrating Sphere** An integrating sphere is a measurement device with an entrance port that can accept all the directional light output of the device under test, or can totally enclose the device itself. The walls of the sphere should be highly diffused with high reflectivity (>80%) and the spectroradiometer should be shielded from direct view of the device under test by a baffle system.

**Rechargeable** Denotes a flashlight which contains rechargeable batteries and charging station. These models are shown with the rechargeable icon.



**IP (Ingress Protection)** – These ratings specify the environmental protection the enclosure provides. The IP rating normally has two numbers (IPXX). The first number represents protection from solid objects or materials (dust) whereas the second number represents protection from liquids (water). With the IP rating IP 54, 5 describes the level of protection from solid objects and 4 describes the level of protection from liquids as described by the IP Rating System (Solids vary from 0-6 IP rating, Liquids vary from 0-8 IP rating).

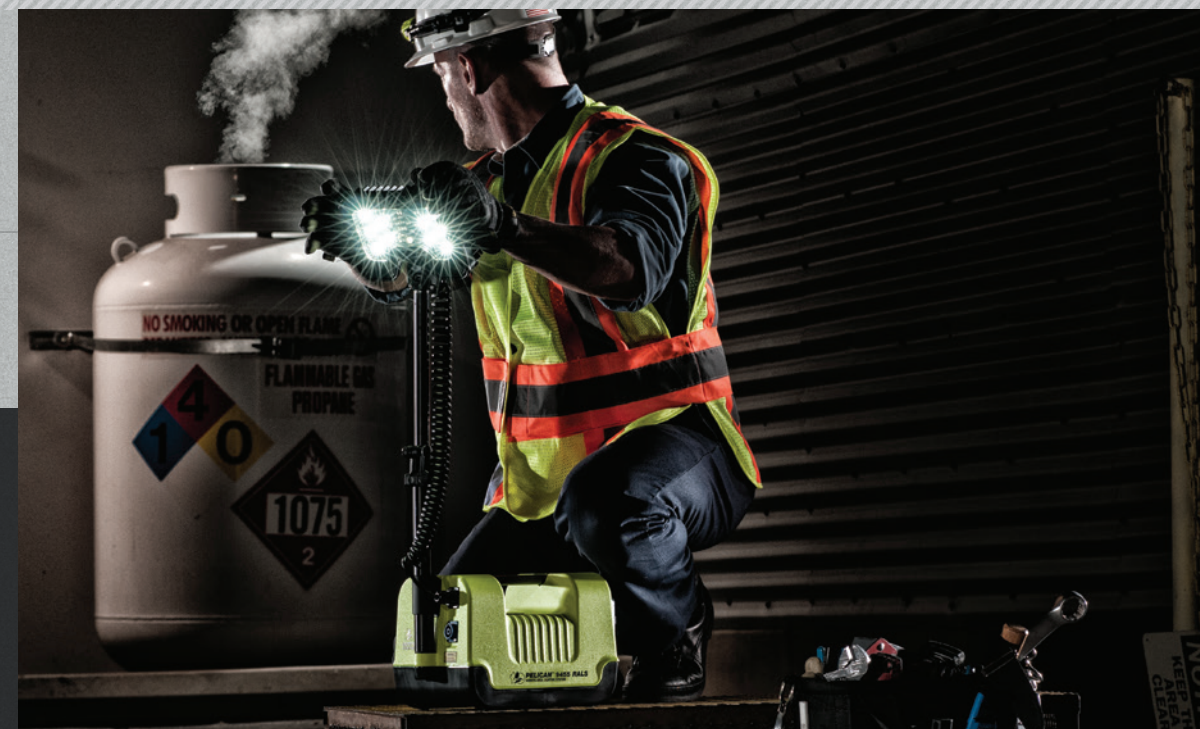

## INTRINSICALLY SAFE. YOUR PASSPORT THROUGH HAZARDOUS LOCATIONS




Whether working in a Class I Oil Refinery or in the silo of a Class III Textile Mill, safety is always a concern and your lighting tool shouldn't add to your worries. Pelican builds lighting tools certified for hazardous work environments. In fact we make more safety approved lights certified for Class I II III Div. 1 and groups ABCDEFG than anyone else.

#### HAZARDOUS AREA ELECTRICAL GUIDELINES

CLASSIFICATIONS	SUBSTANCE	TYPICAL ENVIRONMENTS
CLASS I DIVISION 1 DIVISION 2	Flammable Gases, Vapors, or Liquids	Oil Refinery, Paint Warehouse Spray Booth, Offshore Oil Rig
CLASS II DIVISION 1 DIVISION 2	Combustible Dusts	Coal Mine, Munitions Factory, Grain Silo, Hay Storage Facility
CLASS III DIVISION 1 DIVISION 2	Ignitable Fibers & Flyings	Paper Mill, Woodworking Facility, Textile Mill, Cotton Gin

**Division 1 (hazard likely):** Where volatile substances can exist all of the time or some of the time under normal operating conditions.  
**Division 2 (hazard not likely):** Where volatile substances are not likely to exist under normal operating conditions.

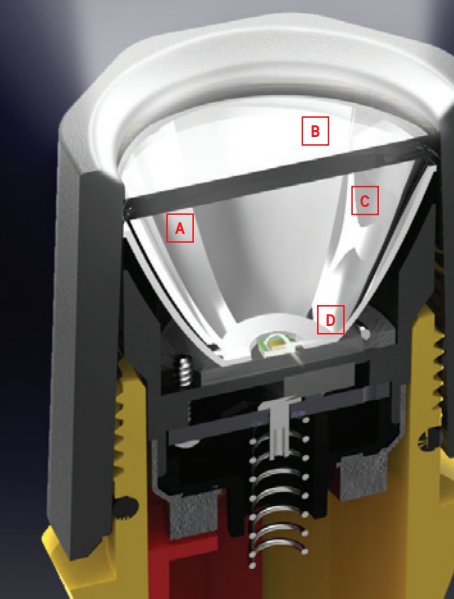

### NEW DEEP MOUNT LED TECHNOLOGY

Our engineering team has designed a new high performance LED lamp module (Deep Mount LED Module). These lights are now brighter, with close to 100% increase in lumens and a 2.5 times increase in lux value over previous versions (as well as offering a more robust design).

- A New deep dish reflector provides up to 2.5 times lux increase, and 100% lumen increase
- B Robust, over-molded polycarbonate lens won't yellow
- C Opti-mechanical design gathers and focuses 100% of the light
- D LED is mounted directly to the PCB board, creating a strong and efficient design solution





ALL LIGHTS ON THIS PAGE ARE



SAFETY CERTIFIED | LIGHTS

# SAFETY CERTIFIED LIGHTS

When hazardous areas are present, you can count on Pelican's line of safety certified lighting tools. From hand-held lights to headlamps to right angle lights, there is a safety certified light that has the features you need. Features include multiple light modes, photoluminescent bodies, dual beams, integrated battery level indicators and more. With a Pelican™ light, you can feel safe illuminating hazardous environments without being a source of ignition.

## L4™ 1830

LIGHT SOURCE // LED  
 BATTERIES // 3 AAAA Alkaline (included)  
 LENGTH // 6.2" (15.7cm)  
 CERTIFICATIONS // CI, D1



**5** LUMENS   **32h** RUN TIME

## L1™ 1930

LIGHT SOURCE // LED  
 BATTERIES // 4 LR 44 Alkaline (included)  
 LENGTH // 2.64" (6.7cm)  
 CERTIFICATIONS // CI, D1/CI II, D2, IECEx ia



**12** LUMENS   **4h 15m** RUN TIME

## MITYLITE™ 1965

LIGHT SOURCE // LED  
 BATTERIES // 2 AAA Alkaline (included)  
 LENGTH // 5.48" (13.9cm)  
 CERTIFICATIONS // CI II III, D1



**87** LUMENS   **2h 30m** RUN TIME

## 1975

NEW

LIGHT SOURCE // LED  
 BATTERIES // 2 AAA Alkaline (included)  
 LENGTH // 5.75" (14.6cm)  
 CERTIFICATIONS // CI II III, D1



**117** LUMENS   **2h 15m** RUN TIME

## 1975i

NEW

LIGHT SOURCE // LED  
 BATTERIES // 2 AAA Alkaline (included)  
 LENGTH // 5.75" (14.6cm)  
 CERTIFICATIONS // IECEx ia



**117** LUMENS   **2h 15m** RUN TIME

## SABRELITE™ 2010

LIGHT SOURCE // LED  
 BATTERIES // 3 C Alkaline (not included)  
 LENGTH // 8.11" (20.6cm)  
 CERTIFICATIONS // CI II III, D1



**161** LUMENS   **22h** RUN TIME

## SABRELITE™ 2010PL PHOTOLUMINESCENT SHROUD

LIGHT SOURCE // LED  
 BATTERIES // 3 C Alkaline (not included)  
 LENGTH // 8.11" (20.6cm)  
 CERTIFICATIONS // CI II III, D1



**161** LUMENS   **22h** RUN TIME

## VB3™ 2220

LIGHT SOURCE // LED  
 BATTERIES // 2 CR2032 Lithium (included)  
 LENGTH // 3.5" (8.9cm)  
 CERTIFICATIONS // CI, D1



**9** LUMENS   **34h** RUN TIME

## 2315

NEW

LIGHT SOURCE // LED  
 BATTERIES // 2 AA Alkaline (included)  
 LENGTH // 6.22" (15.8cm)  
 MODES // High / Low  
 CERTIFICATIONS // CI II III, D1, IECEx ia



**115** LUMENS   **6h** RUN TIME



**STEATHLITE™ 2410**

LIGHT SOURCE //  
LED  
BATTERIES //  
4 AA Alkaline (included)  
LENGTH //  
7" (17.8cm)  
CERTIFICATIONS //  
CI II III, D1, IECEx ia



**183** **5h 45m**  
LUMENS RUN TIME

**STEATHLITE™ 2410PL**  
PHOTOLUMINESCENT SHROUD

LIGHT SOURCE //  
LED  
BATTERIES //  
4 AA Alkaline (included)  
LENGTH //  
7" (17.8cm)  
CERTIFICATIONS //  
CI, II, III D1, IECEx ia



**183** **5h 45m**  
LUMENS RUN TIME

**STEATHLITE™ 2460**

LIGHT SOURCE //  
LED  
BATTERIES //  
NiMH (included)  
LENGTH //  
7" (17.8cm)  
CERTIFICATIONS //  
CI II, D2



**183** **5h**  
LUMENS RUN TIME

**3315**

LIGHT SOURCE //  
LED  
BATTERIES //  
3 AA Alkaline (included)  
LENGTH //  
6.14" (11.8cm)  
CERTIFICATIONS //  
CI II III, D1



**160** **19h**  
LUMENS RUN TIME

**3315PL**

LIGHT SOURCE //  
LED  
BATTERIES //  
3 AA Alkaline (included)  
LENGTH //  
6.14" (11.8cm)  
CERTIFICATIONS //  
CI II III, D1



**160** **19h**  
LUMENS RUN TIME

(Photoluminescent)

**3325**

LIGHT SOURCE //  
LED  
BATTERIES //  
3 AA Alkaline (included)  
LENGTH //  
6.06" (15.4cm)  
CERTIFICATIONS //  
CI II III, D1, IECEx ia



**171** **16h**  
LUMENS RUN TIME

**3345**

LIGHT SOURCE //  
LED  
BATTERIES //  
3 AA Alkaline (not included)  
LENGTH //  
7.25" (18.4cm)  
CERTIFICATIONS //  
CI II III, D1, IECEx ia



**280** **14h**  
LUMENS RUN TIME

UP TO

**9415 LANTERN**

LIGHT SOURCE //  
LED  
BATTERIES //  
NiMH (included)  
LENGTH //  
8.75" (22.2cm)  
MODES //  
High / Low / Flashing  
Full Time Battery Indicator  
CERTIFICATIONS //  
CI, D1



**588** **11h 30m**  
LUMENS RUN TIME

UP TO

**9415i LANTERN**

LIGHT SOURCE //  
LED  
BATTERIES //  
NiMH (included)  
LENGTH //  
8.75" (22.2cm)  
MODES //  
High / Low / Flashing  
Full Time Battery Indicator  
CERTIFICATIONS //  
IECEx ia, ATEX Zone 0



**392** **11h**  
LUMENS RUN TIME

UP TO







# SAFETY CERTIFIED RIGHT ANGLE & ARTICULATING LIGHTS

Firefighters put everything on the line and having the correct lighting tool is critical to their safety. Right angle (90°) and articulating flashlights, often worn on turnout coats, offer hands-free performance when it's needed the most. With extreme peak beam intensity and smoke-cutting penetration, these lights will get you in and out of tough situations safely.

ALL LIGHTS ON  
THIS PAGE ARE



SAFETY CERTIFIED | RIGHT ANGLE & ARTICULATING LIGHTS

## 3415 / 3415M

LIGHT SOURCE // LED  
BATTERIES // 3 AA (not included)  
LENGTH // 7.44" (18.9cm)  
MODES // High  
Spot / Flood / Both  
CERTIFICATIONS // CI II III, D1, IECEx ia



3415M Includes  
Magnetic Clip



**336** LUMENS **15h** RUN TIME

## LITTLE ED™ 3610

LIGHT SOURCE // LED  
BATTERIES // 4 AA Alkaline (included)  
LENGTH // 7.51" (19.1cm)  
CERTIFICATIONS // CI II III, D1



**183** LUMENS **5h 45m** RUN TIME

## LITTLE ED™ 3610PL PHOTOLUMINESCENT SHROUD

LIGHT SOURCE // LED  
BATTERIES // 4 AA Alkaline (included)  
LENGTH // 7.51" (19.1cm)  
CERTIFICATIONS // CI II III, D1



**183** LUMENS **5h 45m** RUN TIME

## 3715

LIGHT SOURCE // LED  
BATTERIES // 4 AA Alkaline (not included)  
LENGTH // 5.36" (13.6cm)  
MODES // High / Low / Flashing / Downcast  
CERTIFICATIONS // CI, D1



**233** LUMENS **31h** RUN TIME

## 3715PL PHOTOLUMINESCENT SHROUD

LIGHT SOURCE // LED  
BATTERIES // 4 AA Alkaline (not included)  
LENGTH // 5.36" (13.6cm)  
MODES // High / Low / Flashing / Downcast  
CERTIFICATIONS // CI, D1



**233** LUMENS **31h** RUN TIME

## 3765

LIGHT SOURCE // LED  
BATTERIES // NiMH (included)  
LENGTH // 5.36" (13.6cm)  
MODES // High / Low / Flashing / Downcast  
CERTIFICATIONS // CI, D1



**237** LUMENS **14h** RUN TIME



## 3765PL PHOTOLUMINESCENT SHROUD

LIGHT SOURCE // LED  
BATTERIES // NiMH (included)  
LENGTH // 5.36" (13.6cm)  
MODES // High / Low / Flashing / Downcast  
CERTIFICATIONS // CI, D1



**237** LUMENS **14h** RUN TIME





ALL LIGHTS ON  
THIS PAGE ARE



SAFETY CERTIFIED | HEADLAMPS

# SAFETY CERTIFIED HEADLAMPS

With up to 215 lumens, multiple light modes and revolutionary downcast lighting, Pelican™ safety certified headlamps will give you the confidence to stare danger right in the face. And with the ability to easily mount your headlamp to any helmet, you will never have any issues lighting up the workspace.

## HEADSUP LITE™ 2610

LIGHT SOURCE // LED  
 BATTERIES // 3 AAA Alkaline (included)  
 LENGTH // 1.49" (3.8cm)  
 MODES // High / Low  
 CERTIFICATIONS // CI, D1, IECEx ia



**30** LUMENS   **47h** RUN TIME   UP TO

## HEADSUP LITE™ 2690

LIGHT SOURCE // LED  
 BATTERIES // 3 AAA Alkaline (included)  
 LENGTH // 2.81" (7.1 cm)  
 CERTIFICATIONS // CI II III, D1, IECEx ia



**74** LUMENS   **11h** RUN TIME   UP TO

## 2745 HEADLAMP

LIGHT SOURCE // LED  
 BATTERIES // 3 AAA Alkaline (included)  
 LENGTH // 2.25" (5.7 cm)  
 MODES // High / Low / Flashing  
 CERTIFICATIONS // CI, D1, IECEx ia



**33** LUMENS   **40h** RUN TIME   UP TO

## 2755 HEADLAMP

LIGHT SOURCE // LED  
 BATTERIES // 3 AAA Alkaline (included)  
 LENGTH // 2.25" (5.7 cm)  
 MODES // High / Low / Flashing / Low Battery Warning  
 CERTIFICATIONS // CI, D1, IECEx ia



**118** LUMENS   **16h** RUN TIME   UP TO

## 2765 HEADLAMP

LIGHT SOURCE // LED  
 BATTERIES // 3 AAA Alkaline (included)  
 LENGTH // 2.25" (5.7 cm)  
 MODES // High / Low / Flashing / Downcast  
 CERTIFICATIONS // CI, D1, IECEx ia



**155** LUMENS   **14h** RUN TIME   UP TO

## 2785 HEADLAMP

LIGHT SOURCE // LED  
 BATTERIES // 4 AA Alkaline (included)  
 LENGTH // 3.00" (7.6 cm)  
 MODES // High / Medium / Low / Flashing / Downcast  
 CERTIFICATIONS // CI D1



**215** LUMENS   **98h** RUN TIME   UP TO



# HIGH PERFORMANCE LIGHTS

Whether power is a must or just a convenience, choose from Pelican's range of powerful lights. From small lights to large lights, handheld or mountable, you'll be able to find the perfect model for your next job.

## 1810

LIGHT SOURCE // LED  
 BATTERIES // 4 LR 41 Alkaline (included)  
 LENGTH // 1.50" (3.8 cm)



**16** LUMENS **8h 30m** RUN TIME

## 1910

LIGHT SOURCE // LED  
 BATTERIES // 1 AAA Alkaline (included)  
 LENGTH // 3.8" (9.7cm)  
 MODES // High / Low



**106** LUMENS **4h** RUN TIME UP TO

## 1920

LIGHT SOURCE // LED  
 BATTERIES // 2 AAA Alkaline (included)  
 LENGTH // 5.5" (14.0cm)  
 MODES // High / Low



**224** LUMENS **8h 45m** RUN TIME UP TO

## 1970

NEW

LIGHT SOURCE // LED  
 BATTERIES // 2 AAA Alkaline (included)  
 LENGTH // 5.75" (14.6cm)  
 MODES // High



**139** LUMENS **4h 15m** RUN TIME

## 2310

NEW

LIGHT SOURCE // LED  
 BATTERIES // 2 AA Alkaline (included)  
 LENGTH // 6.22" (15.8cm)  
 MODES // High / Low



**350** LUMENS **27h** RUN TIME UP TO

## 3310PL PHOTOLUMINESCENT

LIGHT SOURCE // LED  
 BATTERIES // 3 AA Alkaline (included)  
 LENGTH // 6.14" (15.6cm)  
 MODES // High / Low / Flashing (flashlight body glows in the dark)  
 (Photoluminescent)



**378** LUMENS **202h** RUN TIME UP TO

## 3310ELS (EMERGENCY LIGHTING SYSTEM)

LIGHT SOURCE // LED  
 BATTERIES // 3 AA Alkaline (included)  
 LENGTH // 6.14" (15.6cm)  
 INCLUDES // 3310PL and Wall Mountable Case (flashlight body glows in the dark)  
 (Photoluminescent)



**378** LUMENS **202h** RUN TIME UP TO

## 3410 / 3410M

LIGHT SOURCE // LED  
 BATTERIES // 3 AA (not included)  
 LENGTH // 7.44" (18.9cm)  
 MODES // High / Medium / Low Spot / Flood / Both  
 (Photoluminescent)



3410M Includes Magnetic Clip

**635** LUMENS **61h** RUN TIME UP TO

## 9410L LED LANTERN



LIGHT SOURCE // LED  
 BATTERIES // Lithium-Ion (included)  
 LENGTH // 8.75" (22.2 cm)  
 MODES // High / Low / Flashing Full Time Battery Indicator



**2207** LUMENS **11h** RUN TIME UP TO





# HIGH PERFORMANCE TACTICAL LIGHTS

Pelican's tactical lights are field ready, built to withstand the hard knocks that come with the job. Each intense, focused beam provides downrange visibility and peripheral lighting aids in situational awareness.

## 2350

LIGHT SOURCE // LED  
 BATTERIES // 1 AA Alkaline (included)  
 LENGTH // 4.23" (10.7 cm)  
 MODES // High/ Strobe / Low



**178** **21h**  
 LUMENS RUN TIME UP TO

## 7000

LIGHT SOURCE // LED  
 BATTERIES // 2 CR123 Lithium-Ion  
 LENGTH // 5.31" (13.5 cm)  
 MODES // High / Strobe / Medium / Low  
 Self Programmable



**774** **13h**  
 LUMENS RUN TIME UP TO

## 7600

LIGHT SOURCE // LED  
 BATTERIES // Lithium-Ion (included)  
 LENGTH // 6.19" (15.7cm)  
 MODES // High / Strobe / Medium / Low  
 LED COLORS // White / Red / Green  
 PROGRAMMABLE // 5 Selectable Programs



**994** **29h**  
 LUMENS RUN TIME UP TO



## 2360

LIGHT SOURCE // LED  
 BATTERIES // 2 AA Alkaline (included)  
 LENGTH // 6.2" (15.7cm)  
 MODES // High/ Strobe/ Low



**375** **13h**  
 LUMENS RUN TIME UP TO

## 7060

LIGHT SOURCE // LED  
 BATTERIES // Lithium-Ion (included)  
 LENGTH // 8.65" (22cm)  
 MODES // High / Strobe / Medium / Low  
 Self Programmable



**535** **68h**  
 LUMENS RUN TIME UP TO



## 2370

LIGHT SOURCE // LED  
 BATTERIES // 2 AA Alkaline (included)  
 LENGTH // 6.43" (16.3cm)  
 MODES // High / Low / Red / Blue  
 LIGHT COLORS // White / Red / Blue



**358** **11h**  
 LUMENS RUN TIME

## 7100

LIGHT SOURCE // LED  
 BATTERIES // Lithium-Ion (included)  
 LENGTH // 5.12" (13cm)  
 MODES // High / Strobe / Medium / Low  
 PROGRAMMABLE // 5 Selectable Programs



**695** **9h 15m**  
 LUMENS RUN TIME UP TO

## 7110

LIGHT SOURCE // LED  
 BATTERIES // 1 AA (included) or 1 CR123  
 LENGTH // 4.63" (11.8cm)  
 MODES // High / Strobe / Medium / Low  
 PROGRAMMABLE // 5 Selectable Programs



**445** **13h**  
 LUMENS RUN TIME UP TO

## 7610

LIGHT SOURCE // LED  
 BATTERIES // 1 AA (included) or 2 CR123  
 LENGTH // 5.44" (13.8cm)  
 MODES // High / Strobe / Medium / Low  
 PROGRAMMABLE // 5 Selectable Programs



**1018** **33h**  
 LUMENS RUN TIME UP TO

## 7620

LIGHT SOURCE // LED  
 BATTERIES // 2 AA (included), 2 CR123 or 3 CR123  
 LENGTH // 6.75" (17.15cm)  
 MODES // High / Strobe / Medium / Low  
 PROGRAMMABLE // 5 Selectable Programs



**1124** **37h**  
 LUMENS RUN TIME UP TO

## 8060

LIGHT SOURCE // LED  
 BATTERIES // NiMH (included)  
 LENGTH // 12.67" (32.2cm)  
 MODES // High / Strobe / Medium / Low  
 Flashing / Self Programmable



**1072** **60h**  
 LUMENS RUN TIME UP TO



2720 HEADLAMP

LIGHT SOURCE // LED  
 BATTERIES // 3 AAA Alkaline (included)  
 LENGTH // 2.48" (6.3 cm)  
 MODES // Variable Light Output / Spot to Flood / Red Night Vision Friendly LEDs



200 LUMENS 103h RUN TIME UP TO



2740 HEADLAMP

LIGHT SOURCE // LED  
 BATTERIES // 3 AAA Alkaline (included)  
 LENGTH // 2.25" (5.7 cm)  
 MODES // High / Low / Flashing / Red LED



66 LUMENS 21h RUN TIME UP TO

2750 HEADLAMP

LIGHT SOURCE // LED  
 BATTERIES // 3 AAA Alkaline (included)  
 LENGTH // 2.25" (5.7 cm)  
 MODES // High / Low / Flashing / Red LED / Low Battery Warning  
 (PhotoLuminescent)



259 LUMENS 11h RUN TIME UP TO

2760 HEADLAMP

LIGHT SOURCE // LED  
 BATTERIES // 3 AAA Alkaline (included)  
 LENGTH // 2.25" (5.7 cm)  
 MODES // High / Medium / Low / Downcast / Flashing / Red LED / Full-time Battery Level Indicator



289 LUMENS 11h RUN TIME UP TO

2780 HEADLAMP

LIGHT SOURCE // LED  
 BATTERIES // 4 AA Alkaline (included)  
 LENGTH // 3.00" (7.6 cm)  
 MODES // High / Medium / Low / Flashing / Downcast / Full-time Battery Level Indicator  
 (PhotoLuminescent)  
 3 Interchangeable Covers Included



430 LUMENS 12h RUN TIME UP TO

2780R HEADLAMP



LIGHT SOURCE // LED  
 BATTERIES // Lithium-Ion (included)  
 LENGTH // 3.00" (7.6 cm)  
 MODES // High / Medium / Low / Flashing / Downcast / Full-time Battery Level Indicator  
 (PhotoLuminescent)  
 3 Interchangeable Covers Included



558 LUMENS 7h 30m RUN TIME UP TO



# HIGH PERFORMANCE HEADLAMPS

With up to 500 lumens, revolutionary downcast lighting, USB charging and battery level indication, these headlamps are packed with features. Other options, including night vision friendly red illumination, interchangeable body colors and multiple settings, make these headlamps your best partner for the dark.





# PHOTOLUMINESCENT LIGHTS

When the power goes out, these flashlights glow the brightest. Pelican's photoluminescent models are made with "glow-in-the-dark" material to help you find your flashlight in an emergency.

## SABRELITE™ 2010PL PHOTOLUMINESCENT SHROUD

LIGHT SOURCE // LED  
BATTERIES // 3 C Alkaline (not included)  
LENGTH // 8.11" (20.6cm)  
CERTIFICATIONS // CI II III, D1



**PELICAN**  
SAFETY CERTIFIED

**161** LUMENS **22h** RUN TIME

## STEALTHLITE™ 2410PL PHOTOLUMINESCENT SHROUD

LIGHT SOURCE // LED  
BATTERIES // 4 AA Alkaline (included)  
LENGTH // 7" (17.8cm)  
CERTIFICATIONS // CI, II, III D1



**PELICAN**  
SAFETY CERTIFIED

**183** LUMENS **5h 45m** RUN TIME

## 2750 HEADLAMP

LIGHT SOURCE // LED  
BATTERIES // 3 AAA Alkaline (included)  
LENGTH // 2.25" (5.7 cm)  
MODES // High / Low / Flashing / Red LED / Low Battery Warning  
(PhotoLuminescent)



**259** LUMENS **11h** RUN TIME

## 2780 HEADLAMP

LIGHT SOURCE // LED  
BATTERIES // 4 AA Alkaline (included)  
LENGTH // 3.00" (7.6 cm)  
MODES // High / Medium / Low / Flashing / Downcast / Full-time Battery Level Indicator  
(PhotoLuminescent)



**PELICAN**  
SAFETY CERTIFIED

**430** LUMENS **12h** RUN TIME

## 2780R HEADLAMP

LIGHT SOURCE // LED  
BATTERIES // Lithium-Ion (included)  
LENGTH // 3.00" (7.6 cm)  
MODES // High / Medium / Low / Flashing / Downcast / Full-time Battery Level Indicator  
(PhotoLuminescent)



**PELICAN**  
SAFETY CERTIFIED

**558** LUMENS **7h 30m** RUN TIME

## 3310PL PHOTOLUMINESCENT

LIGHT SOURCE // LED  
BATTERIES // 3 AA Alkaline (included)  
LENGTH // 6.14" (15.6cm)  
MODES // High / Low / Flashing (flashlight body glows in the dark)  
(PhotoLuminescent)



**378** LUMENS **202h** RUN TIME

## 3310ELS (EMERGENCY LIGHTING SYSTEM)

LIGHT SOURCE // LED  
BATTERIES // 3 AA Alkaline (included)  
LENGTH // 6.14" (15.6cm)  
INCLUDES // 3310PL and Wall Mountable Case (flashlight body glows in the dark)  
(PhotoLuminescent)



**378** LUMENS **202h** RUN TIME

## 3315PL PHOTOLUMINESCENT

LIGHT SOURCE // LED  
BATTERIES // 3 AA Alkaline (included)  
LENGTH // 6.14" (11.8cm)  
CERTIFICATIONS // CI II III, D1  
(PhotoLuminescent)



**PELICAN**  
SAFETY CERTIFIED

**160** LUMENS **19h** RUN TIME

## 3325

LIGHT SOURCE // LED  
BATTERIES // 3 AA Alkaline (included)  
LENGTH // 6.06" (15.4cm)  
CERTIFICATIONS // CI, D1, IECEx ia



**PELICAN**  
SAFETY CERTIFIED

**171** LUMENS **16h** RUN TIME

## 3410 / 3410M

LIGHT SOURCE // LED  
BATTERIES // 3 AA (not included)  
LENGTH // 7.44" (18.9cm)  
MODES // High / Medium / Low Spot / Flood / Both  
(PhotoLuminescent)



**PELICAN**  
SAFETY CERTIFIED

**635** LUMENS **61h** RUN TIME

## LITTLE ED™ 3610PL PHOTOLUMINESCENT SHROUD

LIGHT SOURCE // LED  
BATTERIES // 4 AA Alkaline (included)  
LENGTH // 7.51" (19.1cm)  
CERTIFICATIONS // CI II III, D1



**PELICAN**  
SAFETY CERTIFIED

**183** LUMENS **5h 45m** RUN TIME

## 3715PL PHOTOLUMINESCENT SHROUD

LIGHT SOURCE // LED  
BATTERIES // 4 AA Alkaline (not included)  
LENGTH // 5.36" (13.6cm)  
MODES // High / Low / Flashing / Downcast  
CERTIFICATIONS // CI, D1



**PELICAN**  
SAFETY CERTIFIED

**233** LUMENS **31h** RUN TIME

## 3765PL PHOTOLUMINESCENT SHROUD

LIGHT SOURCE // LED  
BATTERIES // NiMH (included)  
LENGTH // 5.36" (13.6cm)  
MODES // High / Low / Flashing / Downcast  
CERTIFICATIONS // CI, D1




**PELICAN**  
SAFETY CERTIFIED

**237** LUMENS **14h** RUN TIME



# CORRECT COLOR™ LIGHTS

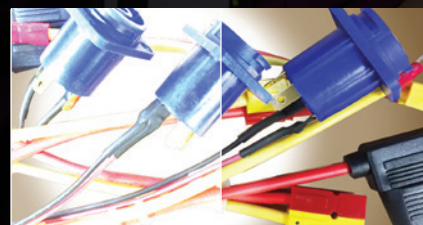


70 CRI  
CONVENTIONAL  
FLASHLIGHTS

90+ CRI  
CORRECT  
COLOR TECHNOLOGY

When you can't see the difference between one color cable and another, the job may be compromised. Now you can trust our select flashlights with new Correct Color™ technology to work in confidence.

## 2750CC HEADLAMP

LIGHT SOURCE //  
LED  
BATTERIES //  
3 AAA Alkaline (included)  
LENGTH //  
2.25" (5.7cm)  
MODES //  
High / Low / Flashing  
 (PhotoLuminescent)




**183**  
LUMENS

**11h**  
RUN TIME

UP TO

## 3310CC

LIGHT SOURCE //  
LED  
BATTERIES //  
3 AA Alkaline (included)  
LENGTH //  
6.14" (15.6 cm)  
MODES //  
High / Low / Flashing  
 (PhotoLuminescent)




**238**  
LUMENS

**175h**  
RUN TIME

UP TO

## 3410MCC

LIGHT SOURCE //  
LED  
BATTERIES //  
3 AA Alkaline (not included)  
LENGTH //  
7.44" (18.9 cm)  
MODES //  
High / Medium / Low / Flashing  
Spot / Flood / Both  
 (PhotoLuminescent)




3410MCC Includes  
Magnetic Clip

**484**  
LUMENS

**67h**  
RUN TIME

UP TO

## 2755CC HEADLAMP

LIGHT SOURCE //  
LED  
BATTERIES //  
3 AAA Alkaline (included)  
LENGTH //  
2.25" (5.7 cm)  
MODES //  
High / Low / Flashing  
CERTIFICATIONS //  
CI, D1, IECEx ia  





**PELICAN**  
SAFETY CERTIFIED

**72**  
LUMENS

**15h**  
RUN TIME

UP TO

## 3315CC

LIGHT SOURCE //  
LED  
BATTERIES //  
3 AA Alkaline (included)  
LENGTH //  
6.14" (15.6 cm)  
MODES //  
On / Off  
CERTIFICATIONS //  
CI II II, D1, IECEx ia  





**PELICAN**  
SAFETY CERTIFIED

**130**  
LUMENS

**16h 30m**  
RUN TIME

UP TO

## 3415MCC

LIGHT SOURCE //  
LED  
BATTERIES //  
3 AA Alkaline (not included)  
LENGTH //  
7.44" (18.9 cm)  
MODES //  
High / Flashing  
Spot / Flood / Both  
CERTIFICATIONS //  
CI II II, D1, IECEx ia  




3415MCC Includes  
Magnetic Clip

**PELICAN**  
SAFETY CERTIFIED

**258**  
LUMENS


**13h**  
RUN TIME

UP TO



# 5 SERIES LIGHTS

Our 5 Series flashlights feature slide beam technology: The flood position projects a wide beam to illuminate your work area or use the spot beam for a long distance focused beam.

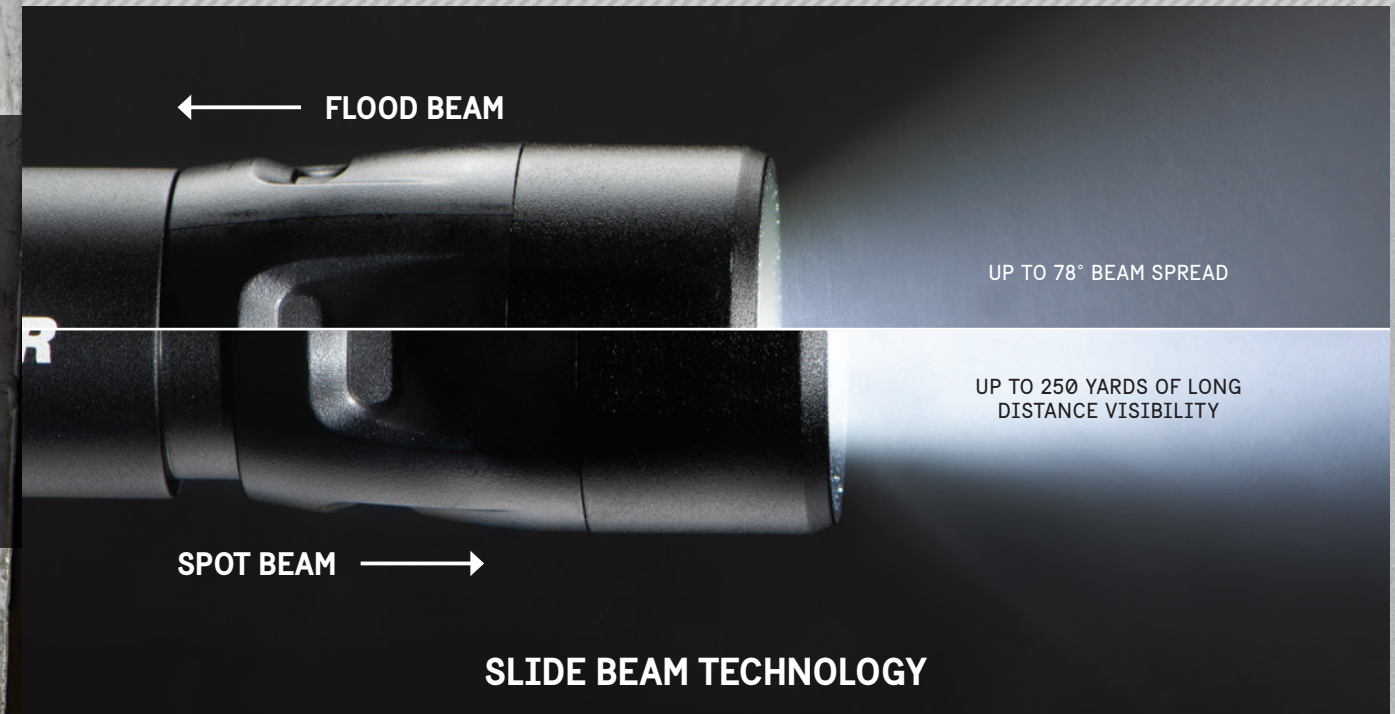

## 5000

LIGHT SOURCE // LED  
 BATTERIES // 2 AAA Alkaline (included)  
 LENGTH // 5.59" (14.2 cm)  
 MODES // High / Low / Flashing



**202** LUMENS    **7h** RUN TIME    UP TO

## 5010

LIGHT SOURCE // LED  
 BATTERIES // 2 AA Alkaline (included)  
 LENGTH // 6.26" (15.9 cm)  
 MODES // High / Low / Flashing



**392** LUMENS    **26h** RUN TIME    UP TO

## 5020

LIGHT SOURCE // LED  
 BATTERIES // 4 AAA Alkaline (included)  
 LENGTH // 5.87" (14.9 cm)  
 MODES // High / Medium / Low / Flashing




**586** LUMENS    **27h** RUN TIME    UP TO

## 5050R

LIGHT SOURCE // LED  
 BATTERIES // Lithium-Ion (included)  
 LENGTH // 6.16" (15.6 cm)  
 MODES // Boost / High / Low / Flashing



**883** LUMENS    **40h** RUN TIME    UP TO





# SPECIALTY LIGHTS

Whether directing fighter jets on the deck of aircraft carrier or protecting our troops with friend-or-foe infrared beacons, Pelican manufactures quality lighting tools for many unique military applications. Also available: magnetically secured flexible neck designs for mechanics and red LED flashers that are helpful in keeping workers safe.



## MINI FLASHER™ 2130

LIGHT SOURCE // LED  
 BATTERIES // 2 L1154 Alkaline (included)  
 LENGTH // 1.73" (4.4 cm)



## MINI FLASHER™ 2130IR

LIGHT SOURCE // LED (infrared)  
 BATTERIES // 2 L1154 Alkaline (included)  
 LENGTH // 1.73" (4.4 cm)



## 2490 (WITH TRAFFIC WAND)

LIGHT SOURCE // Recoil™ LED  
 BATTERIES // 4 AA Alkaline (not included)  
 LENGTH // 12.5" (31.7 cm)



**64** LUMENS  
**12h** RUN TIME

## 2365 FLEX NECK

LIGHT SOURCE // LED  
 BATTERIES // 2 AA Alkaline (not included)  
 LENGTH // 21.92" (55.7cm)



**65** LUMENS  
**7h** RUN TIME





# RAALS

## REMOTE AREA LIGHTING SYSTEMS

Providing increased performance, safer working conditions, emergency preparedness and greater flexibility, Pelican's RAALS line is the modern alternative to generator based lighting:

- Silent performance
- No exhaust fumes
- No flammable fuel
- Remote activation
- Eliminated trip hazards
- Little to no heat

### 9430 RALS

LIGHT SOURCE // LED  
 BATTERIES // Sealed Lead Acid  
 DIMENSIONS // 15.75" (40 cm) Closed, 32.28" (82 cm) Extended  
 MODES // High / Low  
 BEAM SPREAD // 125°, 6 LEDs



**1600** LUMENS  
**15h** RUN TIME  
 UP TO



### 9430SL SPOT LIGHT RALS

LIGHT SOURCE // LED  
 BATTERIES // Sealed Lead Acid  
 DIMENSIONS // 15.75" (40 cm) Closed, 32.28" (82 cm) Extended  
 MODES // High / Low  
 BEAM SPREAD // 10°, 24 LEDs




**2000** LUMENS  
**15h** RUN TIME  
 UP TO



### 9600 RALS

LIGHT SOURCE // LED  
 INPUT VOLTAGE // 110v - 240v  
 DIMENSIONS // Light Head - 18.31" x 8.27" x 4.72" (46.5 x 21 x 12 cm) Extended - 120" (304.8 cm) [with base & pole]  
 BEAM SPREAD // 125°, 14 LEDs

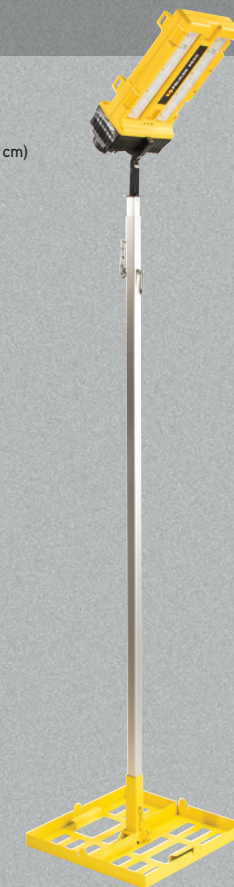

**3000** LUMENS  
 UP TO

\* Shown with base & pole accessories

### 9440 RALS

LIGHT SOURCE // LED  
 BATTERIES // Lithium-Ion  
 DIMENSIONS // 37.4" (95 cm) Closed, 85" (215.8 cm) Extended  
 MODES // High / Medium / Low  
 BEAM SPREAD // 120°, 10 LEDs



Bluetooth

**5300** LUMENS  
**8h** RUN TIME  
 UP TO



### 9455 SAFETY LIGHT RALS

LIGHT SOURCE // LED  
 BATTERIES // NiMH  
 DIMENSIONS // 15.35" (39 cm) Closed, 31.50" (80 cm) Extended  
 MODES // High / Low / Flashing  
 BEAM SPREAD // 125°, 10 LEDs  
 CERTIFICATIONS // CI, D1, IECEx ia, ATEX Zone 0




**1600** LUMENS  
**10h** RUN TIME  
 UP TO



### 9500 SHELTER LIGHTING SYSTEM

LIGHT SOURCE // LED  
 INPUT VOLTAGE // 110-240vac  
 DIMENSIONS // 20.62" (52.4 cm) Closed, 157.5" (399.9 cm) Extended  
 LIGHT OUTPUT // 6000 (White LED) Per Head, 1200 (Red LED) Per Head  
 BEAM SPREAD // 210° Diffused, 36 LEDs per head (24 White/12 Red), 3 lamp heads  
 PELICAN CASE // Included

Select between white light or red night vision mode

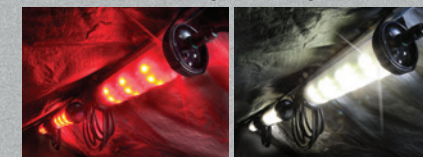

**6000** LUMENS  
 UP TO



Chain up to 34 Pelican™ 9600 LED Modular Light heads together.





9460/9460M RALS

LIGHT SOURCE // LED  
 BATTERIES // Sealed Lead Acid  
 DIMENSIONS // 23.25" (59.1 cm) Closed,  
 79.50" (201.9 cm) Deployed  
 MODES // Variable Light Output / Flashing / 3 Preset Levels  
 BEAM SPREAD // 120°, 10 LEDs per head, 2 lamp heads



INTELLIGENT CONTROL SYSTEM  
 calculates and displays current battery life,  
 allowing the user to regulate the intensity of  
 the light and choose the desired run time.

**12000** **24h**  
 LUMENS RUN TIME UP TO



9460

9460M



9460, 9460M, 9470, 9470M RALS FEATURES



12V POWER SUPPLY  
 WITH DUAL USB ADAPTER  
 12 volt power supply port  
 can be used to power any  
 electrical product that utilizes  
 a standard 12v vehicle style  
 connector (up to 4 amps) or a  
 variety of USB connections.



BLUETOOTH™ CONTROL  
 Bluetooth app controls multiple  
 units and variable light from  
 0-100% output. Free App for  
 iOS™ and Android™.



MULTI-TERRAIN TROLLEY  
 (ONLY ON 9460M, 9470M RALS)  
 Large 1.5 inch polyurethane  
 wheels allow for easier transport  
 across rough surfaces. Molded  
 feet level and stabilize case.

9470/9470M RALS

LIGHT SOURCE // LED  
 BATTERIES // Sealed Lead Acid  
 DIMENSIONS // 24.75" (62.9 cm) Closed,  
 80.00" (208.3 cm) Deployed  
 MODES // Variable Light Output / Flashing / 3 Preset Levels  
 BEAM SPREAD // 120°, 10 LEDs per head, 4 lamp heads



INTELLIGENT CONTROL SYSTEM  
 calculates and displays current battery life,  
 allowing the user to regulate the intensity of  
 the light and choose the desired run time.

**24000** **24h**  
 LUMENS RUN TIME UP TO



9470

9470M



9480 RALS

LIGHT SOURCE // LED  
 BATTERIES // Sealed Lead Acid  
 DIMENSIONS // 15.50" (39.4 cm) Closed,  
 23.75" (60.3 cm) Deployed  
 MODES // High / Medium / Low / Flashing  
 BEAM SPREAD // 125°, 8 LEDs

**4000** **28h**  
 LUMENS RUN TIME UP TO



SWAPPABLE  
 POWER PACK  
 Swappable power pack  
 w/12v aux. port adapter  
 powers smartphones,  
 laptops, etc.



BATTERY LEVEL  
 INDICATOR  
 Full time battery  
 level indication.

9490 RALS

LIGHT SOURCE // LED  
 BATTERIES // Sealed Lead Acid  
 DIMENSIONS // 20" (50.8 cm) Closed,  
 72" (182.9 cm) Deployed  
 MODES // High / Medium / Low / Flashing / (6000-Variable)  
 BEAM SPREAD // 125°, 10 LEDs



INTELLIGENT CONTROL SYSTEM  
 calculates and displays current battery life,  
 allowing the user to regulate the intensity of  
 the light and choose the desired run time.

**6000** **24h**  
 LUMENS RUN TIME UP TO



BLUETOOTH™ CONTROL  
 Bluetooth app controls  
 multiple units and  
 variable light from  
 0-100% output Free App  
 for iOS™ and Android™.





# HOLSTERS & WAND ACCESSORIES

						
<b>CAT. NO. (Description)</b>	<b>2407</b> Nylon Holster	<b>7077</b> Plain Leather Holster	<b>7078</b> Nylon Holster	<b>7106</b> Nylon Holster	<b>7108</b> Composite Holster	<b>7116</b> Nylon Holster
<b>COMPATIBLE LIGHTS</b>	2410 2410PL 2460	7060	7060	7100	7100 7110	7110

							
<b>CAT. NO. (Description)</b>	<b>7606</b> Nylon Holster	<b>7607</b> Nylon Holster / Wand Kit	<b>7608</b> Composite Holster	<b>7616</b> Nylon Holster	<b>7617</b> Nylon Holster / Wand Kit	<b>7627</b> Nylon Holster / Wand Kit	<b>8057</b> Nylon Holster
<b>COMPATIBLE LIGHTS</b>	7600	7600	7600 7610 7620	7610	7610	7620	8050





# SPECIFICATIONS

CAT NO.	BATTERIES (included unless noted)	WEIGHT W/ BATTERIES (KG)	LENGTH (CM)	ANSI LIGHT OUTPUT	ANSI RUN TIME	ANSI BEAM DISTANCE (meters)	ANSI PEAK BEAM INTENSITY (candela)	ANSI IPX RATING	CERTIFICATIONS	COLORS
1830	3 AAAA Alkaline	1.2 oz. (0.03)	6.2" (15.7)	5	32h	13	44	IPX4	CI, D1	■
1930	4 LR 44 Alkaline	0.9 oz. (0.03)	2.64" (6.7)	12	4h 15m	17	70	IPX4	CI, D1/CI II, D2 IECEx ia	■ ■
1965	2 AAA Alkaline	1.9 oz. (0.05)	5.48" (13.9)	87	2h 30m	41	429	IPX7	CI II III, D1	■ ■
1975	2 AAA Alkaline	1.9 oz. (0.05)	5.75" (14.6)	117	2h 15m	24	141	IP68	CI II III, D1	■
1975i	2 AAA Alkaline	1.9 oz. (0.05)	5.75" (14.6)	117	2h 15m	24	141	IP68	IECEx ia	■
2010	3 C Alkaline (not included)	13.4 oz. (0.38)	8.11" (20.6)	161	22h	160	6398	IPX7	CI II III, D1	■ ■
2010PL	3 C Alkaline (not included)	13.4 oz. (0.38)	8.11" (20.6)	161	22h	160	6398	IPX7	CI II III, D1	■
2220	2 CR2032 Lithium	1 oz. (0.03)	3.5" (8.9)	9	34h	12	38	IPX4	CI, D1	■
2315	2 AA Alkaline	4.6 oz. (0.13)	6.22" (15.8)	115	6h	75	1403	IPX8	CI II III, D1, IECEx ia	■
2410	4 AA Alkaline	7.3 oz. (0.21)	7" (17.8)	183	5h 45m	184	8480	IPX7	CI II III, D1 IECEx ia	■ ■
2410PL	4 AA Alkaline	7.3 oz. (0.21)	7" (17.8)	183	5h 45m	184	8480	IPX7	CI II III, D1 IECEx ia	■
2460	4 Rechargeable NiMH	7.8 oz. (0.22)	7" (17.8)	183	5h	179	8050	IPX7	CI II, D2	■
3315	3 AA Alkaline	6.2 oz. (0.18)	6.14" (15.6)	160	19h	144	5153	IP67	CI II III, D1 IECEx ia	■ ■
3315PL	3 AA Alkaline	6.2 oz. (0.18)	6.14" (15.6)	160	19h	144	5153	IP67	CI II III, D1 IECEx ia	■ (photoluminescent)
3325	3 AA Alkaline	6.1 oz. (0.17)	6.06" (15.4)	171	16h	136	4558	IPX7	CI II II, D1 IECEx ia	■
3345	3 AA Alkaline (not included)	7.5 oz. (0.21)	7.25" (18.4)	280 <sup>SF</sup> , 117 <sup>F</sup> , 219 <sup>S</sup>	7h <sup>SF</sup> , 14h <sup>F</sup> , 12h <sup>S</sup>	126 <sup>SF</sup> , 16 <sup>F</sup> , 137 <sup>S</sup>	3990 <sup>SF</sup> , 60 <sup>F</sup> , 4724 <sup>S</sup>	IPX7	CI II III, D1 IECEx ia	■
9415	4 Rechargeable NiMH	49.3 oz. (1.4)	8.75" (22.2)	588*, 224***	4h 30m*, 11h 30m***	288*, 176***	20792*, 7787***	IPX4	CI, D1	■
9415i	4 Rechargeable NiMH	58.2 oz. (1.65)	8.75" (22.2)	392*, 144***	4h 30m*, 11h***	392*, 234***	32767*, 13747***	IPX4	IECEx ia, ATEX Zone 0	■

\*High | \*\*\*Low | <sup>S</sup> Spot | <sup>F</sup> Flood | Additional approvals may apply. For details go to [www.pelican.com](http://www.pelican.com)

CAT NO.	BATTERIES (included unless noted)	WEIGHT W/ BATTERIES (KG)	LENGTH (CM)	ANSI LIGHT OUTPUT	ANSI RUN TIME	ANSI BEAM DISTANCE (meters)	ANSI PEAK BEAM INTENSITY (candela)	ANSI IPX RATING	CERTIFICATIONS	COLORS
3415 / 3415M	3 AA Alkaline (not included)	9.0 oz. (0.25)	7.44" (18.9)	336 <sup>SF</sup> , 177 <sup>F</sup> , 186 <sup>S</sup>	6h <sup>SF</sup> , 15h <sup>F</sup> , 14h <sup>S</sup>	133 <sup>SF</sup> , 37 <sup>F</sup> , 135 <sup>S</sup>	4418 <sup>SF</sup> , 336 <sup>F</sup> , 4544 <sup>S</sup>	IPX8	CI II III, D1, IECEx ia	■
3610	4 AA Alkaline	10.5 oz. (0.3)	7.51" (19.1)	183	5h 45m	184	8480	IPX7	CI II III, D1, IECEx ia	■
3610PL	4 AA Alkaline	10.5 oz. (0.3)	7.51" (19.1)	183	5h 45m	184	8480	IPX7	CI II III, D1, IECEx ia	■
3715	4 AA Alkaline (not included)	14.4 oz. (0.41)	5.36" (13.6)	233*, 113***, 31****	4h*, 7h***, 31h****	293*, 187***, 30****	21440*, 8775***, 220****	IPX4	CI, D1, IECEx ia	■
3715PL	4 AA Alkaline (not included)	14.4 oz. (0.41)	5.36" (13.6)	233*, 113***, 31****	4h*, 7h***, 31h****	293*, 187***, 30****	21440*, 8775***, 220****	IPX4	CI, D1, IECEx ia	■
3765	4 Rechargeable NiMH	14.6 oz. (0.41)	5.36" (13.6)	237*, 113***, 32****	3h*, 6h 30m***, 14h****	301*, 193***, 28****	22720*, 9354***, 192****	IPX4	CI, D1	■
3765PL	4 Rechargeable NiMH	14.6 oz. (0.41)	5.36" (13.6)	237*, 113***, 32****	3h*, 6h 30m***, 14h****	301*, 193***, 28****	22720*, 9354***, 192****	IPX4	CI, D1	■
2610	3 AAA Alkaline	3.2 oz. (0.09)	1.49" (3.8)	30*, 14***	19h*, 47h***	28*, 19***	194*, 91***	IPX4	CI, D1, IECEx ia	■
2690	3 AAA Alkaline	4.1 oz. (0.12)	2.81" (7.1)	74	11h	92	2124cd	IPX7	CI II III, D1, IECEx ia	■
2745	3 AAA Alkaline	3.3 oz. (0.09)	2.25" (5.7)	33*, 17***	20h*, 40h***	35*, 25***	309*, 155***	IP54	CI, D1, IECEx ia	■ ■
2755	3 AAA Alkaline	3.4 oz. (0.1)	2.25" (5.7)	118*, 60***	7h 30m*, 16**	60*, 43***	910*, 454***	IP54	CI, D1, IECEx ia	■ ■
2765	3 AAA Alkaline	3.4 oz. (0.1)	2.25" (5.7)	155*, 132**, 78***, 34****	6h 15m*, 5h 30m**, 8h***, 14h****	107*, 93**, 63***, 9****	2876*, 2163**, 978***, 18****	IP54	CI, D1, IECEx ia	■ ■
2785	4 AA Alkaline	8.8 oz. (0.25)	3" (7.6)	215*, 106**, 22***	5h*, 13h**, 98h***	108*, 76**, 34***	2911*, 1445**, 290***	IP54	CI, D1, IECEx ia	■ ■
1810	4 LR 41 Alkaline	0.5 oz. (0.01)	1.5" (3.8)	16	8h 45m	23	137	IPX4	N/A	■
1910	1 AAA Alkaline	1.5 oz. (0.04)	3.8" (9.6)	106*, 21***	2h 30m*, 4h***	55*, 24***	765*, 140***	IPX7	N/A	■
1920	2 AAA Alkaline	2.2 oz. (0.06)	5.5" (14)	224*, 22***	2h 15m*, 8h 45m***	81*, 25***	1640*, 152***	IPX7	N/A	■
1970	2 AAA Alkaline	1.8 oz. (0.05)	5.75" (14.6)	139	4h 15m	29	205	IPX4	N/A	■
2310	2 AA Alkaline	4.6 oz. (0.13)	6.22" (15.8)	350*, 25***	2h 15m*, 27h***	134*, 36***	4516*, 324***	IPX8	N/A	■
3310PL	3 AA Alkaline	6.2 oz. (0.18)	6.14" (15.6)	378*, 39***	8h*, 202h***	196*, 62***	9580*, 961***	IPX8	N/A	■ (photoluminescent)
3310ELS	3 AA Alkaline	6.2 oz. (0.18)	6.14" (15.6)	378*, 39***	8h*, 202h***	196*, 62***	9580*, 961***	IPX8	N/A	■ (photoluminescent)
3410 / 3410M	3 AA Alkaline (not included)	9.2 oz. (0.26)	7.44" (18.9)	653*, 97**, 25***	5h*, 19h*, 61h*	184*, 67**, 34***	8504*, 1129**, 292***	IPX8	N/A	■ (photoluminescent)
9410L	6 Rechargeable Lithium-Ion	44.7 oz. (1.27)	8.75" (22.2)	2207*, 463***	3h 15m*, 11h***	453*, 207***	51304*, 10710***	IPX4	N/A	■ ■

\*High | \*\*Medium | \*\*\*Low | \*\*\*\*Downcast | <sup>S</sup> Spot | <sup>F</sup> Flood | Additional approvals may apply. For details go to [www.pelican.com](http://www.pelican.com)



	CAT NO.	BATTERIES (included unless noted)	WEIGHT W/ BATTERIES (KG)	LENGTH (CM)	ANSI LIGHT OUTPUT	ANSI RUN TIME	ANSI BEAM DISTANCE (meters)	ANSI PEAK BEAM INTENSITY (candela)	ANSI IPX RATING	CERTIFICATIONS	COLORS
HIGH PERFORMANCE TACTICAL LIGHTS	2350	1 AA Alkaline	3.4 oz. (0.1)	4.23" (10.7)	178*, 15***	2h 15m*, 21h***	130*, 37***	4196*, 345***	IPX7	N/A	■
	2360	2 AA Alkaline	5.4 oz. (0.15)	6.2" (15.7)	375*, 29***	2h 30m*, 13h***	192*, 53***	9187*, 705***	IPX8	N/A	■
	2370	2 AA Alkaline	6.5 oz. (0.18)	6.43" (16.3)	358*, 35***	2h*, 11h***	190*, 57***	9000*, 823***	IPX7	N/A	■
	7000	2 CR123 Lithium	5.6 oz. (0.16)	5.31" (13.5)	774*, 457***, 99***	1h 15m*, 1h 45m**, 13h***	246*, 176**, 83***	14768*, 7712**, 1738***	IPX7	N/A	■
	7060	1 Rechargeable Lithium-Ion	10.4 oz. (0.29)	8.65" (22)	535*, 218**, 26***	3h 45m*, 12h**, 68h***	207*, 131**, 44***	10707*, 4297**, 481***	IPX4	N/A	■
	7100	1 Rechargeable Lithium-Ion	4.4 oz. (0.13)	5.12" (13)	695*, 348**, 33***	1h 15m*, 1h 30m**, 9h 15m***	194*, 130**, 38***	9413*, 4247**, 358***	IPX8	N/A	■
	7110	1 AA Alkaline (included) or 1 CR123 (not included)	4.1 oz. (0.12)	4.63" (11.8)	445*, 214**, 23***	1h*, 1h 30m**, 13h***	93*, 62**, 20***	6053*, 2695**, 288***	IPX8	N/A	■
	7600	1 Rechargeable Lithium-Ion	6.9 oz. (0.20)	6.19" (15.7)	944*, 479**, 37***	3h 15m*, 4h 30m**, 29h***	225*, 157**, 44***	12693*, 6172**, 480***	IPX8	N/A	■
	7610	1 AA Alkaline (included) or 2 CR123 (not included)	5.5 oz. (0.16)	5.44" (13.8)	1018*, 531**, 25***	1h 30m*, 2h**, 33h***	227*, 151**, 33***	12856*, 5674**, 273***	IPX8	N/A	■
	7620	2 AA Alkaline (included) or 3 CR123 (not included)	6.9 oz. (0.20)	6.75" (17.1)	1124*, 528**, 28***	2h*, 3h**, 37h***	243*, 155**, 35***	14824*, 5974**, 315***	IPX8	N/A	■
8060	4 Rechargeable NiMH	23.2 oz. (0.66)	12.67" (32.2)	1072*, 551**, 29***	3h 45m*, 4h 15m**, 60h***	376*, 265**, 60***	35300*, 17520**, 889***	IPX6	N/A	■	
HIGH PERFORMANCE HEADLAMPS	2720	3 AAA Alkaline	3.8 oz. (0.11)	2.48" (6.3)	200*, 12***	3h*, 103h***	82*, 20***	1684*, 103***	IPX4	N/A	■
	2740	3 AAA Alkaline	3.3 oz. (0.09)	2.25" (5.7)	66*, 36***	7h 15m*, 21h***	22*, 16***	122*, 68***	IPX4	N/A	■
	2750	3 AAA Alkaline	3.4 oz. (0.1)	2.25" (5.7)	259*, 71***	2h 30m*, 11h***	90*, 48***	2041*, 573***	IPX4	N/A	■ (photoluminescent)
	2760	3 AAA Alkaline	3.4 oz. (0.1)	2.25" (5.7)	289*, 156**, 97***, 42***	1h 30m*, 3h 15m**, 5h 30m***, 11h***	101*, 66**, 48***, 19***	2540*, 1097**, 567***, 88***	IPX4	N/A	■
	2780	4 AA Alkaline	8.8 oz. (0.25)	3" (7.6)	430*, 203**, 53***	1h 30m*, 3h**, 12h***	124*, 81**, 27***	3868*, 1625**, 425***	IPX7	N/A	■ (photoluminescent)
	2780R	1 Rechargeable Lithium-Ion	7.3 oz. (0.21)	3" (7.6)	558*, 213**, 95***	2h*, 3h**, 7h 30m***	127*, 78**, 53***	4060*, 1540**, 695***	IPX7	N/A	■ (photoluminescent)
	2750CC	3 AAA Alkaline	3.4 oz. (0.10)	2.25" (5.7)	183*, 50***	2h 30m*, 11h***	63*, 31***	989*, 240***	IPX4	N/A	■ (photoluminescent)
CORRECT COLOR LIGHTS	2755CC	3 AAA Alkaline	3.4 oz. (0.10)	2.25" (5.7)	72*, 36***	6h 45m*, 15h***	50*, 35***	632*, 302***	IP54	CI D1, IECEx ia	■
	3310CC	3 AA Alkaline	6.2 oz. (0.18)	6.14" (15.6)	283*, 31***	8h*, 175h***	169*, 50***	7150*, 625***	IPX8	N/A	■ (photoluminescent)
	3315CC	3 AA Alkaline	6.2 oz. (0.18)	6.14" (15.6)	130	16h 30m	110	3042	IP67	CI II III, D1, IECEx ia	■
	3410MCC	3 AA Alkaline (not included)	9.2 oz. (0.26)	7.44" (18.9)	484*, 64**, 17***	4h*, 20h**, 67h***	155*, 56**, 29***	5991*, 796**, 205***	IPX8	N/A	■ (photoluminescent)
	3415MCC	3 AA Alkaline (not included)	9.0 oz. (0.25)	7.44" (18.9)	258 <sup>S/F</sup> , 127 <sup>F</sup> , 144 <sup>S</sup>	5h <sup>S/F</sup> , 13h <sup>F</sup> , 13h <sup>S</sup>	111 <sup>S/F</sup> , 30 <sup>F</sup> , 109 <sup>S</sup>	3109 <sup>S/F</sup> , 231 <sup>F</sup> , 2998 <sup>S</sup>	IPX8	ETL, CI II III, D1, IECEx ia	■

\*High | \*\*Medium | \*\*\*Low | \*\*\*\*Downcast | Additional approvals may apply. For details go to www.pelican.com

	CAT NO.	BATTERIES (included unless noted)	WEIGHT W/ BATTERIES (KG)	LENGTH (CM)	ANSI LIGHT OUTPUT	ANSI RUN TIME	ANSI BEAM DISTANCE (meters)	ANSI PEAK BEAM INTENSITY (candela)	ANSI IPX RATING	CERTIFICATIONS	COLORS
5 SERIES LIGHTS	5000	2 AAA Alkaline	2.4 oz. (0.07)	5.59" (14.2)	202*, 21***	1h 15m*, 7h***	69*, 21***	1176*, 111***	IPX8	N/A	■
	5010	2 AA Alkaline	5.1 oz. (0.15)	6.26" (15.9)	392*, 22***	2h 15m*, 26h***	184*, 43***	8507*, 452***	IPX8	N/A	■
	5020	4 AAA Alkaline	7.3 oz. (0.21)	5.87" (14.9)	586*, 217**, 20***	1h*, 2h 30m**, 27h***	250*, 147**, 44***	15672*, 5368**, 480***	IPX8	N/A	■
	5050R	1 Rechargeable Lithium-Ion	5.8 oz. (0.16)	6.16" (15.6)	883 <sup>B</sup> , 393*, 21***	N/A <sup>B</sup> , 2h 30m*, 40h***	201 <sup>B</sup> , 134*, 30***	10093 <sup>B</sup> , 4488*, 224***	IPX8	N/A	■
	2130	2 L1154 Alkaline	0.5 oz. (0.01)	1.73" (4.4)	4.7 (non ANSI)	130h (non ANSI)	N/A	N/A	IPX7	N/A	■
SPECIALTY LIGHTS	2130IR	2 L1154 Alkaline	0.5 oz. (0.01)	1.73" (4.4)	N/A	65h (non ANSI)	N/A	N/A	IPX7	N/A	■
	2365	2 AA Alkaline (not included)	9.3 oz. (0.26)	21.92" (55.7)	65	7h	81	1644	IPX4	N/A	■
	2490	4 AA Alkaline (not included)	8.2 oz. (0.23)	12.5" (31.7)	64	12h	118	3459	IPX7	N/A	■


	CAT. NO.	BATTERIES (included)	WEIGHT W/ BATTERIES (KG)	LENGTH (CM)	LUMENS	RUN TIME	BEAM SPREAD	NUMBER OF LED <sup>s</sup>	LAMP HEADS	CERTIFICATIONS	COLORS
REMOTE AREA LIGHTING SYSTEMS	9430	Rechargeable, Sealed Lead Acid	22.65 lbs. (10.27)	32.28" (82) <sup>A</sup>	3000*, 1500***	8h*, 15h***	125°	6	1	N/A	■ (High Visibility Yellow)
	9430SL	Rechargeable, Sealed Lead Acid	22.05 lbs. (10)	32.28" (82) <sup>A</sup>	2000*, 1000***	8h*, 15h***	10°	24	1	N/A	■
	9440	Rechargeable Lithium ion	16.09 lbs. (7.3)	85" (215.8) <sup>A</sup>	5300*, 2800**, 1400***	1h 30m*, 4h** 8h***	125°	12	1	N/A	■ (High Visibility Yellow)
	9455	Rechargeable NiMH	16 lbs. (7.3)	31.50" (80) <sup>A</sup>	1600*, 800***	5h*, 10h***	125°	10	1	CI D1, IECEx ia, ATEX Zone 0	■ (High Visibility Yellow)
	9460	Rechargeable, Sealed Lead Acid	61 lbs. (27.7)	79.50" (201.9) <sup>A</sup>	12,000 (variable)	3h*, 24h***	120°	10 per head	2	N/A	■ (High Visibility Yellow)
	9460M	Rechargeable, Sealed Lead Acid	64 lbs. (24.95)	79.50" (201.9) <sup>A</sup>	12,000 (variable)	3h*, 24h***	120°	10 per head	2	N/A	■ (High Visibility Yellow)
	9470	Rechargeable, Sealed Lead Acid	105 lbs. (47.6)	82.00" (208.3) <sup>A</sup>	24,000 (variable)	2h 45m*, 24h***	120°	10 per head	4	N/A	■ (High Visibility Yellow)
	9470M	Rechargeable, Sealed Lead Acid	108lbs. (49)	82.00" (208.3) <sup>A</sup>	24,000 (variable)	2h 45m*, 24h***	120°	10 per head	4	N/A	■ (High Visibility Yellow)
	9480	Rechargeable, Sealed Lead Acid	27.5 lbs. (12.47)	23.75" (60.3) <sup>A</sup>	4000*, 3000**, 1000***	6h*, 8h** 28h***	125°	8	1	N/A	■ (High Visibility Yellow)
	9490	Rechargeable, Sealed Lead Acid	32 lbs. (14.51)	72" (182.8) <sup>A</sup>	6000 (variable)	3h 30m*, 12h** 24h***	125°	10	1	N/A	■ (High Visibility Yellow)
	9500	N/A	29.8 lbs. (13.52)	20.62" (52.4)	6000 (white LED) 1200 (red LED)	constant	210° (diffused)	36 per head	3	N/A	■
	9600	N/A	9.04 lbs. (4.1)	120" (304.8) <sup>A</sup>	3000	constant	125°	14	1	N/A	■ (High Visibility Yellow)

\*High | \*\*Medium | \*\*\*Low | <sup>B</sup> Boost | <sup>S</sup> Spot | <sup>F</sup> Flood | <sup>A</sup> Extended Height | Additional approvals may apply. For details go to www.pelican.com



# CUSTOM LABELS

Pelican Products offers the ultimate in private labeling. You can put your company name and logo or a special statement on many Pelican™ lights. Our in-house private label molding and production department has complete short and long run capabilities for a variety of custom applications and custom colors. We have the latest hot stamping equipment, utilizing the world's most durable inks and foils in our screening, hot tipping, embossing, and molding programs. Laser etching is also available for many of the metal bodied lights

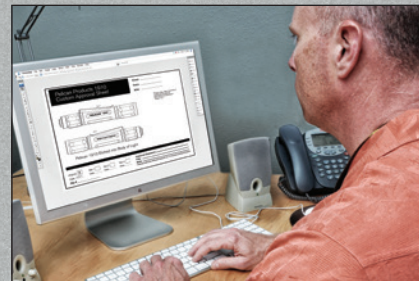

### GRAPHIC DESIGN STUDIO

Our in-house graphics studio will take your logo and size it appropriately to the flashlight of your choice.




### HOT STAMPING

Our hot stamping department is equipped with the latest technology in custom imprinting. Minimum quantities apply.



### LASER ETCHING

Available only on metal bodied lights.

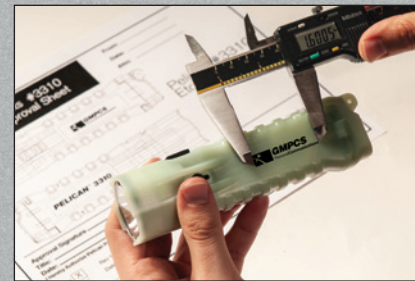

### 100% ACCURACY

Pelican's strict QA inspection team will check for quality of print and 100% accuracy in color and placement.

# PELICAN LIGHTING TOOLS: MORE THAN JUST FLASHLIGHTS.

Here are just a few features that make our lighting tools shine:



**PHOTOLUMINESCENT DESIGNS**  
(on select models only)




**BATTERY LEVEL INDICATION**  
(on select models only)



**INTELLIGENT CONTROL**  
(on select models only)




**SELF-PROGRAMMABLE**  
(on select models only)



**DOWNCAST LIGHTING FEATURES**  
(on select models only)



**GESTURE ACTIVATION**  
(on select models only)



**CORRECT COLOR (HIGH CRI)**



**WIRELESS BLUETOOTH™ CONTROL**  
(on select models only)



**LIMITED LIFETIME WARRANTY**



## FLASHLIGHTS/HEADLAMPS

### PELICAN LIMITED LIFETIME GUARANTEE OF EXCELLENCE

Pelican Products, Inc. ("Pelican") guarantees its lights for a lifetime against breakage or defects in workmanship. This guarantee does not cover the lamp or batteries. Pelican will either repair or replace any defective product, at our sole option. All warranty claims of any nature are barred if the product has been altered, damaged or in any way physically changed, or subjected to abuse, misuse, negligence or accident. Lifetime warranty does not cover Remote Area Lighting Systems products.

In Australia: [www.pelican.com/warranty/](http://www.pelican.com/warranty/)  
For complete warranty details: [www.pelican.com/warranty/](http://www.pelican.com/warranty/)

## REMOTE AREA LIGHTING SYSTEMS

### 1 YEAR LIMITED WARRANTY

Pelican Products, Inc. ("Pelican") guarantees its Remote Area Lighting Systems (RALS) against defects in materials and workmanship under normal use, service, and maintenance for a period of one year from the date of purchase. With valid dated proof of purchase, Pelican will either repair or replace any defective product, at our sole option. All warranty claims of any nature are barred if the product has been altered or in any way physically changed, or subjected to abuse, misuse, negligence or accident.

In Australia: [www.pelican.com/warranty/](http://www.pelican.com/warranty/)  
For complete warranty details: [www.pelican.com/warranty/](http://www.pelican.com/warranty/)

## U.S.A.

### CALIFORNIA

23215 Early Avenue  
Torrance, CA 90505  
Tel: 310.326.4700  
800.473.5422  
Fax: 310.326.3311  
[www.pelican.com](http://www.pelican.com)

### MASSACHUSETTS

147 North Main Street  
South Deerfield, MA 01373  
Tel: 800.542.7344  
Fax: 413.665.8330  
[www.pelican.com](http://www.pelican.com)

### MINNESOTA

Pelican BioThermal Headquarters  
10050 89th Ave N  
Maple Grove, MN 55369  
Tel: 763.412.4800  
877.537.9800  
[www.pelicanbiothermal.com](http://www.pelicanbiothermal.com)

## INTERNATIONAL

### AUSTRALIA

Pelican Products Pty Ltd  
West Wing, Platinum Building,  
Suite 2.33, 4 Ilya Av  
Erina NSW 2250  
Tel: +612 4367 7022  
Fax: +612 4367 7066  
[www.pelicanaustralia.com](http://www.pelicanaustralia.com)

### CANADA

Pelican Products ULC  
10221-184th Street  
Edmonton, Alberta  
T5S 2J4 Canada  
Tel: +780 481 6076  
Fax: +780 481 9586  
[www.pelican.com/ca](http://www.pelican.com/ca)

### CHINA

Pelican Products China Representative Office  
Pine City Building, Room 1026  
777 Zhaojiabang Road  
Shanghai, China 200032  
Tel: +86 21 64189685  
Fax: +86 21 64189679  
[www.pelican.com/cn](http://www.pelican.com/cn)

### EUROPE, MIDDLE EAST AND AFRICA

Peli Products, S.L.U.  
c/ Provença, 388, Planta 7  
08025 · Barcelona, Spain  
Tel: +34 934 674 999  
Fax: +34 934 877 393  
[www.peli.com](http://www.peli.com)

### KOREA

Pelican Products Korea Ltd  
#909 Hyundai 41 Tower, #2616  
917-9, Mok-dong, Yangchon-gu,  
Seoul, Korea 158-050  
Tel: +82 2 6092 4700  
Fax: +82 2 6739 4700

### JAPAN

Pelican Products K.K.  
Nisso 22 Bldg 9F  
1-11-10 Azabu Dai  
Minato ward Tokyo  
106-0041 Japan  
Tel: +81 33 585 9100  
Fax: +81 33 585 9100  
[www.pelican.com/jp](http://www.pelican.com/jp)

### LATIN AMERICA

23215 Early Avenue  
Torrance, California 90505 USA  
Tel: +1 310-326-4700 x 1462  
Fax: +1 310-325-5740  
[www.pelican.com](http://www.pelican.com)

### SE ASIA and Rest of ASIA (Hong Kong, Macau, Taiwan, Pakistan)

19 Tukang Innovation Drive  
Greenhub #04-01  
Singapore 618301  
tel: +65 9298 3322  
[www.pelican.com](http://www.pelican.com)



Part No. 0030-000-200 SE/21

©2021 Pelican Products, Inc.

iOS is a registered trademark of Apple, Inc. ANDROID is a trademark of Google Inc. BLUETOOTH is a registered trademark of Bluetooth Sig, Inc. UNITED is a registered trademark of United Airlines, Inc. NYPD is a trademark of the City of New York. All other trademarks are registered and/or unregistered trademarks of Pelican Products, Inc., its subsidiaries and/or affiliates.

DISTRIBUTED BY:

# IDEMCO

W : [www.idemcosb.com.my](http://www.idemcosb.com.my)  
E : [idemco@idemcosb.com.my](mailto:idemco@idemcosb.com.my)  
T : +6 03-7781 7973

