

## CONTENTS

<b>DURATEK™</b>	
SCREWDRIVERS & SETS . . .	.624-631
<b>DURATEK™</b>	
NUT DRIVERS & SETS . . .	.632-633
SCREWDRIVER KEYCHAIN . . . .	.633
INSULATED SCREWDRIVERS . . . .	.634
DURATEK™ HEX SCREWDRIVERS .	.634
OFFSET SCREWDRIVERS . . . . .	.635
NUT DRIVERS & SETS . . . . .	.635-637
INSULATED NUT DRIVERS . . . . .	.637
NUT SETTERS . . . . .	.638
QUICK CHANGE BIT DRIVERS . . . .	.639
SCREWDRIVER BIT SETS . . . . .	.640-641
BIT SCREWDRIVERS & HOLDERS . .	.642
POWER BIT SET . . . . .	.643
BIT SETS . . . . .	.644-647
INSERT BITS . . . . .	.647-649
BIT HOLDERS & ADAPTERS . . . . .	.650
BIT EXTENSIONS . . . . .	.650
SCREW STARTERS . . . . .	.651
HEX KEYS & SETS . . . . .	.652-662



# SCREWDRIVER GUIDE

**DURATEK**  
PERFORMANCE GRIP

## 360 DEGREE CHEMICAL RESISTANT TEXTURED GRIP

Cleans easily and handles abrasions well.

## HIGH DEMAND ENVIRONMENTS


DuraTek™ screwdrivers feature impact and chemical-resistant handles made from a nylon alloy.

## LIGHT WEIGHT

Light in the hand and comfortable to turn.

## NYLON ALLOY BLENDED MATERIAL

Provides enhanced chemical resistance to industrial solvents.



STUBBY

PRECISION

EXTRA-LONG



### QUARTER MARKS

Visual marks on the handle that let you count the quarter turns.

### GREATER TURNING TORQUE

The grip design is tapered to put the bulk of the handle into the palm of your hand.

The handle is engineered to give the screwdriver more torque when turning.

### NO ROLL

Quad-lobe style handle prevent the screwdriver from rolling away.

### LASER MARKED TIP

for easy identification.



### VDE INSULATED SCREWDRIVERS

Insulated to 1000 AC/1500 V DC. Tested to 10,000 volts.

### VAPOR BLASTED TIPS

Durable tips for longer wear.

### TAMPER-PROOF TORX®

NUT DRIVER

CABINET

KEYSTONE

PHILLIPS

SQUARE

TORX®




## DURATEK™ 19 PIECE COMBINATION SCREWDRIVER SET

Product #: J1219SC



### 3 STEP HIGH-POLISH FINISH WITH VAPOR BLASTED TIP

Provides extra protection against corrosion.



Contents	Description	Tip Size	Tips	Shank Length (in)	Shank Type	Overall Length (in)	Weight (lbs)	ASME Spec.
JCP1803R	Screwdriver, Slotted Cabinet Round 1/8" x 3"	1/8	Cabinet	3	Round	5	0.09	ASME B107.15
JCP1804R	Screwdriver, Slotted Cabinet Round 1/8" x 4"	1/8	Cabinet	4	Round	6	0.09	ASME B107.15
JCP1808R	Screwdriver, Slotted Cabinet Round 1/8" x 8"	1/8	Cabinet	8	Round	10	0.09	ASME B107.15
JC31604R	Screwdriver, Slotted Cabinet Round 3/16" x 4"	3/16	Cabinet	4	Round	7	0.18	ASME B107.15
JC31608R	Screwdriver, Slotted Cabinet Round 3/16" x 8"	3/16	Cabinet	8	Round	11	0.19	ASME B107.15
JK14112R	Screwdriver, Slotted Keystone Round Stubby 1/4" x 1-1/2"	1/4	Keystone	1-1/2	Round	3-1/2	0.12	ASME B107.15
JKB1404RP	Screwdriver, Slotted Keystone Round 1/4" x 4"	1/4	Keystone	4	Round	8	0.27	ASME B107.15
JKB31604RP	Screwdriver, Slotted Keystone Round 3/16" x 4"	3/16	Keystone	4	Round	7	0.19	ASME B107.15
JKB51606RP	Screwdriver, Slotted Keystone Round 5/16" x 6"	5/16	Keystone	6	Round	10	0.41	ASME B107.15
JKB3808RP	Screwdriver, Slotted Keystone Round 3/8" x 8"	3/8	Keystone	8	Round	13	0.60	ASME B107.15
JKB3812RP	Screwdriver, Slotted Keystone Round 3/8" x 12"	3/8	Keystone	12	Round	17	0.77	ASME B107.15
JPP0003R	Screwdriver, Phillips Round # 0 x 3"	#0	Phillips	3	Round	5-3/4	0.08	ASME B107.30
JPO103R	Screwdriver, Phillips Round # 1 x 3"	#1	Phillips	3	Round	6-3/4	0.17	ASME B107.30
JPO108R	Screwdriver, Phillips Round # 1 x 8"	#1	Phillips	8	Round	11-3/4	0.22	ASME B107.30
JPO2112R	Screwdriver, Phillips Round Stubby # 2 x 1-1/2"	#2	Phillips	1-1/2	Round	3-1/2	0.12	ASME B107.30
JPO204R	Screwdriver, Phillips Round # 2 x 4"	#2	Phillips	4	Round	8	0.26	ASME B107.30
JPO208R	Screwdriver, Phillips Round # 2 x 8"	#2	Phillips	8	Round	12	0.31	ASME B107.30
JPO306R	Screwdriver, Phillips Round # 3 x 6"	#3	Phillips	6	Round	10-3/8	0.38	ASME B107.30
JPO408R	Screwdriver, Phillips Round # 4 x 8"	#4	Phillips	8	Round	13	0.57	ASME B107.30

Weight (lbs): 5.26





## DURATEK™ 8 PIECE COMBINATION SCREWDRIVER SET

Product #: J1208SC



DURATEK™ SCREWDRIVER SETS

Contents	Description	Tip Size	Tips	Shank Length (in)	Shank Type	Overall Length (in)	Weight (lbs)	ASME Spec.
JC31603R	Screwdriver, Slotted Cabinet Round 3/16" x 3"	3/16	Cabinet	3	Round	6	0.17	ASME B107.15
JC31604R	Screwdriver, Slotted Cabinet Round 3/16" x 4"	3/16	Cabinet	4	Round	7	0.18	ASME B107.15
JC31605R	Screwdriver, Slotted Cabinet Round 3/16" x 5"	3/16	Cabinet	5	Round	8	0.17	ASME B107.15
JK1404R	Screwdriver, Slotted Keystone Round 1/4" x 4"	1/4	Keystone	4	Round	8	0.25	ASME B107.15
JK51606R	Screwdriver, Slotted Keystone Round 5/16" x 6"	5/16	Keystone	6	Round	10-3/8	0.37	ASME B107.15
JPO103R	Screwdriver, Phillips Round # 1 x 3"	#1	Phillips	3	Round	6-3/4	0.17	ASME B107.30
JPO204R	Screwdriver, Phillips Round # 2 x 4"	#2	Phillips	4	Round	8	0.26	ASME B107.30
JPO306R	Screwdriver, Phillips Round # 3 x 6"	#3	Phillips	6	Round	10-3/8	0.38	ASME B107.30

Weight (lbs): 2.20



## DURATEK™ 8 PIECE COMBINATION SCREWDRIVER SET

Product #: J1208SCP



Contents	Description	Tip Size	Tips	Shank Length (in)	Shank Type	Overall Length (in)	Weight (lbs)	ASME Spec.
JK14112R	Screwdriver, Slotted Keystone Round Stubby 1/4" x 1-1/2"	1/4	Keystone	1-1/2	Round	3-1/2	0.12	ASME B107.15
JKB31603RP	Screwdriver, Slotted Keystone Round 3/16" x 3"	3/16	Keystone	3	Round	7-1/4	0.16	ASME B107.15
JKB1404RP	Screwdriver, Slotted Keystone Round 1/4" x 4"	1/4	Keystone	4	Round	8-1/2	0.26	ASME B107.15
JKB51606RP	Screwdriver, Slotted Keystone Round 5/16" x 6"	5/16	Keystone	6	Round	10-3/4	0.39	ASME B107.15
JKB3808RP	Screwdriver, Slotted Keystone Round 3/8" x 8"	3/8	Keystone	8	Round	13	0.57	ASME B107.15
JPO2112R	Screwdriver, Phillips Round Stubby # 2 x 1-1/2"	#2	Phillips	1-1/2	Round	3-1/2	0.12	ASME B107.30
JPB0103RP	Screwdriver, Phillips Round # 1 x 3"	#1	Phillips	3	Round	6-1/4	0.18	ASME B107.30
JPB0204RP	Screwdriver, Phillips Round # 2 x 4"	#2	Phillips	4	Round	8-1/2	0.27	ASME B107.30

Weight (lbs): 2.35



## DURATEK™ 6 PIECE COMBINATION SCREWDRIVER SET

Product #: **J1206SCP**



Contents	Description	Tip Size	Tips	Shank Length (in)	Shank Type	Overall Length (in)	Weight (lbs)	ASME Spec.
JKB31603RP	Screwdriver, Slotted Keystone Round 3/16" x 3"	3/16	Keystone	3	Round	7-1/4	0.16	ASME B107.15
JKB1404RP	Screwdriver, Slotted Keystone Round 1/4" x 4"	1/4	Keystone	4	Round	8-1/2	0.26	ASME B107.15
JKB51606RP	Screwdriver, Slotted Keystone Round 5/16" x 6"	5/16	Keystone	6	Round	10-3/4	0.39	ASME B107.15
JPB0103RP	Screwdriver, Phillips Round # 1 x 3"	#1	Phillips	3	Round	6-1/4	0.18	ASME B107.30
JPB0204RP	Screwdriver, Phillips Round # 2 x 4"	#2	Phillips	4	Round	8-1/2	0.27	ASME B107.30
JPB0306RP	Screwdriver, Phillips Round # 3 x 6"	#3	Phillips	6	Round	10-3/4	0.40	ASME B107.30

Weight (lbs): 1.89



## DURATEK™ 8 PIECE LONG COMBINATION SCREWDRIVER SET

Product #: **J1208SCL**



Contents	Description	Tip Size	Tips	Shank Length (in)	Shank Type	Overall Length (in)	Weight (lbs)	ASME Spec.
JC31606R	Screwdriver, Slotted Cabinet Round 3/16" x 6"	3/16	Cabinet	6	Round	9	0.20	ASME B107.15
JC1410R	Screwdriver, Slotted Cabinet Round 1/4" x 10"	1/4	Cabinet	10	Round	14	0.34	ASME B107.15
JC1412R	Screwdriver, Slotted Cabinet Round 1/4" x 12"	1/4	Cabinet	12	Round	16	0.39	ASME B107.15
JC1416R	Screwdriver, Slotted Cabinet Round 1/4" x 16"	1/4	Cabinet	16	Round	20	0.39	ASME B107.15
JPD108R	Screwdriver, Phillips Round # 1 x 8"	#1	Phillips	8	Round	11-3/4	0.22	ASME B107.30
JPD208R	Screwdriver, Phillips Round # 2 x 8"	#2	Phillips	8	Round	12	0.31	ASME B107.30
JPD212R	Screwdriver, Phillips Round # 2 x 12"	#2	Phillips	12	Round	16	0.40	ASME B107.30
JPD216R	Screwdriver, Phillips Round # 2 x 16"	#2	Phillips	16	Round	20	0.39	ASME B107.30

Weight (lbs): 2.49





## DURATEK™ 2 PIECE EXTRA-LONG COMBINATION SCREWDRIVER SET

Product #: **J1202SCL**



Contents	Description	Tip Size	Tips	Shank Length (in)	Shank Type	Overall Length (in)	Weight (lbs)	ASME Spec.
JPD224R	Screwdriver, Phillips Round # 2 x 24"	#2	Phillips	24	Round	28-1/2	0.50	ASME B107.30
JK1424R	Screwdriver, Slotted Keystone Round 1/4" x 24"	1/4	Keystone	24	Round	28-1/2	0.51	ASME B107.15

Weight (lbs): 1.05



## DURATEK™ 6 PIECE PHILLIPS SCREWDRIVER SET

Product #: **J1206SP**



Contents	Description	Tip Size	Tips	Shank Length (in)	Shank Type	Overall Length (in)	Weight (lbs)
JPP0003R	Screwdriver, Phillips Round # 0 x 3"	#0	Phillips	3	Round	5-3/4	0.08
JPD103R	Screwdriver, Phillips Round # 1 x 3"	#1	Phillips	3	Round	6-3/4	0.17
JPD2112R	Screwdriver, Phillips Round Stubby # 2 x 1-1/2"	#2	Phillips	1-1/2	Round	3-1/2	0.12
JPD204R	Screwdriver, Phillips Round # 2 x 4"	#2	Phillips	4	Round	8	0.26
JPD306R	Screwdriver, Phillips Round # 3 x 6"	#3	Phillips	6	Round	10-3/8	0.38
JPD408R	Screwdriver, Phillips Round # 4 x 8"	#4	Phillips	8	Round	13	0.57

Weight (lbs): 1.86

ASME B107.30



## DURATEK™ 6 PIECE SLOTTED SCREWDRIVER SET

Product #: **J1206SRF**



Contents	Description	Tip Size	Tips	Shank Length (in)	Shank Type	Overall Length (in)	Weight (lbs)
JC31604R	Screwdriver, Slotted Cabinet Round 3/16" x 4"	3/16	Cabinet	4	Round	7	0.18
JK14112R	Screwdriver, Slotted Keystone Round Stubby 1/4" x 1-1/2"	1/4	Keystone	1-1/2	Round	3-1/2	0.12
JK1404R	Screwdriver, Slotted Keystone Round 1/4" x 4"	1/4	Keystone	4	Round	8	0.25
JK51606R	Screwdriver, Slotted Keystone Round 5/16" x 6"	5/16	Keystone	6	Round	10-3/8	0.37
JK3808R	Screwdriver, Slotted Keystone Round 3/8" x 8"	3/8	Keystone	8	Round	13	0.54
JK3810R	Screwdriver, Slotted Keystone Round 3/8" x 10"	3/8	Keystone	10	Round	11	0.62

Weight (lbs): 2.34

ASME B107.15



## DURATEK™ 9 PIECE TORX® SCREWDRIVER SET

Product #: **J1209ST**



Contents	Description	Tip Size	Tips	Shank Length (in)	Shank Type	Overall Length (in)	Weight (lbs)
JT8314R	Screwdriver, Torx® Round T8 x 3-1/4"	T8	Torx®	3-1/4	Round	7	0.17
JT10314R	Screwdriver, Torx® Round T10 x 3-1/4"	T10	Torx®	3-1/4	Round	7	0.18
JT15314R	Screwdriver, Torx® Round T15 x 3-1/4"	T15	Torx®	3-1/4	Round	7	0.18
JT20314R	Screwdriver, Torx® Round T20 x 3-1/4"	T20	Torx®	3-1/4	Round	7	0.18
JT25314R	Screwdriver, Torx® Round T25 x 3-1/4"	T25	Torx®	3-1/4	Round	7	0.18
JT2704R	Screwdriver, Torx® Round T27 x 4"	T27	Torx®	4	Round	8-1/2	0.26
JT3004R	Screwdriver, Torx® Round T30 x 4"	T30	Torx®	4	Round	8-1/2	0.26
JT4006R	Screwdriver, Torx® Round T40 x 6"	T40	Torx®	6	Round	10-3/4	0.38
JT4506R	Screwdriver, Torx® Round T45 x 6"	T45	Torx®	6	Round	10-3/4	0.38

Weight (lbs): 2.34



## DURATEK™ 7 PIECE TAMPER-PROOF TORX® SCREWDRIVER SET

Product #: **J1207STP**



Contents	Description	Tip Size	Tips	Shank Length (in)	Shank Type	Overall Length (in)	Weight (lbs)
JTP8008R	Screwdriver, Tamper-Proof Torx® Round T8 x 3-1/4"	TP8	Tamper-Proof Torx®	8	Round	12-1/4	0.17
JTP1008R	Screwdriver, Tamper-Proof Torx® Round T10 x 3-1/4"	TP10	Tamper-Proof Torx®	8	Round	12-1/4	0.18
JTP1508R	Screwdriver, Tamper-Proof Torx® Round T15 x 3-1/4"	TP15	Tamper-Proof Torx®	8	Round	12-1/4	0.18
JTP2008R	Screwdriver, Tamper-Proof Torx® Round T20 x 3-1/4"	TP20	Tamper-Proof Torx®	8	Round	12-1/4	0.18
JTP2508R	Screwdriver, Tamper-Proof Torx® Round T25 x 3-1/4"	TP25	Tamper-Proof Torx®	8	Round	12-1/4	0.18
JTP2708R	Screwdriver, Tamper-Proof Torx® Round T27 x 4"	TP27	Tamper-Proof Torx®	8	Round	12-1/2	0.26
JTP3008R	Screwdriver, Tamper-Proof Torx® Round T30 x 4"	TP30	Tamper-Proof Torx®	8	Round	12-1/2	0.26

Weight (lbs): 1.77



Torx® is a trademark of Acument Intellectual Properties, LLC





## DURATEK™ 4 PIECE PRECISION COMBINATION SCREWDRIVER SET

Product #: J1204SC



Contents	Description	Tip Size	Tips	Shank Length (in)	Shank Type	Overall Length (in)	Weight (lbs)	ASME Spec.
JCP1803R	Screwdriver, Slotted Cabinet Round 1/8" x 3"	1/8	Cabinet	3	Round	5	0.09	ASME B107.15
JCP31603R	Screwdriver, Slotted Cabinet Round 3/16" x 3"	3/16	Cabinet	3	Round	6-5/16	0.10	ASME B107.15
JPP0003R	Screwdriver, Phillips Round # 0 x 3"	#0	Phillips	3	Round	5-3/4	0.08	ASME B107.30
JPP0103R	Screwdriver, Phillips Round # 1 x 3"	#1	Phillips	3	Round	6-5/16	0.10	ASME B107.30

Weight (lbs): 0.40



## DURATEK™ 2 PIECE PRECISION COMBINATION SCREWDRIVER SET

Product #: J1202SC



Contents	Description	Tip Size	Tips	Shank Length (in)	Shank Type	Overall Length (in)	Weight (lbs)	ASME Spec.
JCP1802R	Screwdriver, Slotted Cabinet Round 1/8" x 2"	1/8	Cabinet	2	Round	4	0.08	ASME B107.15
JPP0002R	Screwdriver, Phillips Round # 0 x 2"	#0	Phillips	2	Round	4-1/2	0.08	ASME B107.30

Weight (lbs): 0.21



## DURATEK™ 4 PIECE SQUARE TIP SCREWDRIVER SET

Product #: J1204SS



Color coded to the sizes.



Contents	Description	Tip Size	Tips	Shank Length (in)	Shank Type	Overall Length (in)	Weight (lbs)
JS0005R	Screwdriver, Square Tip, Round # 0 x 5"	#0	Square	5	Round	9	0.19
JS0105R	Screwdriver, Square Tip, Round # 1 x 5"	#1	Square	5	Round	9-1/4	0.19
JS0205R	Screwdriver, Square Tip, Round # 2 x 5"	#2	Square	5	Round	9-1/4	0.19
JS0305R	Screwdriver, Square Tip, Round # 3 x 5"	#3	Square	5	Round	9-1/4	0.19

Weight (lbs): 0.70



## DURATEK™ PERFORMANCE GRIP SCREWDRIVERS






Product #	Tip Size	Tips	Shank Length (in)	Shank Type	Bolster	Overall Length (in)	Weight (lbs)	ASME Spec.
JCP1802R	1/8	Cabinet	2	Round	–	4	0.08	ASME B107.15
JCP1803R	1/8	Cabinet	3	Round	–	5	0.09	ASME B107.15
JCP1804R	1/8	Cabinet	4	Round	–	6	0.09	ASME B107.15
JCP1806R	1/8	Cabinet	6	Round	–	8	0.10	ASME B107.15
JCP1808R	1/8	Cabinet	8	Round	–	10	0.09	ASME B107.15
JCP31603R	3/16	Cabinet	3	Round	–	6-5/16	0.10	ASME B107.15
JC31603R	3/16	Cabinet	3	Round	–	6	0.17	ASME B107.15
JC31604R	3/16	Cabinet	4	Round	–	7	0.18	ASME B107.15
JC31605R	3/16	Cabinet	5	Round	–	8	0.17	ASME B107.15
JC31606R	3/16	Cabinet	6	Round	–	9	0.20	ASME B107.15
JC31608R	3/16	Cabinet	8	Round	–	11	0.19	ASME B107.15
JC31610R	3/16	Cabinet	10	Round	–	13	0.24	ASME B107.15
JC31612R	3/16	Cabinet	12	Round	–	15	0.27	ASME B107.15
JC1410R	1/4	Cabinet	10	Round	–	14	0.34	ASME B107.15
JC1412R	1/4	Cabinet	12	Round	–	16	0.39	ASME B107.15
JC1416R	1/4	Cabinet	16	Round	–	20	0.39	ASME B107.15
JKB31603RP	3/16	Keystone	3	Round	Yes	7-1/4	0.16	ASME B107.15
JKB31604RP	3/16	Keystone	4	Round	Yes	7	0.19	ASME B107.15
JK14112R	1/4	Keystone	1-1/2	Round	–	3-1/2	0.12	ASME B107.15
JKB1404RP	1/4	Keystone	4	Round	Yes	8	0.27	ASME B107.15
JK1404R	1/4	Keystone	4	Round	–	8	0.25	ASME B107.15
JKB1404RP	1/4	Keystone	4	Round	Yes	8-1/2	0.26	ASME B107.15
JK1406R	1/4	Keystone	6	Round	–	10	0.29	ASME B107.15
JK1424R	1/4	Keystone	24	Round	–	28-1/2	0.51	ASME B107.15
JK51604R	5/16	Keystone	4	Round	–	8-3/8	0.33	ASME B107.15
JKB51606RP	5/16	Keystone	6	Round	Yes	10	0.41	ASME B107.15
JKB51606RP	5/16	Keystone	6	Round	Yes	10-3/4	0.39	ASME B107.15
JK51606R	5/16	Keystone	6	Round	–	10-3/8	0.37	ASME B107.15
JK51608R	5/16	Keystone	8	Round	–	12-3/8	0.41	ASME B107.15
JKB3808RP	3/8	Keystone	8	Round	Yes	13	0.57	ASME B107.15
JK3808R	3/8	Keystone	8	Round	–	13	0.54	ASME B107.15
JKB3808RP	3/8	Keystone	8	Round	Yes	13	0.60	ASME B107.15
JK3810R	3/8	Keystone	10	Round	–	11	0.62	ASME B107.15
JK3812R	3/8	Keystone	12	Round	–	17	0.69	ASME B107.15
JKB3812RP	3/8	Keystone	12	Round	Yes	17	0.77	ASME B107.15

Torx® is a trademark of Acument Intellectual Properties, LLC



## DURATEK™ PERFORMANCE GRIP SCREWDRIVERS (CONT'D)



Product #	Tip Size	Tips	Shank Length (in)	Shank Type	Bolster	Overall Length (in)	Weight (lbs)	ASME Spec.
JPP0002R	#0	Phillips	2	Round	–	4-1/2	0.08	ASME B107.30
JPP0003R	#0	Phillips	3	Round	–	5-3/4	0.08	ASME B107.30
JPP0103R	#1	Phillips	3	Round	–	6-5/16	0.10	ASME B107.30
JPB0103RP	#1	Phillips	3	Round	Yes	6-1/4	0.18	ASME B107.30
JP0103R	#1	Phillips	3	Round	–	6-3/4	0.17	ASME B107.30
JP0108R	#1	Phillips	8	Round	–	11-3/4	0.22	ASME B107.30
JP02112R	#2	Phillips	1-1/2	Round	–	3-1/2	0.12	ASME B107.30
JPB0204RP	#2	Phillips	4	Round	Yes	8-1/2	0.27	ASME B107.30
JP0204R	#2	Phillips	4	Round	–	8	0.26	ASME B107.30
JP0208R	#2	Phillips	8	Round	–	12	0.31	ASME B107.30
JP0212R	#2	Phillips	12	Round	Yes	16	0.40	ASME B107.30
JP0216R	#2	Phillips	16	Round	Yes	20	0.39	ASME B107.30
JP0224R	#2	Phillips	24	Round	–	28-1/2	0.50	ASME B107.30
JPB0306RP	#3	Phillips	6	Round	Yes	10-3/4	0.40	ASME B107.30
JP0306R	#3	Phillips	6	Round	–	10-3/8	0.38	ASME B107.30
JP0408R	#4	Phillips	8	Round	–	13	0.57	ASME B107.30
JS0005R	#0	Square	5	Round	–	9	0.19	–
JS0105R	#1	Square	5	Round	–	9-1/4	0.19	–
JS0205R	#2	Square	5	Round	–	9-1/4	0.19	–
JS0305R	#3	Square	5	Round	–	9-1/4	0.19	–
JT8314R	T8	Torx®	3-1/4	Round	–	7	0.17	–
JT10314R	T10	Torx®	3-1/4	Round	–	7	0.18	–
JT15314R	T15	Torx®	3-1/4	Round	–	7	0.18	–
JT20314R	T20	Torx®	3-1/4	Round	–	7	0.18	–
JT25314R	T25	Torx®	3-1/4	Round	–	7	0.18	–
JT2704R	T27	Torx®	4	Round	–	8-1/2	0.26	–
JT3004R	T30	Torx®	4	Round	–	8-1/2	0.26	–
JT4006R	T40	Torx®	6	Round	–	10-3/4	0.38	–
JT4506R	T45	Torx®	6	Round	–	10-3/4	0.38	–
JTP8008R	TP8	Tamper-Proof Torx®	8	Round	–	12-1/4	0.17	–
JTP1008R	TP10	Tamper-Proof Torx®	8	Round	–	12-1/4	0.18	–
JTP1508R	TP15	Tamper-Proof Torx®	8	Round	–	12-1/4	0.18	–
JTP2008R	TP20	Tamper-Proof Torx®	8	Round	–	12-1/4	0.18	–
JTP2508R	TP25	Tamper-Proof Torx®	8	Round	–	12-1/4	0.18	–
JTP2708R	TP27	Tamper-Proof Torx®	8	Round	–	12-1/2	0.26	–
JTP3008R	TP30	Tamper-Proof Torx®	8	Round	–	12-1/2	0.26	–


## DURATEK™ 19 PIECE NUT DRIVER SET

Product #: J12000S

Contents	INCH	MM	Shank Length (in)	Overall Length (in)
JN31604R	3/16	–	4	8-1/2
JN1404R	1/4	–	4	8-4/5
JN51604R	5/16	–	4	8-1/2
JN113204R	11/32	–	4	8-4/5
JN3804R	3/8	–	4	8-1/2
JN71604R	7/16	–	4	9
JN1204R	1/2	–	4	9
JN0404RM	–	4	4	8-1/2
JN0504RM	–	5	4	8-1/2
JN5504RM	–	5.5	4	8-1/2
JN0604RM	–	6	4	8-1/2
JN0704RM	–	7	4	8-3/5
JN0804RM	–	8	4	8-4/5
JN0904RM	–	9	4	8-4/5
JN1004RM	–	10	4	9
JN1104RM	–	11	4	9
JN1204RM	–	12	4	9
JN1304RM	–	13	4	9
JN1404RM	–	14	4	9

Weight (lbs): 6.58

ASME B107.12 

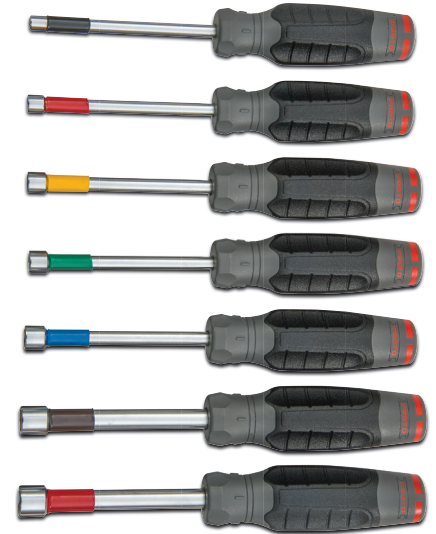


Fractional

## DURATEK™ 7 PIECE FRACTIONAL NUT DRIVER SET

Product #: J1207SND

Contents	INCH	Shank Length (in)	Overall Length (in) (L)
JN31604R	3/16	4	8-1/2
JN1404R	1/4	4	8-4/5
JN51604R	5/16	4	8-1/2
JN113204R	11/32	4	8-4/5
JN3804R	3/8	4	8-1/2
JN71604R	7/16	4	9
JN1204R	1/2	4	9

Weight (lbs): 2.49

ASME B107.12 




Metric

## DURATEK™ 12 PIECE METRIC NUT DRIVER SET

Product #: J1212MND

Contents	MM	Shank Length (in)	Overall Length (in) (L)
JN0404RM	4	4	8-1/2
JN0504RM	5	4	8-1/2
JN5504RM	5.5	4	8-1/2
JN0604RM	6	4	8-1/2
JN0704RM	7	4	8-3/5
JN0804RM	8	4	8-4/5
JN0904RM	9	4	8-4/5
JN1004RM	10	4	9
JN1104RM	11	4	9
JN1204RM	12	4	9
JN1304RM	13	4	9
JN1404RM	14	4	9

Weight (lbs): 4.09

ASME B107.12 



## DURATEK™ PERFORMANCE GRIP NUT DRIVERS

- › Ergonomic quad-lobe handle design with 360° texture grip for additional grip.
- › Designed to meet demanding heavy-duty needs of industrial maintenance and assembly applications.
- › Screwdrivers meet ASME B107.15 standards.
- › Made in USA.

### HANDLE

- › Impact and chemical resistance handles are four-sided with broad but shallow flutes.
- › Resistant to most harsh chemicals (including hydraulic fluids used in the aerospace industry).
- › Four-sided handle design helps prevent "roll away" from the work surface.



Color coded to the sizes.



DURATEK™ NUT DRIVERS & SLOTTED KEYCHAIN

Product #	INCH	MM	Shank Length (in)	Overall Length (in)	Weight (lbs)
JN31604R	3/16	–	4	8-1/2	0.26
JN1404R	1/4	–	4	8-4/5	0.26
JN51604R	5/16	–	4	8-1/2	0.30
JN113204R	11/32	–	4	8-4/5	0.30
JN3804R	3/8	–	4	8-3/4	0.30
JN71604R	7/16	–	4	9	0.40
JN1204R	1/2	–	4	9	0.41
JN0404RM	–	4	4	8-1/2	0.26
JN0504RM	–	5	4	8-1/2	0.26
JN5504RM	–	5.5	4	8-1/2	0.26
JN0604RM	–	6	4	8-1/2	0.26
JN0704RM	–	7	4	8-3/5	0.26
JN0804RM	–	8	4	8-4/5	0.30
JN0904RM	–	9	4	8-4/5	0.30
JN1004RM	–	10	4	9	0.41
JN1104RM	–	11	4	9	0.40
JN1204RM	–	12	4	9	0.41
JN1304RM	–	13	4	9	0.41
JN1404RM	–	14	4	9	0.47

ASME B107.12

## SLOTTED SCREWDRIVER KEYCHAIN

Product #	Tip Size (in)	Overall Length (in) (L)
J100	3/16	2-3/8



## 5 PIECE INSULATED VDE SCREWDRIVER SET

Product #: **J90000-VDE**

- › DuraTek™ performance grip.
- › Insulated to 1000V AC / 1500 V DC.
- › Meets IEC 60900 & ASTM F1505 standards.
- › Slim shank technology for improved access.\*
- › Precision machined tips for secure fastener engagement.
- › Tested to 10,000 volts.



Contents	Description	Tip Size	Tips	Shank Length (in)	Shank Type	Overall Length (in)	Weight (lbs)
J90001-VDE	Screwdriver, Phillips #1 x 4"	#1	Phillips	4	Round/Slim Tip	8-7/16	0.18
J90002-VDE	Screwdriver, Phillips #2 x 5"	#2	Phillips	5	Round/Slim Tip	9-7/16	0.23
J90003-VDE	Screwdriver, Cabinet 9/64" x 4"	9/64	Cabinet	4	Round/Slim Tip	8-7/16	0.16
J90004-VDE	Screwdriver, Cabinet 5/32" x 4"	5/32	Cabinet	4	Round/Slim Tip	8-7/16	0.17
J90005-VDE	Screwdriver, Cabinet 7/32" x 5"	7/32	Cabinet	5	Round/Slim Tip	9-7/16	0.21

Weight (lbs): 1.05

\*Up to 27% blade reduction

## VDE INSULATED SCREWDRIVERS



Product #	Tip Size	Tips	Shank Length (in)	Shank Type	Overall Length (in)	Weight (lbs)	Rating
<b>J90001-VDE</b>	#1	Phillips	4	Round/Slim Tip	8-7/16	0.18	VDE, IEC 60900, ASTM F1505
<b>J90002-VDE</b>	#2	Phillips	5	Round/Slim Tip	9-7/16	0.23	VDE, IEC 60900, ASTM F1506
<b>J90003-VDE</b>	9/64	Cabinet	4	Round/Slim Tip	8-7/16	0.16	VDE, IEC 60900, ASTM F1507
<b>J90004-VDE</b>	5/32	Cabinet	4	Round/Slim Tip	8-7/16	0.17	VDE, IEC 60900, ASTM F1508
<b>J90005-VDE</b>	7/32	Cabinet	5	Round/Slim Tip	9-7/16	0.21	VDE, IEC 60900, ASTM F1509

## DURATEK™ PERFORMANCE GRIP HEX SCREWDRIVERS

- › Ball end speed hex tips.
- › Made of high-alloy steel.
- › Precision machined for precise fastener fit.
- › Tips feature a black oxide finish to help prevent chrome peeling.



JH53204



JH33203

Product #	Tip Size	Tips	Shank Length (in)	Overall Length (in)	Weight (lbs)
<b>JH11603</b>	1/16	Speed Hex	2-1/2	6	0.07
<b>JH1803</b>	1/8	Speed Hex	3-1/8	7-3/8	0.15
<b>JH31604</b>	3/16	Speed Hex	3-3/4	8-1/4	0.22
<b>JH33203</b>	5/32	Speed Hex	2-3/4	6-1/4	0.07
<b>JH53204</b>	5/32	Speed Hex	3-1/2	8	0.22
<b>JH56403</b>	5/64	Speed Hex	2-5/8	6-1/8	0.07
<b>JH76403</b>	7/64	Speed Hex	3	7-1/4	0.15
<b>JH96403</b>	9/64	Speed Hex	3-1/4	7-1/2	0.15





## OFFSET SCREWDRIVERS

- › Black oxide finish.
- › Designed for use in tight spaces.

Product #	Type	Tip Width (in)	Overall Length (in)	Weight (lbs)
<b>J361/4</b>	Slotted	1/4	4-5/8	0.05
<b>J365/16</b>	Slotted	5/16	4-7/8	0.13
<b>J363/8</b>	Slotted	3/8	6-1/8	0.12
<b>J341/4</b>	Phillips	#1, #2	4-3/4	0.07
<b>J343/8</b>	Phillips	#3, #4	6-1/8	0.12



## 11 PIECE NUT DRIVER SET

Product #: **J9200B**

- › Precision formed, heat-treated hex openings.
- › Color coded handles for easy identification.
- › One-piece shaft design for greater strength and durability.

Contents	INCH	Shank Length (in)	Overall Length (in)
J9206	3/16	2-3/4	6-3/4
J9207	7/32	2-3/4	6-3/4
J9208	1/4	2-3/4	6-3/4
J9209	9/32	2-3/4	6-3/4
J9210	5/16	2-3/4	6-3/4
J9211	11/32	2-3/4	6-3/4
J9212	3/8	2-3/4	6-3/4
J9214	7/16	2-3/4	7
J9216	1/2	2-3/4	7
J9218	9/16	2-3/4	7
J9220	5/8	2-3/4	7
J9200DPB	Blow-Molded Case		

Weight (lbs): 4.22

ASME B107.12



## 7 PIECE NUT DRIVER SET

Product #: **J9200C**

- › Precision formed, heat-treated hex openings.
- › Color coded handles for easy identification.
- › One-piece shaft design for greater strength and durability.

Contents	INCH	Shank Length (in)	Overall Length (in)
J9206	3/16	2-3/4	6-3/4
J9207	7/32	2-3/4	6-3/4
J9208	1/4	2-3/4	6-3/4
J9209	9/32	2-3/4	6-3/4
J9210	5/16	2-3/4	6-3/4
J9211	11/32	2-3/4	6-3/4
J9212	3/8	2-3/4	6-3/4
J25TR24C	Pouch		

Weight (lbs): 1.77

ASME B107.12




## 11 PIECE METRIC NUT DRIVER SET

Product #: **J9201MB**

- › Precision formed, heat-treated hex openings.
- › One-piece shaft design for greater strength and durability.
- › Ideal for electronics, assembly, and various industrial applications.
- › Blue handle for easy metric identification.

Contents	MM	Length (in)	Overall Length (in)
J9204M	4	2-7/8	6-3/4
J9205M	5	2-7/8	6-3/4
J92055M	5.5	2-7/8	6-3/4
J9206M	6	2-7/8	6-3/4
J9207M	7	2-7/8	6-3/4
J9208M	8	2-7/8	6-3/4
J9209M	9	2-7/8	6-3/4
J92010M	10	2-7/8	6-3/4
J92011M	11	2-7/8	6-3/4
J92013M	13	2-7/8	7
J92014M	14	2-7/8	7
J9200DPB	Blow-Molded Case		

Weight (lbs): 4.39

ASME B107.12 




## 7 PIECE METRIC NUT DRIVER SET

Product #: **J9230M**

- › Precision formed, heat-treated hex openings.
- › One-piece shaft design for greater strength and durability.
- › Ideal for electronics, assembly, and various industrial applications.
- › Blue handle for easy metric identification.

Contents	MM	Length (in)	Overall Length (in)
J92055M	5.5	2-7/8	6-3/4
J9205M	5	2-7/8	6-3/4
J9206M	6	2-7/8	6-3/4
J9207M	7	2-7/8	6-3/4
J9208M	8	2-7/8	6-3/4
J9209M	9	2-7/8	6-3/4
J9210M	10	2-7/8	6-3/4
J2488	Pouch		

Weight (lbs): 1.59

ASME B107.12 








## TRADITIONAL NUT DRIVERS

- › Full hollow shaft design for maximum bolt clearance (part numbers ending with "H").
- › One-piece shaft design for greater strength and durability.
- › Ideal for electronics, assembly, and various industrial applications.
- › Color coded handles for easy size identification.



	Product #	INCH	MM	Shank Length (in)	Overall Length (in)	Weight (lbs)
Hollow Shaft:	J9206H	3/16	-	2-3/4	6-11/16	0.18
	J9208H	1/4	-	2-3/4	6-11/16	0.18
	J9210H	5/16	-	2-3/4	6-11/16	0.19
	J9211H	11/32	-	2-3/4	6-11/16	0.22
	J9212H	3/8	-	2-3/4	6-11/16	0.19
	J9214H	7/16	-	2-3/4	6-11/16	0.27
	J9216H	1/2	-	2-3/4	6-11/16	0.27
	J9206	3/16	-	2-3/4	6-11/16	0.20
	J9207	7/32	-	2-3/4	6-11/16	0.20
	J9208	1/4	-	2-3/4	6-11/16	0.19
	J9209	9/32	-	2-3/4	6-11/16	0.23
	J9210	5/16	-	2-3/4	6-11/16	0.23
	J9211	11/32	-	2-3/4	6-11/16	0.22
	J9212	3/8	-	2-3/4	6-11/16	0.23
	J9214	7/16	-	2-3/4	7	0.34
	J9216	1/2	-	2-3/4	7	0.34
	J9218	9/16	-	2-3/4	7	0.45
	J9220	5/8	-	2-3/4	7	0.50
	J9204M	-	4	2-7/8	7	0.19
	J9205M	-	5	2-7/8	7	0.19
	J92055M	-	5.5	2-7/8	7	0.19
	J9206M	-	6	2-7/8	7	0.19
	J9207M	-	7	2-7/8	7	0.22
	J9208M	-	8	2-7/8	7	0.22
	J9209M	-	9	2-7/8	7	0.24
	J9210M	-	10	2-7/8	7	0.29
	J9211M	-	11	2-7/8	7	0.36
	J9212M	-	12	2-7/8	7	0.36
	J9213M	-	13	2-7/8	7	0.43
	J9214M	-	14	2-7/8	7	0.50

ASME B107.12 

## FACOM® INSULATED T-HANDLE NUT DRIVERS

- › Insulated to 1000V AC or 1500 DC.



Product #	MM	Overall Length (in)	Weight (lbs)
94T.6AVSE	6	5-3/4	0.33
94T.8AVSE	8	5-3/4	0.36
94T.10AVSE	10	5-3/4	0.41
94T.11AVSE	11	5-3/4	0.47
94T.12AVSE	12	5-3/4	0.47
94T.13AVSE	13	5-3/4	0.50
94T.14AVSE	14	5-3/4	0.50
94TL.10AVSE	10	12-1/2	0.91
94TL.13AVSE	13	12-1/2	1.15
94TL.16AVSE	16	12-1/2	1.85
94TL.17AVSE	17	12-1/2	1.92
94TL.19AVSE	19	12-1/2	2.06



### 3 PIECE NUT SETTER SET - 1/4" HEX SHANK

Product #: **J61909HS**

- › Proto® TorquePlus™ design is a high performance drive configuration which allows for quick and easy engagement to the fastener flats, not the corners.
- › The TorquePlus™ configuration employs a radius-corner design, shifting contact area and stress away from the fastener corners and distributing contact stresses over a large area of the socket, minimizing slippage.
- › The TorquePlus™ internal design minimizes fastener rounding, helps to extend fastener life, and allows the user to more easily turn worn, rounded, or rusted fasteners.
- › Magnets feature enhanced holding power to help improve fastener retention, helping to increase productivity.

Contents	INCH	Overall Length (in)
J61620HS	1/4	2-9/16
J61622HS	5/16	1-9/16
J61624HS	3/8	1-9/16

Weight (lbs): 0.21



- › Radius-corner socket design
- › Engages flats for better grip
- › Improves the ability to turn worn or rounded fasteners

### 1/4" HEX MAGNETIC NUT SETTERS

- › Magnets feature enhanced holding power to help improve fastener retention, helping to increase productivity.

Product #	INCH	Drive End Outside Dia. (in)	Overall Length (in)	Weight (lbs)
<b>J61620</b>	1/4	7/16	2-9/16	0.06
<b>J61622</b>	5/16	1/2	2-9/16	0.07
<b>J61624</b>	3/8	9/16	2-9/16	0.07
<b>J61626</b>	7/16	5/8	2-9/16	0.09
<b>J61650</b>	1/4	7/16	1-3/4	0.04
<b>J61652</b>	5/16	1/2	1-3/4	0.05
<b>J61654</b>	3/8	9/16	1-3/4	0.05
<b>J61656</b>	7/16	5/8	1-3/4	0.07



Product #	MM	Drive End Outside Dia. (in)	Overall Length (in)	Weight (lbs)
<b>J61690</b>	6 mm	7/16	1-3/4	0.04
<b>J61692</b>	8 mm	1/2	1-3/4	0.05
<b>J61694</b>	10 mm	9/16	1-3/4	0.05





## 11-IN-1 QUICK CHANGE BIT DRIVER

**Product #: J93111**

- ▶ Industrial strength bits with blast finished Tips for a firm hold, helps reduce cam-out.
- ▶ Integrated screwdriver/nut driver shaft holds 4 bits and converts to 3 nut driver size.
- ▶ Comfort grip handle, allows user to apply torque control.



Contents	Description	Tip Size	Tips
J93002	Bit, Insert Phillips #1 x #2	#1 x #2	Phillips
J93001	Bit, Insert Slotted 3/16" x 1/4"	3/16" x 1/4"	Slotted
J93003	Bit, Insert Square Recess #1 x #2	#1 x #2	Square
J93004	Bit, Insert Torx® T10 x T20	T10 x T20	Torx®
-	Bit, Insert Hex 1/4"	1/4"	Hex - Nut Driver
-	Bit, Insert Hex 5/16"	5/16"	Hex - Nut Driver
-	Bit, Insert Hex 3/8"	3/8"	Hex - Nut Driver

## 10-IN-1 QUICK CHANGE BIT DRIVER

**Product #: J93101**

- ▶ Industrial strength bits with blast finished Tips for a firm hold, helps reduce cam-out.
- ▶ Integrated screwdriver/nut driver shaft holds 4 bits and converts to 2 nut driver size.
- ▶ Comfort grip handle, allows user to apply torque control.



Contents	Description	Tip Size	Tips
J93002	Bit, Insert Phillips #1 x #2	#1 x #2	Phillips
J93001	Bit, Insert Slotted 3/16" x 1/4"	3/16" x 1/4"	Slotted
J93003	Bit, Insert Square Recess #1 x #2	#1 x #2	Square
J93004	Bit, Insert Torx® T10 x T20	T10 x T20	Torx®
-	Bit, Insert Hex 1/4"	1/4"	Hex - Nut Driver
-	Bit, Insert Hex 5/16"	5/16"	Hex - Nut Driver

## 5-IN-1 QUICK CHANGE BIT DRIVER

**Product #: J9351**

- ▶ Industrial strength bits with blast finished Tips for a firm hold, helps reduce cam-out.
- ▶ Integrated screwdriver/nut driver shaft holds 2 bits and converts to 1 nut driver size.
- ▶ Comfort grip handle, allows user to apply torque control.



Contents	Description	Tip Size	Tips
J93002	Bit, Insert Phillips #1 x #2	#1 x #2	Phillips
J93001	Bit, Insert Slotted 3/16" x 1/4"	3/16" x 1/4"	Slotted
-	Bit, Insert Hex 5/16"	5/16"	Hex - Nut Driver

## 28 PIECE MAGNETIC SCREWDRIVER BIT SET

Product #: **J61929**

- Packaged in plastic blow-molded case for easy storage.



Description	Tip Size	Tips	Overall Length (in)	Drive Size
Bit, Insert #0 Phillips 1/4" Hex	0	Phillips	1	1/4
Bit, Insert #1 Phillips 1/4" Hex	1	Phillips	1	1/4
Bit, Insert #2 Phillips 1/4" Hex	2	Phillips	1	1/4
Bit, Insert #3 Phillips 1/4" Hex	3	Phillips	1	1/4
Bit, Insert Slotted 3F-4R 1/4" Hex	3F-4R	Slotted	1	1/4
Bit, Insert Slotted 4F-5R 1/4" Hex	4F-5R	Slotted	1	1/4
Bit, Insert 7/32" Slotted 1/4" Hex	7/32	Slotted	1	1/4
Bit, Insert 5/32" Slotted 1/4" Hex	5/32	Slotted	1	1/4
Bit, Insert 9/32" Slotted 1/4" Hex	9/32	Slotted	1	1/4
Bit, Insert T10 Torx® 1/4" Hex	T10	Torx®	1	1/4
Bit, Insert T15 Torx® 1/4" Hex	T15	Torx®	1	1/4
Bit, Insert T20 Torx® 1/4" Hex	T20	Torx®	1	1/4
Bit, Insert T25 Torx® 1/4" Hex	T25	Torx®	1	1/4
Bit, Insert T30 Torx® 1/4" Hex	T30	Torx®	1	1/4
Bit, Insert T40 Torx® 1/4" Hex	T40	Torx®	1	1/4
Bit, Insert #0 Square Recess 1/4" Hex	0	Square	1	1/4
Bit, Insert #1 Square Recess 1/4" Hex	1	Square	1	1/4
Bit, Insert #2 Square Recess 1/4" Hex	2	Square	1	1/4
Bit, Insert #3 Square Recess 1/4" Hex	3	Square	1	1/4
5/64" Socket Head, 1/4" Hex	5/64	Socket	1	1/4
3/32" Socket Head, 1/4" Hex	3/32	Socket	1-1/4	1/4
1/8" Socket Head, 1/4" Hex	1/8	Socket	1-1/4	1/4
5/32" Socket Head, 1/4" Hex	5/32	Socket	1-1/4	1/4
3/16" Socket Head, 1/4" Hex	3/16	Socket	1-1/4	1/4
Bit, Insert 1/8" Clutch, 1/4" Hex	1/8	Clutch	1	1/4
Bit, Insert 5/32" Clutch, 1/4" Hex	5/32	Clutch	1	1/4
Magnetic Bit, Holder	-	-	2-1/4	1/4
Screwdriver, Magnetic Bit, Holder	-	-	7-9/16	1/4

Weight (lbs): 1.07



Torx® is a trademark of Acument Intellectual Properties, LLC



## 11 PIECE MAGNETIC RATCHETING SCREWDRIVER BIT SET

Product #: J9322

- › Gearless Ratcheting Screwdriver provides smooth operation, infinite ratcheting angle.
- › Convenient bit storage in handle.



Contents	Description	Size	Tips	Overall Length (in)	Drive Size (in)
J60002	Bit, Insert #1 Phillips 1/4" Hex	#1	Phillips	1	1/4
J60008	Bit, Insert #2 Phillips 1/4" Hex	#2	Phillips	1	1/4
J60202	Bit, Insert 3/16" Slotted 1/4" Hex	3/16"	Slotted	1	1/4
J60206	Bit, Insert 5/16" Slotted 1/4" Hex	5/32"	Slotted	1	1/4
-	Nut Setters Magnetic	3/16"	-	1-1/2	1/4
-	Nut Setters Magnetic	1/4"	-	1-1/2	1/4
-	Nut Setters Magnetic	9/32"	-	1-1/2	1/4
-	Nut Setters Magnetic	5/16"	-	1-1/2	1/4
-	Nut Setters Magnetic	11/32"	-	1-1/2	1/4
-	Nut Setters Magnetic	7/16"	-	1-1/2	1/4
-	Screwdriver, Magnetic Ratcheting	-	-	8-3/4	1/4

Weight (lbs): 0.76



## 5 PIECE MAGNETIC RATCHETING SCREWDRIVER BIT SET

Product #: J9320

- › Gearless Ratcheting Screwdriver provides smooth operation, infinite ratcheting angle.
- › Convenient bit storage in handle.



Contents	Description	Tip Size	Tips	Overall Length (in)	Drive Size (in)
J60002	Bit, Insert #1 Phillips 1/4" Hex	#1	Phillips	1	1/4
J60008	Bit, Insert #2 Phillips 1/4" Hex	#2	Phillips	1	1/4
J60202	Bit, Insert 3/16" Slotted 1/4" Hex	3/16"	Slotted	1	1/4
J60206	Bit, Insert 5/16" Slotted 1/4" Hex	5/32"	Slotted	1	1/4
-	Screwdriver, Magnetic Ratcheting	-	-	8-3/4	1/4

Weight (lbs): 0.50



## MAGNETIC BIT SCREWDRIVERS

- › Extra-long handle allows greater access to confined, restricted areas.
- › Convenient bit storage in handle.

Product #	Shank Type	Overall Length (in)	Weight (lbs)
<b>J9300MS</b>	1/4" Hex	7-9/16	0.15



## MAGNETIC BIT HOLDERS

- › Magnetic to hold the bit in place.

Product #	Drive Size (in)	Overall Length (in)	Weight (lbs)
<b>J61222</b>	1/4	2-1/4	0.07
<b>J61234</b>	1/4	2-11/32	0.05
<b>J61223</b>	1/4	2-31/32	0.08
<b>J61236</b>	1/4	3	0.06
<b>J61238</b>	1/4	3	0.10
<b>J61224</b>	1/4	4	0.12
<b>J61226</b>	1/4	6	0.20



## MAGNETIZER/DEMAGNETIZER

- › Use for screwdrivers.

Product #	Weight (lbs)
<b>J9888</b>	0.14





## 38 PIECE INSERT/POWER BIT SET

Product #: **J61906**

Not for use on impact applications.

- ▶ Magnetic base provides tool organization as well as portability.
- ▶ Strong magnetic bond allows for superior holding strength.
- ▶ Holder allows bits to remain organized in a tool box drawer as well as on any metal surface.
- ▶ Mixed assortment of standard, slotted, Phillips, and Torx® Tips and clutches to help in a variety of tasks.



POWER BIT SETS

Description	Tip Size	Tips	Overall Length (in)	Drive Size
Bit, Insert #0 Phillips 1/4" Hex	0	Phillips	1	1/4
Bit, Insert #1 Phillips 1/4" Hex	1	Phillips	1	1/4
Bit, Insert #2 Phillips 1/4" Hex	2	Phillips	1	1/4
Bit, Insert #3 Phillips 1/4" Hex	3	Phillips	1	1/4
Bit, Insert #2 Phillips 1/4" Hex (Reduced Dia.)	2	Phillips	1	1/4
Bit, Insert #1 PZ 1/4" Hex	1	Pozidriv®	1	1/4
Bit, Insert #2 PZ 1/4" Hex	2	Pozidriv®	1	1/4
Bit, Insert Slotted 1/4" Hex	4F-5R	Slotted	1	1/4
Bit, Insert Slotted 1/4" Hex	6F-8R	Slotted	1	1/4
Bit, Insert Slotted 1/4" Hex	8F-10R	Slotted	1	1/4
Bit, Insert Slotted 1/4" Hex	10F-12R	Slotted	1	1/4
Bit, Insert Slotted 1/4" Hex	12F-14R	Slotted	1/2	1/4
Bit, Insert Slotted 1/4" Hex	14F-16R	Slotted	1/2	1/4
Bit, Insert T6 Torx® 1/4" Hex	T6	Torx®	1	1/4
Bit, Insert T7 Torx® 1/4" Hex	T7	Torx®	1	1/4
Bit, Insert T8 Torx® 1/4" Hex	T8	Torx®	1	1/4
Bit, Insert T9 Torx® 1/4" Hex	T9	Torx®	1	1/4
Bit, Insert T10 Torx® 1/4" Hex	T10	Torx®	1	1/4
Bit, Insert T15 Torx® 1/4" Hex	T15	Torx®	1	1/4
Bit, Insert T20 Torx® 1/4" Hex	T20	Torx®	1	1/4
Bit, Insert T25 Torx® 1/4" Hex	T25	Torx®	1	1/4
Bit, Insert T30 Torx® 1/4" Hex	T30	Torx®	1	1/4
Bit, Insert T40 Torx® 1/4" Hex	T40	Torx®	1	1/4
3/32" Socket Head, 1/4" Hex	3/32	Socket	1-1/4	1/4
7/64" Socket Head, 1/4" Hex	7/64	Socket	1-1/4	1/4
1/8" Socket Head, 1/4" Hex	1/8	Socket	1-1/4	1/4
9/64" Socket Head, 1/4" Hex	9/64	Socket	1-1/4	1/4
5/32" Socket Head, 1/4" Hex	5/32	Socket	1-1/4	1/4
3/16" Socket Head, 1/4" Hex	3/16	Socket	1-1/4	1/4
Bit, Insert #0 Square Recess 1/4" Hex	0	Square	1	1/4
Bit, Insert #1 Square Recess 1/4" Hex	1	Square	1	1/4
Bit, Insert #2 Square Recess 1/4" Hex	2	Square	1	1/4
Bit, Insert #3 Square Recess 1/4" Hex	3	Square	1	1/4
Bit, Insert 1/8" Clutch, 1/4" Hex	1/8	Clutch	1	1/4
Bit, Insert 5/32" Clutch, 1/4" Hex	5/32	Clutch	1	1/4
Bit, Insert 3/16" Clutch, 1/4" Hex	3/16	Clutch	1	1/4
Bit, Holder Magnetic 1/4" Hex			2-1/4	1/4
Bit, Holder Power 1/4" Dr 1/4" Hex			1	1/4

Weight (lbs): 1.21



## 91 PIECE MULTI-BIT SET

Product #: **J61390**

- › Packaged in blow-molded case for easy storage and organization.
- › 1/4" Hex Ratcheting Magnetic Bit Driver:
  - › Magnetic driver keeps bits securely in place while holding fasteners to bit.
  - › Forward-lock-reverse switch mechanism.
  - › Four-sided ergonomic design handle with bi-material non-slip grip.
  - › Knurled shaft for ease-of-use when trying to spin shaft by hand.
- › 1/4" Hex Magnetic T-Handle Bit Driver:
  - › Magnetic drive end holds bit securely in place while holding fasteners to bit.
  - › Dual drive ends for optimal accessibility.



Torx® is a trademark of Acument Intellectual Properties, LLC





Contents	Description
J9323	1/4" Hex Ratcheting Magnetic Bit Driver
J9324	1/4" Hex Magnetic T-Handle Bit Driver

Description	Tip Size (in)	Tips
Tamper Hex Bit 5/64" - 1"	5/64	Tamper Hex
Tamper Hex Bit 3/32" - 1"	3/32	Tamper Hex
Tamper Hex Bit 7/64" - 1"	7/64	Tamper Hex
Tamper Hex Bit 1/8" - 1"	1/8	Tamper Hex
Tamper Hex Bit 9/64" - 1"	9/64	Tamper Hex
Tamper Hex Bit 5/32" - 1"	5/32	Tamper Hex
Tamper Hex Bit 3/16" - 1"	3/16	Tamper Hex
Tamper Hex Bit 7/32" - 1"	7/32	Tamper Hex
Tamper Hex Bit 1/4" - 1"	1/4	Tamper Hex
Tamper Hex Bit 9/32" - 1"	9/32	Tamper Hex
Tamper Hex Bit 5/16" - 1"	5/16	Tamper Hex
Tamper Hex Bit 3/8" - 1"	3/8	Tamper Hex
Tamper Hex Bit 2" - 1"	2	Tamper Hex
Tamper Hex Bit 2.5" - 1"	2.5	Tamper Hex
Tamper Hex Bit 3" - 1"	3	Tamper Hex
Tamper Hex Bit 4" - 1"	4	Tamper Hex
Tamper Hex Bit 5" - 1"	5	Tamper Hex
Tamper Hex Bit 6" - 1"	6	Tamper Hex
Tamper Torx® Bit 6" - 1"	6	Tamper Torx®
Tamper Torx® Bit 7" - 1"	7	Tamper Torx®
Tamper Torx® Bit 8" - 1"	8	Tamper Torx®
Tamper Torx® Bit 9" - 1"	9	Tamper Torx®
Tamper Torx® Bit 10" - 1"	10	Tamper Torx®
Tamper Torx® Bit 15" - 1"	15	Tamper Torx®
Tamper Torx® Bit 20" - 1"	20	Tamper Torx®
Tamper Torx® Bit 25" - 1"	25	Tamper Torx®
Tamper Torx® Bit 27" - 1"	27	Tamper Torx®
Tamper Torx® Bit 30" - 1"	30	Tamper Torx®
Tamper Torx® Bit 40" - 1"	40	Tamper Torx®
Torx® Bit 6" - 1"	6	Torx®
Torx® Bit 7" - 1"	7	Torx®
Torx® Bit 8" - 1"	8	Torx®
Torx® Bit 10" - 1"	10	Torx®
Torx® Bit 15" - 1"	15	Torx®
Torx® Bit 20" - 1"	20	Torx®
Torx® Bit 25" - 1"	25	Torx®
Torx® Bit 27" - 1"	27	Torx®
Torx® Bit 30" - 1"	30	Torx®
Torx® Bit 40" - 1"	40	Torx®
Torx® Bit 45" - 1"	45	Torx®
Torx® Bit 50" - 1"	50	Torx®

Description	Tip Size (in)	Tips
Square Bit 0" - 1"	0	Square
Square Bit 1" - 1"	1	Square
Square Bit 2" - 1"	2	Square
Square Bit 3" - 1"	3	Square
Ball End Hex Bit 1/8" - 1"	1/8	Ball End Hex
Ball End Hex Bit 5/32" - 1"	5/32	Ball End Hex
Ball End Hex Bit 3/16" - 1"	3/16	Ball End Hex
Ball End Hex Bit 7/32" - 1"	7/32	Ball End Hex
Ball End Hex Bit 1/4" - 1"	1/4	Ball End Hex
Ball End Hex Bit 2.5" - 1"	2.5	Ball End Hex
Ball End Hex Bit 3" - 1"	3	Ball End Hex
Ball End Hex Bit 4" - 1"	4	Ball End Hex
Ball End Hex Bit 5" - 1"	5	Ball End Hex
Ball End Hex Bit 5.5" - 1"	5.5	Ball End Hex
Ball End Hex Bit 6" - 1"	6	Ball End Hex
Phillips Bit 0" - 1"	0	Phillips
Phillips Bit 1" - 1"	1	Phillips
Phillips Bit 2" - 1"	2	Phillips
Phillips Bit 3" - 1"	3	Phillips
Phillips Bit 4" - 1"	4	Phillips
Slotted Bit 1/8" - 1"	1/8	Slotted
Slotted Bit 5/32" - 1"	5/32	Slotted
Slotted Bit 3/16" - 1"	3/16	Slotted
Slotted Bit 7/32" - 1"	7/32	Slotted
Slotted Bit 1/4" - 1"	1/4	Slotted
Slotted Bit 9/32" - 1"	9/32	Slotted
Tri-Wing Bit 1" - 1"	1	Tri-Wing
Tri-Wing Bit 2" - 1"	2	Tri-Wing
Tri-Wing Bit 3" - 1"	3	Tri-Wing
Tri-Wing Bit 4" - 1"	4	Tri-Wing
Spanner Bit 4" - 1"	4	Spanner
Spanner Bit 6" - 1"	6	Spanner
Spanner Bit 8" - 1"	8	Spanner
Spanner Bit 10" - 1"	10	Spanner
Spline Bit M5" - 1"	M5	Spline
Spline Bit M6" - 1"	M6	Spline
Spline Bit M8" - 1"	M8	Spline
Torq-Set Bit 6" - 1"	6	Torq-Set
Torq-Set Bit 8" - 1"	8	Torq-Set
Torq-Set Bit 10" - 1"	10	Torq-Set
Clutch Bit 5/32" - 1"	5/32	Clutch
Clutch Bit 3/16" - 1"	3/16	Clutch
Clutch Bit 1/4" - 1"	1/4	Clutch
Bit Adapter Bit 1/4" - 1"	1/4	Bit Adapter
Bit Adapter Bit 1/4" - 2"	1/4	Bit Adapter
Quick-Change Chuck Bit 1/4" - 2-1/2"	1/4	Quick-Change Chuck
Wing Nut Bit Wing Nut" - 1-1/4"	Wing Nut	Wing Nut
Bit Coupler Bit 1/4" - 1"	1/4	Bit Coupler

Weight (lbs): 3.04

## 10 PIECE INSERT BIT SET WITH STORAGE BOX

Product #: **J61901**

- › Popular bits in compact storage box which doubles as a screwdriver handle.
- › Bits are power tool rated and can be used with Cordless and Electric Drills.



Contents	Description	Tip Size	Tips	Overall Length (in)	Drive Size (in)	Hex Size (in)
J60002	Bit, Insert # 1 Phillips 1/4" Hex	#1	Phillips	1	1/4	1/4
J60008	Bit, Insert # 2 Phillips 1/4" Hex	#2	Phillips	1	1/4	1/4
J60020	Bit, Insert # 3 Phillips 1/4" Hex	#3	Phillips	1	1/4	1/4
J60202	Bit, Insert 3/16" Slotted 1/4" Hex	3/16	Keystone Slotted	1	1/4	1/4
J60206	Bit, Insert 5/32" Slotted 1/4" Hex	5/32	Keystone Slotted	1	1/4	1/4
J60216	Bit, Insert 7/32" Slotted 1/4" Hex	7/32	Keystone Slotted	1	1/4	1/4
J60508	Bit, Insert T10 Torx® 1/4" Hex	T10	Torx®	1	1/4	1/4
J60510	Bit, Insert T15 Torx® 1/4" Hex	T15	Torx®	1	1/4	1/4
J60808	Bit, Hex 1/4" Socket Head 1/8"	1/8	Socket	1-1/4	1/4	1/8
J61223	Bit, Holder Magnetic 1/4" Hex			2-31/32	1/4	1/4

Weight (lbs): 0.39



## 1/4" & 3/8" DRIVE 11 PIECE TORX® BIT SET

Product #: **J5239P**

- › Not for use on impact applications.
- › T10 to T50, 2 Bit Holders, with Pouch.
- › 1/4" and 3/8" drive, 1/4" and 5/16" hex.



Contents	Description	Tip Size	Overall Length (in)	Drive Size (in)	Hex Size (in)
J60508	Bit, Insert T10 Torx® 1/4" Hex	T10	1	1/4	1/4
J60510	Bit, Insert T15 Torx® 1/4" Hex	T15	1	1/4	1/4
J60512	Bit, Insert T20 Torx® 1/4" Hex	T20	1	1/4	1/4
J60514	Bit, Insert T25 Torx® 1/4" Hex	T25	1	1/4	1/4
J60516	Bit, Insert T27 Torx® 1/4" Hex	T27	1	1/4	1/4
J60518	Bit, Insert T30 Torx® 1/4" Hex	T30	1	1/4	1/4
J60562	Bit, Insert T40 Torx® 5/16" Hex	T40	1	5/16	5/16
J60564	Bit, Insert T45 Torx® 5/16" Hex	T45	1	5/16	5/16
J60566	Bit, Insert T50 Torx® 5/16" Hex	T50	1	5/16	5/16
J6930	Bit Holder 3/8" DR 5/16" Hex		1-5/16	1/4	1/4
J6931	Bit Holder 3/8" DR 1/4" Hex		1-3/4	1/4	5/16
J25TR50C	Tool Roll, 1 Pocket		6-1/3		

Weight (lbs): 0.36



Torx® is a trademark of Acument Intellectual Properties, LLC



## 3/8" DRIVE 7 PIECE TORX® BIT SOCKET SET

Product #: **J4739P**

- › Not for use on impact applications.



Contents	Description	Tip Size	Overall Length (in)	Drive Size (in)	Hex Size (in)
J60508	Bit, Insert T10 Torx® 1/4" Hex	T10	1	1/4	1/4
J60510	Bit, Insert T15 Torx® 1/4" Hex	T15	1	1/4	1/4
J60512	Bit, Insert T20 Torx® 1/4" Hex	T20	1	1/4	1/4
J60514	Bit, Insert T25 Torx® 1/4" Hex	T25	1	1/4	1/4
J60516	Bit, Insert T27 Torx® 1/4" Hex	T27	1	1/4	1/4
J60518	Bit, Insert T30 Torx® 1/4" Hex	T30	1	1/4	1/4
J6931	Bit Holder 3/8" DR 1/4" Hex		1-3/4	3/8	1/4
J25TR50C	Tool Roll, 1 Pocket		6-1/3		

Weight (lbs): 0.19



## PHILLIPS INSERT BITS

- › Not for use on impact applications.



Product #	Tips	Tip Size	Drive Size (in)	Overall Length (in)	Weight (lbs)
<b>J60002</b>	Phillips	#1	1/4	1	0.01
<b>J60008</b>	Phillips	#2	1/4	1	0.01
<b>J60020</b>	Phillips	#3	1/4	1	0.01
<b>J60050</b>	Phillips	#1	5/16	1-1/4	0.02
<b>J60052</b>	Phillips	#2	5/16	1-1/4	0.02
<b>J60054</b>	Phillips	#3	5/16	1-1/4	0.03



## PHILLIPS ACR® INSERT BITS

- › Not for use on impact applications.



Product #	Tips	Tip Size	Drive Size (in)	Overall Length (in)	Weight (lbs)
<b>J60004</b>	Phillips ACR®	#1	1/4	1	0.01
<b>J60010</b>	Phillips ACR®	#2	1/4	1	0.01
<b>J60022</b>	Phillips ACR®	#3	1/4	1	0.01



## PHILLIPS POWER TOOL INSERT BITS

› Not for use on impact applications.



Product #	Tips	Tip Size	Drive Size (in)	Overall Length (in)	Weight (lbs)
J60100	Phillips	#1	1/4	1-15/16	0.02
J60102	Phillips	#2	1/4	1-15/16	0.02
J60014	Phillips	#2	1/4	1-1/2	0.02
J60116	Phillips	#2	1/4	2-51/64	0.03
J60018	Phillips	#2	1/4	3-45/64	0.03



## SLOTTED INSERT BITS

› Not for use on impact applications.



Product #	Tips	Tip Size (in)	Drive Size (in)	Overall Length (in)	Weight (lbs)
J60200	Keystone Slotted	5/32	1/4	1	0.01
J60202	Keystone Slotted	3/16	1/4	1	0.01
J60204	Keystone Slotted	7/32	1/4	1	0.01
J60206	Keystone Slotted	5/32	1/4	1	0.01
J60208	Keystone Slotted	9/32	1/4	1	0.01
J60256	Keystone Slotted	3/8	5/16	1-1/2	0.03
J60262	Keystone Slotted	3/8	5/16	1-1/2	0.03



## TORX® INSERT BITS

› Not for use on impact applications.



Product #	Tips	Tip Size	Drive Size (in)	Overall Length (in)	Weight (lbs)
J60500	Torx®	T6	1/4	1	0.01
J60502	Torx®	T7	1/4	1	0.01
J60504	Torx®	T8	1/4	1	0.01
J60506	Torx®	T9	1/4	1	0.01
J60508	Torx®	T10	1/4	1	0.01
J60510	Torx®	T15	1/4	1	0.01
J60512	Torx®	T20	1/4	1	0.01
J60514	Torx®	T25	1/4	1	0.01
J60516	Torx®	T27	1/4	1	0.01
J60518	Torx®	T30	1/4	1	0.01
J60520	Torx®	T40	1/4	1	0.02
J60560	Torx®	T30	5/16	1-1/2	0.02
J60562	Torx®	T40	5/16	1	0.02
J60564	Torx®	T45	5/16	1	0.03
J60566	Torx®	T50	5/16	1	0.03
J60568	Torx®	T55	5/16	1-19/64	0.04



Torx® is a trademark of Acument Intellectual Properties, LLC



## TORX® POWER TOOL INSERT BIT

› Not for use on impact applications.



Product #	Tips	Tip Size	Drive Size (in)	Overall Length (in)	Weight (lbs)
J60666	Torx®	T10	1/4	6	0.04



INSERT BITS

## TORX® TAMPER-PROOF INSERT BITS



› Not for use on impact applications.



Product #	Tips	Tip Size	Drive Size (in)	Overall Length (in)	Weight (lbs)
J60530	Tamper Torx®	T10H	1/4	1	0.01
J60532	Tamper Torx®	T15H	1/4	1	0.01
J60534	Tamper Torx®	T20H	1/4	1	0.01
J60536	Tamper Torx®	T25H	1/4	1	0.01
J60538	Tamper Torx®	T27H	1/4	1	0.01
J60540	Tamper Torx®	T30H	1/4	1	0.01
J60542	Tamper Torx®	T40H	1/4	1	0.01



## SQUARE INSERT BITS

› Not for use on impact applications.



Product #	Tips	Tip Size	Drive Size (in)	Overall Length (in)	Weight (lbs)
J61002	Square	#1	1/4	1	0.01
J61004	Square	#2	1/4	1	0.01
J61006	Square	#3	1/4	1	0.01



## BIT HOLDERS

- › Not for use on impact applications.

Product #	Drive Size (in)	Overall Length (in)	Weight (lbs)
<b>J61200</b>	1/4	2-1/4	0.04
<b>J61204</b>	1/4	4	0.12



## LOCKING ADAPTER (MALE TO MALE)

Product #: **J4759BL**

Product #	Output Drive Size (in)	Overall Length (in)	Weight (lbs)
<b>J4759BL</b>	1/4	2-1/2	0.07



## POWER BIT HOLDERS

- › Not for use on impact applications.

Product #	Input Drive Size (in)	Insert Hex Size (in)	Overall Length (in)	Weight (lbs)
<b>J6925</b>	1/4	1/4	1	0.04
<b>J6930</b>	3/8	1/4	1-5/16	0.07
<b>J6931</b>	3/8	5/16	1-3/4	0.07
<b>J6935</b>	1/2	5/16	1-1/2	0.11



## SQUARE EXTENSIONS

- › Made of forged steel.
- › Size stamped on tool for easy identification.
- › Ball detent.

Product #	Tips	Input Hex Size (in)	Output Male Square (in)	Style	Overall Length (in)	Weight (lbs)
<b>J61302</b>	Square	1/4	1/4	Pin	2	0.04
<b>J61303</b>	Square	1/4	1/4	Pin	3	0.05
<b>J61304</b>	Square	1/4	1/4	Pin	4	0.08
<b>J61306</b>	Square	1/4	1/4	Pin	6	0.12
<b>J61352</b>	Square	1/4	1/4	Ball	2	0.04
<b>J61402</b>	Square	1/4	3/8	Pin	2	0.05
<b>J61404</b>	Square	1/4	3/8	Pin	4	0.13
<b>J61406</b>	Square	1/4	3/8	Pin	6	0.13
<b>J61502</b>	Square	7/16	3/8	Ball	2	0.05



## EXTENSIONS - 7/16" HEX SHANK

- › Made of forged steel.
- › Size stamped on tool for easy identification.
- › Not for use on impact applications.

Product #	Tips	Input Hex Size (in)	Output Male Square (in)	Overall Length (in)	Weight (lbs)
<b>J7111</b>	Square	7/16	3/8	2-3/4	0.14
<b>J7121</b>	Square	7/16	1/2	2-3/4	0.17





## SLOTTED MAGNETIC SCREW STARTERS

- › Pocket clip.

Product #	Overall Length (in)	Weight (lbs)
<b>J9851</b>	2-5/8	0.02
<b>J9853</b>	5-5/8	0.04
<b>J9855</b>	9-5/8	0.09



## PHILLIPS MAGNETIC SCREW STARTERS

- › Pocket clip.

Product #	Overall Length (in)	Weight (lbs)
<b>J9882</b>	2-3/4	0.02
<b>J9884</b>	5-3/4	0.05
<b>J9886</b>	9-3/4	0.06



## COMBINATION SCREW STARTERS

- › Pocket clip.

Product #	Overall Length (in)	Weight (lbs)
<b>J9866</b>	6-1/4	0.04



## 18 PIECE HEX KEY SET

Product #: **J4986**

- ▶ Metal storage box included.

Contents	INCH	Long Arm Length (in)	Short Arm Length (in)
J46101	1/32	1-1/4	1/8
J46102	1/32	1-1/4	3/16
J46103	3/64	1-11/16	1/2
J46104	1/16	1-3/4	9/16
J46105	5/64	1-7/8	5/8
J46106	3/32	2	11/16
J46107	7/64	2-1/8	23/32
J46108	1/8	2-1/4	3/4
J46109	9/64	2-3/8	13/16
J46110	5/32	2-1/2	27/32
J46112	3/16	2-3/4	15/16
J46114	7/32	3	1
J46116	1/4	3-1/4	1-1/8
J46120	5/16	3-3/4	1-1/4
J46124	3/8	4-1/4	1-3/8
J46132	1/2	5-1/4	1-5/8
J46136	9/16	5-3/4	1-3/4
J46140	5/8	6-1/4	1-7/8

Weight (lbs): 3.36

ASME B18.3 




## 13 PIECE HEX KEY SET

Product #: **J4980**

- ▶ Molded plastic holder included.

Contents	INCH	Long Arm Length (in)	Short Arm Length (in)
J46103	3/64	1-11/16	1/2
J46104	1/16	1-3/4	9/16
J46105	5/64	1-7/8	5/8
J46106	3/32	2	11/16
J46107	7/64	2-1/8	23/32
J46108	1/8	2-1/4	3/4
J46109	9/64	2-3/8	13/16
J46110	5/32	2-1/2	27/32
J46112	3/16	2-3/4	15/16
J46114	7/32	3	1
J46116	1/4	3-1/4	1-1/8
J46120	5/16	3-3/4	1-1/4
J46124	3/8	4-1/4	1-3/8

Weight (lbs): 0.60

ASME B18.3 







## 7 PIECE HEX KEY SET

Product #: **J4982**

- ▶ Molded plastic holder included.

Contents	INCH	Long Arm Length (in)	Short Arm Length (in)
J46105	5/64	1-7/8	5/8
J46106	3/32	2	11/16
J46108	1/8	2-1/4	3/4
J46110	5/32	2-1/2	27/32
J46112	3/16	2-3/4	15/16
J46114	7/32	3	1
J46116	1/4	3-1/4	1-1/8

Weight (lbs): 1.20

ASME B18.3



HEX KEY SETS

## 13 PIECE ROUND HEAD HEX KEY SET

Product #: **J4995**

- ▶ Ball end can tighten or loosen screws at angles up to 25°.
- ▶ Molded plastic holder included.

INCH	Long Arm Length (in)	Short Arm Length (in)
3/64	2-55/64	33/64
1/16	3-1/64	9/16
5/64	3-3/16	39/64
3/32	3-3/8	21/32
7/64	3-19/32	45/64
1/8	3-3/4	3/4
9/64	3-63/64	13/16
5/32	4-7/32	53/64
3/16	4-1/2	61/64
7/32	4-29/32	1-1/32
1/4	5-33/64	1-3/32
5/16	6-1/32	1-1/4
3/8	6-23/32	1-25/64

Weight (lbs): 0.82

ASME B18.3




## 9 PIECE ROUND HEAD HEX KEY SET - METRIC

Product #: J4996

- ▶ Ball end can tighten or loosen screws at angles up to 25°.
- ▶ Molded plastic holder included.

MM	Long Arm Length (in)	Short Arm Length (in)
1.5	3-3/64	1/2
2	3-1/4	39/64
2.5	3-1/2	45/64
3	3-7/8	47/64
4	4-11/32	55/64
5	4-45/64	1-1/16
6	5-7/16	1-7/32
8	6-1/64	1-3/8
10	6-11/16	1-17/32

Weight (lbs): 1.70

ASME B18.3 




## 14 PIECE LONG HEX KEY SET

Product #: J4987

- ▶ Metal storage box included.

Contents	INCH	Long Arm Length (in)	Short Arm Length (in)
J46203	3/64	2-7/8	1/2
J46204	1/16	3	9/16
J46205	5/64	3-3/16	5/8
J46206	3/32	3-3/8	11/16
J46207	7/64	3-9/16	23/32
J46208	1/8	3-3/4	3/4
J46209	9/64	3-15/16	13/16
J46210	5/32	4-1/8	27/32
J46212	3/16	4-1/2	15/16
J46214	7/32	4-7/8	1
J46216	1/4	5-1/4	1-1/8
J46220	5/16	6	1-1/4
J46224	3/8	6-3/4	1-3/8
J46232	1/2	8-1/4	1-5/8

Weight (lbs): 2.28

ASME B18.3 





## 15 PIECE HEX KEY SET - METRIC

Product #: **J4988M**

- › Metal storage box included.

Contents	MM	Long Arm Length (in)	Short Arm Length (in)
J46300	0.7	1-7/32	15/64
J46302	0.9	1-7/32	23/64
J46304	1.3	1-39/64	33/64
J46306	1.5	1-47/64	33/64
J46308	2	1-59/64	5/8
J46310	2.5	2-11/64	45/64
J46312	3	2-7/16	3/4
J46314	4	2-43/64	15/16
J46316	5	3-5/64	1-1/16
J46318	6	3-15/32	1-7/32
J46320	8	3-55/64	1-3/8
J46322	10	4-19/64	1-17/32
J46324	12	4-51/64	1-47/64
J46326	14	5-23/64	2-11/64
J46328	17	6-9/64	2-13/32

Weight (lbs): 3.40

ASME B18.3.2M 



HEX KEY SETS


## 9 PIECE HEX KEY SET - METRIC

Product #: **J4984**

- › Molded plastic holder included.

Contents	MM	Long Arm Length (in)	Short Arm Length (in)
J46306	1.5	1-47/64	33/64
J46308	2	1-59/64	5/8
J46310	2.5	2-11/64	45/64
J46312	3	2-7/16	3/4
J46314	4	2-43/64	15/16
J46316	5	3-5/64	1-1/16
J46318	6	3-15/32	1-7/32
J46320	8	3-55/64	1-3/8
J46322	10	4-19/64	1-17/32

Weight (lbs): 0.54

ASME B18.3.2M 




## 7 PIECE HEX KEY SET - METRIC

Product #: **J4985**

- › Molded plastic holder.
- › Hex size ranges from 1.5 mm to 6 mm.

Contents	MM	Long Arm Length (in)	Short Arm Length (in)
J46306	1.5	1-47/64	33/64
J46308	2	1-59/64	5/8
J46310	2.5	2-11/64	45/64
J46312	3	2-7/16	3/4
J46314	4	2-43/64	15/16
J46316	5	3-5/64	1-1/16
J46318	6	3-15/32	1-7/32

Weight (lbs): 0.16

ASME B18.3.2M 



## 10 PIECE TORX® KEY SET

Product #: **J4961**

- › Torx® Size: T10, T15, T20, T25, T27, T30, T40, T45, T50, T55, and Plastic Pouch.

Torx® Size	Long Arm Length (in)	Short Arm Length (in)
T10	2-9/32	27/32
T15	2-15/32	57/64
T20	2-23/32	15/16
T25	3-1/64	1-1/64
T27	3-3/8	1-9/64
T30	3-3/4	1-13/64
T40	4-1/8	1-21/64
T45	4-9/64	1-31/64
T50	4-3/16	1-35/64
T55	4-9/64	1-23/32
Plastic Pouch		

Weight (lbs): 0.76



Torx® is a trademark of Acument Intellectual Properties, LLC




## 17 PIECE T-HANDLE HEX KEY SET

**Product #: J4970S**

- › T-handle design for greater torque.
- › Cushion grip handle provides added comfort.
- › Hex size printed on handle for easy size identification.

Contents	INCH	Handle Length (in)	Length (in)
J46405	5/64	3	6
J46406	3/32	3	6
J46407	7/64	3	6
J46408	1/8	3	6
J46409	9/64	3	6
J46410	5/32	3	6
J46412	3/16	4	6
J46414	7/32	4	6
J46416	1/4	4	6
J46420	5/16	6	6
J46424	3/8	6	6

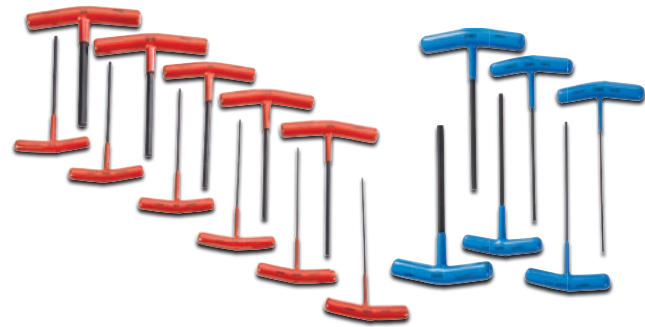

Contents	MM	Handle Length (in)	Length (in)
J46508	2	3	6
J46510	2.5	3	6
J46512	3	3	6
J46514	4	3	6
J46516	5	4	6
J46518	6	4	6

Weight (lbs): 4.66



## 11 PIECE T-HANDLE HEX KEY SET

**Product #: J4968**

- › T-handle design for greater torque.
- › Cushion grip handle provides added comfort.
- › Hex size printed on handle for easy size identification.

Contents	INCH	Handle Length (in)	Length (in)
J46405	5/64	3	6
J46406	3/32	3	6
J46407	7/64	3	6
J46408	1/8	3	6
J46409	9/64	3	6
J46410	5/32	3	6
J46412	3/16	4	6
J46414	7/32	4	6
J46416	1/4	4	6
J46420	5/16	6	6
J46424	3/8	6	6

Weight (lbs): 3.98



## 6 PIECE METRIC T-HANDLE HEX KEY SET

**Product #: J4969**

- › T-handle design for greater torque.
- › Cushion grip handle provides added comfort.
- › Hex size printed on handle for easy size identification.

Contents	MM	Handle Length (in)	Length (in)
J46508	2	3	6
J46510	2.5	3	6
J46512	3	3	6
J46514	4	3	6
J46516	5	4	6
J46518	6	4	6

Weight (lbs): 1.00



## 9 PIECE FOLDING HEX KEY SET

Product #: **J4993CG**

INCH	Set Screws	Fits Cap Screws 1960 Series	Cap Screws 1936 Series
5/64	#8	#2, #3	#3, #4
3/32	#10, #12	#4, #5	#5, #6
7/64	–	#6	–
1/8	1/4"	–	#8
9/64	–	#8	–
5/32	5/16"	#10	#10
3/16	3/8"	1/4"	1/4"
7/32	7/16"	–	5/16"
1/4	1/2", 9/16"	5/16"	–

Weight (lbs): 0.47

ASME B18.3 

- › 4" long case.
- › Black oxide bits are 1" to 2" long.




## 9 PIECE FOLDING HEX KEY SET

Product #: **J4992CG**

INCH	Set Screws	Fits Cap Screws 1960 Series	Cap Screws 1936 Series
3/64	#3, #4	#0	#0, #1
1/16	#5, #6	#1	#2
5/64	#8	#2, #3	#3, #4
3/32	#10, #12	#4, #5	#5, #6
7/64	–	#6	–
1/8	1/4"	–	#8
9/64	–	#8	–
5/32	5/16"	#10	#10
3/16	3/8"	1/4"	1/4"

Weight (lbs): 0.18

ASME B18.3 

- › Case is 3" long.
- › Black oxide bits are 1-21/64" to 2" long.



## 6 PIECE FOLDING HEX KEY SET

Product #: **J4996CG**

INCH	Set Screws	Fits Cap Screws 1960 Series	Cap Screws 1936 Series
5/32	5/16"	#10	#10
3/16	3/8"	1/4"	1/4"
7/32	7/16"	–	5/16"
1/4	1/2, 9/16"	5/16"	–
5/16	5/8"	3/8"	3/8, 7/16"
3/8	3/4"	7/16, 1/2"	1/2, 9/16"

Weight (lbs): 0.24



- › Case is 5-1/2" long.



Torx® is a trademark of Acument Intellectual Properties, LLC




## 7 PIECE METRIC LONG FOLDING HEX KEY SET

Product #: **J4974CG**

- › 3" long case.

MM	Length (in)
1.5	3
2	3
2.5	3
3	3
4	3
5	3
6	3

Weight (lbs): 0.31

ASME B18.3.2M 




## 6 PIECE METRIC LONG FOLDING HEX KEY SET

Product #: **J4973CG**

- › Case is 6" long.
- › Black oxide bits are 2-3/16" to 3-7/8 long.

MM	Length (in)
3	3
4	3
5	3
6	3
8	3
10	3

Weight (lbs): 0.84

ASME B18.3.2M 



## 8 PIECE TORX® FOLDING KEY SET

Product #: **J4979TXCG**

Torx® Size	Length (in)
T8	3
T10	3
T15	3
T20	3
T25	3
T27	3
T30	3
T40	3

Weight (lbs): 0.45



# STANDARD HEX KEYS

- › Heat-treated for durability.
- › Rust resistant black oxide finish.



Product #	INCH	MM	Long Arm Length (in)	Short Arm Length (in)	Weight (lbs)
J46101	1/32	–	1-1/4	1/8	0.01
J46102	1/32	–	1-1/4	3/16	0.01
J46103	3/64	–	1-11/16	1/2	0.01
J46104	1/16	–	1-3/4	9/16	0.01
J46105	5/64	–	1-7/8	5/8	0.01
J46106	3/32	–	2	11/16	0.01
J46107	7/64	–	2-1/8	23/32	0.01
J46108	1/8	–	2-1/4	3/4	0.01
J46109	9/64	–	2-3/8	13/16	0.02
J46110	5/32	–	2-1/2	27/32	0.02
J46112	3/16	–	2-3/4	15/16	0.03
J46114	7/32	–	3	1	0.05
J46116	1/4	–	3-1/4	1-1/8	0.07
J46120	5/16	–	3-3/4	1-1/4	0.1
J46124	3/8	–	4-1/4	1-3/8	0.19
J46128	7/16	–	4-3/4	1-1/2	0.31
J46132	1/2	–	5-1/4	1-5/8	0.31
J46136	9/16	–	5-3/4	1-3/4	0.31
J46140	5/8	–	6-1/4	1-7/8	0.58
J46300	–	0.7	1-7/32	15/64	0.01
J46302	–	0.9	1-7/32	23/64	0.01
J46304	–	1.3	1-39/64	33/64	0.01
J46306	–	1.5	1-47/64	33/64	0.01
J46308	–	2	1-59/64	5/8	0.01
J46310	–	2.5	2-11/64	45/64	0.01
J46312	–	3	2-7/16	3/4	0.01
J46314	–	4	2-43/64	15/16	0.01
J46316	–	5	3-5/64	1-1/16	0.04
J46318	–	6	3-15/32	1-7/32	0.07
J46320	–	8	3-55/64	1-3/8	0.13
J46322	–	10	4-19/64	1-17/32	0.23
J46324	–	12	4-51/64	1-47/64	0.36
J46326	–	14	5-23/64	2-11/64	0.57
J46328	–	17	6-9/64	2-13/32	0.95

ASME B18.3 





### LONG HEX KEYS

- ▶ Heat-treated for durability.
- ▶ Rust resistant black oxide finish.



Product #	INCH	Long Arm Length (in)	Short Arm Length (in)	Weight (lbs)
J46203	3/64	2-7/8	1/2	0.01
J46204	1/16	3	9/16	0.01
J46205	5/64	3-3/16	5/8	0.01
J46206	3/32	3-3/8	11/16	0.01
J46207	7/64	3-9/16	23/32	0.01
J46208	1/8	3-3/4	3/4	0.02
J46209	9/64	3-15/16	13/16	0.03
J46210	5/32	4-1/8	27/32	0.03
J46212	3/16	4-1/2	15/16	0.05
J46214	7/32	4-7/8	1	0.07
J46216	1/4	5-1/4	1-1/8	0.10
J46220	5/16	6	1-1/4	0.17
J46224	3/8	6-3/4	1-3/8	0.28
J46228	7/16	7-1/2	1-1/2	0.45
J46232	1/2	8-1/4	1-5/8	0.61

ASME B18.3

### ROUND HEAD HEX KEYS

- ▶ Ball end can tighten or loosen screws at angles up to 25°.



Product #	INCH	MM	Long Arm Length (in)	Short Arm Length (in)	Weight (lbs)
J46103B	3/64	-	2-5/16	1/2	0.01
J46104B	1/16	-	3-1/16	9/16	0.01
J46105B	5/64	-	3-1/4	5/8	0.01
J46106B	3/32	-	3-1/2	11/16	0.01
J46107B	7/64	-	3-11/16	23/32	0.01
J46108B	1/8	-	3-7/8	3/4	0.01
J46109B	9/64	-	4-1/8	13/16	0.01
J46110B	5/32	-	4-5/16	27/32	0.02
J46112B	3/16	-	4-11/16	15/16	0.02
J46114B	7/32	-	5-1/8	1	0.03
J46116B	1/4	-	5-1/2	1-1/8	0.05
J46120B	5/16	-	6-1/4	1-1/4	0.07
J46124B	3/8	-	7-1/16	1-3/8	0.1
J46308B	-	2	3-5/16	5/8	0.01
J46310B	-	2.5	3-5/8	45/64	0.01
J46312B	-	3	4-1/64	3/4	0.01
J46314B	-	4	4-31/64	15/16	0.01
J46316B	-	5	5-1/8	1-1/16	0.04
J46318B	-	6	6-9/64	1-7/32	0.07
J46320B	-	8	7-1/64	1-3/8	0.13
J46322B	-	10	7-3/4	1-17/32	0.23

## FACOM® INSULATED HEX KEYS



- › Hardened alloy-steel exceeds specified strengths.
- › 2-color warning insulation.
- › Insulated to 1000V AC or 1500 DC.

Product #	MM	Long Arm Length (in)	Short Arm Length (in)	Weight (lbs)
83.3AVSE	3	4-59/64	3-11/32	0.04
83.4AVSE	4	4-59/64	3-11/32	0.07
83.5AVSE	5	4-59/64	3-11/32	0.11
83.6AVSE	6	4-59/64	3-11/32	0.15
83.8AVSE	8	4-59/64	3-11/32	0.24
83.10AVSE	10	4-59/64	3-11/32	0.33
83.12AVSE	12	4-59/64	3-11/32	0.46



## T-HANDLE HEX KEYS

- › T-handle design for greater torque.
- › Cushion grip handle provides added comfort.
- › Hex size printed on handle for easy size identification.

Product #	INCH	Handle Length (in)	Length (in)	Weight (lbs)
J46405	5/64	3	6	0.11
J46406	3/32	3	6	0.11
J46407	7/64	3	6	0.11
J46408	1/8	3	6	0.14
J46409	9/64	3	6	0.14
J46410	5/32	3	6	0.32
J46412	3/16	4	6	0.32
J46414	7/32	4	6	0.63
J46416	1/4	4	6	0.82
J46420	5/16	6	6	0.89
J46424	3/8	6	6	0.90



## T-HANDLE HEX KEYS - METRIC

- › T-handle design for greater torque.
- › Cushion grip handle provides added comfort.
- › Hex size printed on handle for easy size identification.

Product #	MM	Handle Length (in)	Length (in)	Weight (lbs)
J46508	2	3	6	0.11
J46510	2.5	3	6	0.13
J46512	3	3	6	0.13
J46514	4	3	6	0.14
J46516	5	4	6	0.32
J46518	6	4	6	0.62

